























appendix a - full lighting fixture schedule and cut sheets

Luminaire Schedule

Type	Description	Manufacturer	Catalog Number	Lamp		V	Power Supply	Input Watts	PF
				No	Type				
	A1 3"x4' recessed linear fluorescent luminaire with extruded aluminum finish and frosted acrylic flush lens.	Focal Point	FAVB-FL-1T5-1C-277-S-F-WH-4'	1	F28W/T5/841/ECO 4100 85 MIN CRI	277	GE T5 HE Ballast 99655- GE228MVPPS-A	36	.95
	B1 24' x 8' ceiling mounted decorative indirect halogen over-bar fixture with polished chrome finish.	Artemide	Mercury Cluster	8	Q150T3/CI/CD 2950K 85 MIN CRI	277	-	1200	1.0
	C1 4" square 4100K LED downlight with remote phosphor lens, color mixing chamber, and integrated heat sink and power supply.	Indy	SDSQ4-20-40-WTSF	-	LED 4100K 85 MIN CRI	277	Integral universal LED driver	33	.9
	C2 8" square surface mounted 4000K Energy Star qualified LED downlight with aluminum housing, 2" square luminous area and 65° beam spread.	Color Kinetics	523-000011-02	-	LED 523-000009-07 4000K 85 MIN CRI	277	integrated 277 VAC 523-000010-01	15	.95
	C3 2" low voltage halogen adjustable directional flush mount pinhole downlight with 40° beam spread.	Kurt Versen	K7401FM-ET2	1	Q50WMR16/C/FL/4 0 3050K 92 MIN CRI	12	Integral electronic transformer 277V to 12V	50	1.0
	D1 Linear fluorescent high performance perimeter open wall wash fixture with extruded aluminum finish and reflector.	Focal Point	FW4-NS-1T8-1C-277-D-RC	1	F28W/T5/841/ECO 3000 85 MIN CRI	277	GE T5 HE Ballast 99655- GE228MVPPS-A	36	.95
	F1 Low voltage halogen cable light system with adjustable ring mounting, integral louver, and satin aluminum finish.	Tech Lighting	700KHELLO	1	Q35MR16/C/FL40 3000K 92 MIN CRI	12	Tech Lighting Integral electronic transformer	35	1.0
	J1 Flexible RGB LED color tape with RGB LEDs integrated into each LED package mounted on self-adhesive tape. See figure below for mounting details.	Osram	L41LFE/24V/RGB2/B7/13FT	-	LED RGB	24	Nextek Power Systems Model 1600-C2-24VALT	3W/ ft	.95
	J2A 2x2 3form Chroma® square suspended custom LED luminaire with HF ² Narrow Stick LEDs and aluminum housing. Color: chroma white out.	Osram/ 3form	L4LRE/24V/840/NS /24IN	132	LED 4000K 85 MIN CRI	277	Osram Optotronic LED Driver OT25/120-277/12	10.6	.95
	J2B 2x2 3form Chroma® square suspended custom LED luminaire with HF ² Narrow Stick LEDs and aluminum housing. Color: chroma surf.	Osram/ 3form	L4LRE/24V/840/NS /24IN	132	LED 4000K 85 MIN CRI	277	Osram Optotronic LED Driver OT25/120-277/12	10.6	.95

	J2C	2x2 3form Chroma® square suspended custom LED luminaire with HF2 Narrow Stick LEDs and aluminum housing. Color: chroma cobalt.	Osram/ 3form	L4LRE/24V/840/NS /24IN	132	LED 4000K 85 MIN CRI	277	Osram Optotronic LED Driver OT25/120-277/12	10.6	.95
	J3	.75" linear surface mounted LED accent fixture with aluminum housing and 45° beam spread.	Cooper io	0/03/3KM0/45/100/1/02/277	-	10 LED 3000K 85 MIN CRI	277	LED-277A-0700C-28-F-O	5.3W/ft	0.9
	J4	1.3" linear LED cove fixture with 130° beam spread, extruded aluminum body and nylon mount clip.	Winona	WCV-204-1FT-130-30K-DM24V	-	Nichia 123B LED 3000K	277	LED-277A-0700C-28-F-O	4.5W/ft	0.9
	M1	13.7' indirect pole-top ceramic metal halide luminaire with square top reflector and asymmetrical distribution	Bega	8230	1	CMH70/TD/UVC/942/ RX7s 4200 88 CRI	277	GEMH70-SLF-MV	77	.97
	M2	Aluminum alloy bollard fixture with 180° distribution with crystal glass optical lens	Bega	8847	1	F26TBX/841/A/ECO 4100 82 MIN CRI	277	GE Electronic Ballast 75948 – GEC140MAX-A	34	.95
	N1	Recessed LED step luminaire with aluminum housing and white safety glass	Bega	2235	1	F13DBX/841/ECO 4100 82 MIN CRI	277	GE ProLine CFL 71428-GEC213	16	1.0
	N2	4' linear fluorescent wet location listed surface mounted steplight with aluminum housing and white safety glass	Bega	2006	1	F28W/T5/841/ECO 4100 85 MIN CRI	277	GE T5 HE Ballast 99655-GE228MVPPS-A	36	.95
	N3	4000K Linear LED cove mounted strip fixture with 110° beam spread	Winona	WSL-103W-48-110-40K-ND24V-A-NAA	-	LED 4000K	277	LED-INTA-0024V-28-F-O	67	1.0
	N4	Ceramic metal halide exterior wall washing luminaire with two-sided light output and 10' mounting height	Bega	6602	1	CMH35/T/UVC/U/G12 4200 88 CRI	277	BLS/E/35W/CMH/R	43	1.0
	P4-16	3" wide direct/indirect continuous linear fluorescent luminaire with titanium silver finish, flush satin lens and integrated daylighting sensor. Luminaire length indicated in type and on drawings (I.E. P4 = 4'-0" long).	Focal Point	FAVDS-FL-1A1T5-1C-277-D-C24-WY1-TS-WYSR	2	F28W/T5/841/ECO 4100 85 MIN CRI	277	Philips Advance IDA-2S28-D@277V	63	.98
	S1	2'x2' tubular fluorescent suspended fixture with textile lensing for symmetrical distribution, PVC base and steel housing.	DeltaLight	Jeti Plano 271-54-160	1	55W/840 C-T5 4100 85 MIN CRI	277	Philips Advance IZT-3S32-SC@277V	108	.99
	Z1	4" metal halide floodlight with aluminum housing and clear safety glass	Bega	7502	-	LED 4000K	277	Integral power supply	17	0.99

fixture type: A1

Armstrong® Tech Zone®
avenue® 6



features


Avenue® 6 is Armstrong® TechZone® compatible and also functions with other specialty 6" ceiling systems.

1 and 2 lamp energy efficient fluorescent T5/T5HO or T8.

Shielding options include corrugated or solid regressed trim, flush lens or parabolic louver.

Avenue® 6 provides an integrated lighting solution that compliments the ceiling and entire space while providing comfortable general illumination.

shielding options



solid regress trim flush lens parabolic louver



microglow™ lens


companion luminaire




mr16 suspended twelve with MicroGlow™

dimensional data


grid mount



drywall flange

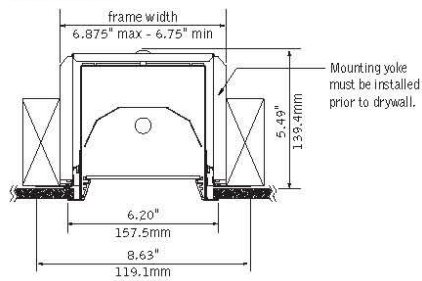


lamping/shielding options



performance

1-Lamp T5HO
67% Efficiency
1392 cd @ 125°




Visit focalpointlights.com for complete photometric data.

december 2010 E

fixture:
project:

mounting information

grid

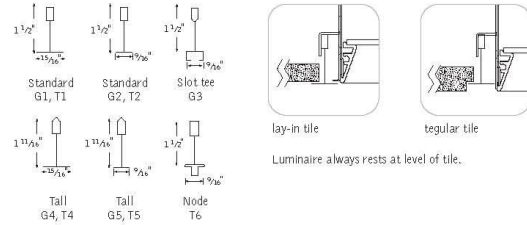

drywall

4' unit (cutout dimension: 5.625" x 47.6")
5' unit (cutout dimension: 5.625" x 59.6")

specifications

construction

One-piece 20 Ga. steel housing
Corrugated and solid regress trim constructed of 6063-T5 extruded aluminum finished in Matte Satin White.
20 Ga. steel, universal flange rail finished in Matte Satin White.
Earthquake brackets supplied as standard.

4' unit weight: 15 lbs.
5' unit weight: 22 lbs.

optic

22 Ga. steel reflectors finished in High Reflectance White powder coat.
Acrylic lens diffuser .118" thick, frosted clear.
Parabolic louver: .75" H x 1.5" frequency fabricated of low iridescent, semi-specular premium grade aluminum.
Louvers can be specified with matte white finish.

electrical

Luminaires are individually wired for specified circuits.
Thru-wiring not available.
Electronic ballasts are thermally protected and have a Class "P" rating.
Consult factory for dimming specifications and availability.
UL and cUL listed.

finish

Polyester powder coat applied over a 5-stage pre-treatment.

ordering

luminaire series	FAV6
Avenue 6	FAV6
shielding	
Corrugated Regressed Trim Frst.Lns	CR
Solid Regressed Trim Frosted Lens	SR
Flush Frosted Lens	FL
Parabolic Louver (T5/T5H0 only)	PL
White Painted Parabolic Louver (T5/T5H0 only)	PW
Corrugated Regressed Trim with MicroGlow™	CRM Lens
Solid Regressed Trim with MicroGlow™	SRM Lens
Flush MicroGlow™ Lens	FLM
lampping	
One Lamp T5	1T5
One Lamp T5H0	1T5H0
One Lamp T8	1T8
Two Lamp T5	2T5
Two Lamp T5H0	2T5H0
Two Lamp T8	2T8
circuits	
Single Circuit	1C
Dual Circuit	2C
voltage	
120 Volt	120
277 Volt	277
347 Volt	347
ballast	
Electronic Program Start <10% THD	S
Electronic Dimming Ballast*	D
ceiling configurations (Avenue® 6 is Armstrong® TechZone® compatible and also functions with other specialty ceiling systems. For other ceiling systems consult factory)	
Drywall Flange	F
Std. 15/16" Lay-in	G1
Std. 15/16" Tegular	T1
Std. 9/16" Lay-in	G2
Std. 9/16" Tegular	T2
9/16" Slot-tee Tegular	G3
Tall 15/16" Lay-in	G4
Tall 15/16" Tegular	T4
Tall 9/16" Lay-in	G5
Tall 9/16" Tegular	T5
Node 9/16" Tegular	T6
factory options	
Chicago Plenum	CP
Emergency Battery Pack* (4' Luminaires Only)	EM
HLR/GLR Fuse	FU
Include 3000K Lamp*	L830
Include 3500K Lamp*	L835
Include 4100K Lamp*	L841
Lutron™ Sensor Feed* (Eco System ballast required) (Consult factory for Occupancy & Daylight Sensor availability)	SF
finish	WH
Matte White Housing & Trim Plate	WH
luminaire length	
4' Nominal Housing	4'
5' Nominal Housing (Dimming not available with 5' lamps) (For continuous row mount, in drywall ceiling, T5/T5H0 only, specify luminaire run length, ie 24".)	5'

Focal Point LLC | 4141 S. Pulaski Rd, Chicago, IL 60632 | T: 773.247.9494 | F: 773.247.9484 | info@focalpointlights.com | www.focalpointlights.com. Focal Point, LLC reserves the right to change specifications for product improvement without notification.



* for more information see Reference section.


recessed

avenue® 6



Filename: FAV6SR1T5H.IES
 Catalog #: FAV6-SR-1.T5HO-1C-120-S-G1-WH-4'
 Efficiency: 67%
 Test #: 13928.0

CANDLEPOWER DISTRIBUTION

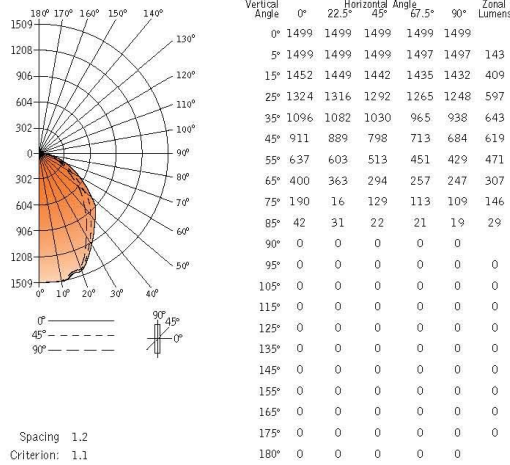

LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt
0°-30°	1149	23.0	34.2
0°-40°	1792	35.8	53.3
0°-60°	2882	57.6	84.7
0°-90°	3364	67.3	100
Total Luminaire	0°-180° 3364	67.3	100

LUMINANCE DATA (CD/M²)

Vertical Angle	0°	45°	90°
45°	8876	7775	6665
55°	7652	6162	5153
65°	6521	4793	4027
75°	5058	3434	2902
85°	3320	1739	1502

CO-EFFICIENTS OF UTILIZATION

Floor	80	70	20	30	10	00
Ceiling	80	70	20	30	10	00
Wall	70 50 30 10	70 50 10	50 10	50 10	50 10	00
RCR 0	80 80 80 80	78 78 78	75 75	72 72	69 69	67
1	75 72 69 67	73 70 66	68 64	65 62	63 60	59
2	69 61 60 57	67 63 56	61 55	59 54	57 53	51
3	64 58 53 49	62 58 49	55 48	53 47	51 46	45
4	59 52 47 43	57 51 42	49 42	48 41	46 41	39
5	54 46 41 37	53 46 37	44 36	46 36	42 35	34
6	50 42 36 32	49 41 32	40 32	39 32	38 31	30
7	46 38 32 29	45 37 28	36 28	35 28	34 28	27
8	43 34 29 25	42 34 25	33 25	32 25	31 24	23
9	39 31 25 22	39 30 22	30 22	29 22	28 21	20
10	37 28 23 19	36 28 19	27 19	26 19	26 19	18

Numbers indicate percentage values of


Go to www.focalpointlights.com for additional photometric data.

avenue® 6



Filename: FAV6FL1T5H.IES
 Catalog #: FAV6-FL-1.T5HO-1C-120-G1-WH-4'
 Efficiency: 67%
 Test #: 13929.0

CANDLEPOWER DISTRIBUTION

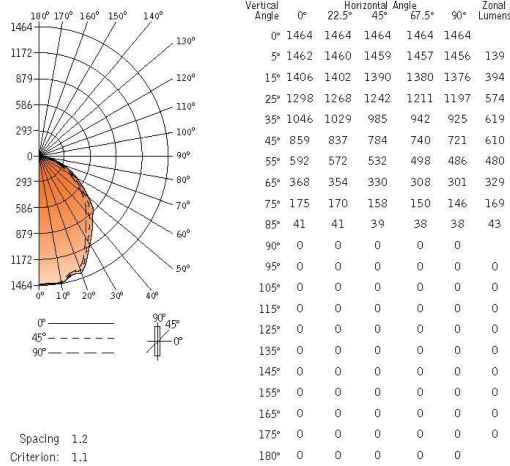

LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixt
0°-30°	1107	22.1	330
0°-40°	1726	34.5	51.4
0°-60°	2817	56.3	83.9
0°-90°	3358	67.2	100
Total Luminaire	0°-180° 3358	67.2	100

LUMINANCE DATA (CD/M²)

Vertical Angle	0°	45°	90°
45°	8370	7639	7025
55°	7111	6390	5838
65°	5999	5380	4907
75°	4658	4206	3886
85°	3241	3083	3004

CO-EFFICIENTS OF UTILIZATION

Floor	80	70	20	30	10	00
Ceiling	80	70	20	30	10	00
Wall	70 50 30 10	70 50 10	50 10	50 10	50 10	00
RCR 0	80 80 80 80	78 78 78	75 75	74 74	69 69	67
1	74 71 69 67	72 70 66	67 64	65 62	62 60	58
2	68 64 60 56	67 62 56	60 54	58 53	56 52	51
3	63 57 50 48	62 56 48	54 47	52 46	51 45	44
4	58 51 46 42	57 50 41	49 41	47 40	46 40	38
5	53 46 40 36	52 45 36	43 35	42 35	41 35	33
6	49 41 35 31	48 40 31	39 31	35 31	37 31	29
7	46 37 32 28	45 37 28	36 27	35 27	34 27	26
8	42 33 28 4	41 33 24	32 24	31 24	30 24	22
9	39 30 25 21	38 30 21	29 21	28 21	28 21	20
10	36 27 22 19	35 27 19	26 19	26 19	25 18	17

Numbers indicate percentage values of

Go to www.focalpointlights.com for additional photometric data.

fixture type: B1


Artemide Mercury Cluster

Ross Lovegrove 2009

A series of pebbles form a cluster reflecting the light that bounces on its biomorphic surfaces. Mercury Cluster is a sectional unit that enables numerous elements to be added.

Cable suspended or ceiling mounted luminaire for indirect halogen lighting. Custom configurations available.

- illuminated reflective units (pebbles) made of molded thermoplastic with polished chrome finish
- unilluminated reflective units (pebbles) in die cast aluminum polished chrome finish
- disc in die cast aluminum in pale grey finish
- grey thermoplastic canopy with clear electrical cord and stainless steel cables
- mounting directly to rigid ceiling surface (hardware by others) over standard electrical junction boxes

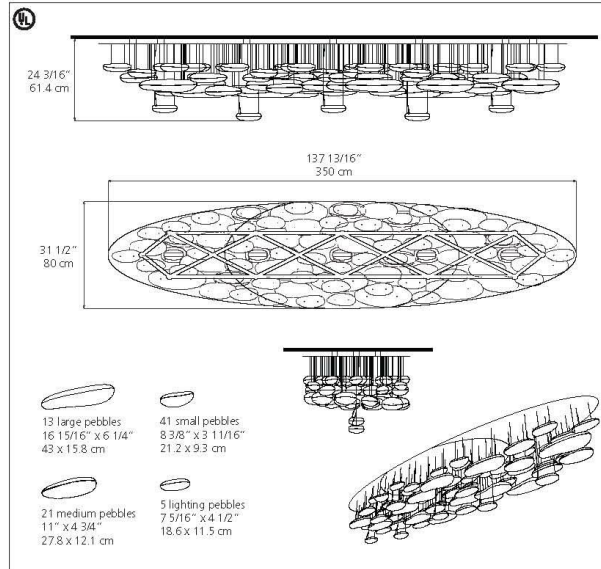

Mercury Cluster suspension

halogen source

- 5 x 200W (R7S/T3) supplied.....



www.artemide.us



K13.1.4

ENVIRONMENTALLY FRIENDLY, ENERGY EFFICIENT

- Comparable light output to 26W and 42W CFL while consuming 18 and 34 watts.
- No harmful ultraviolet or infrared wavelengths
- No lead or mercury



PRODUCT SPECIFICATIONS

Optics

Trim: Self-flanged, clear Alzak® (SASF) trim • Alzak® trim with low iridescent finish is standard • Others Alzak finishes are available; see trim options
 • Computer-optimized reflector maximizes fixture efficiency
 • Deep regression of source produces a very low glare system • Lensed mixing chamber conceals the LEDs to produce uniform aperture luminance

Electrical

LED Light Engine: Innovative light engine utilizes remote phosphor lens and mixing chamber to ensure perfectly mixed light, resulting in uniform colors and superior color consistency from fixture to fixture • 3000K, 3500K and 4100K color temperatures available • CRI>80 • Cast aluminum heat sink integrated directly with housing provides superior thermal management with LEDs operating below manufacturer's published junction temperature to ensure attainment of rated life of the LEDs • Light engine mounts directly to heat sink and is easily replaceable

Dimming: Dimmable via 0-10V protocol, increasing efficiency up to 30% while dimming • For a list of compatible dimmers, see [LED DIM.](#)

LED Driver: Universal driver accommodates 120V to 277V input volts AC at 50/60Hz • Consult factory for 347V • Power factor >0.9 • Easily replaceable from above or below the ceiling.

Life: Rated for 50,000 hours at 70% lumen maintenance

Mechanical

Housing: Heavy gauge cold rolled steel with black finish • Universal housing design installs in suspended grid, plaster or drywall • Integral cast aluminum heat sink conducts heat away from LED light engine • Light engine and driver are accessible from above and below ceiling and can be upgraded to accommodate future technology improvements.

Mounting Frame: Heavy gauge steel lower housing ring with factory installed spring steel friction clips securely holds cones in ceiling

• Accommodates ceilings up to 3/4" thick • For thicker ceilings; consult factory
Mounting Bracket: Mounting brackets have 3" vertical adjustment and accept 1-1/2" C-channel mounting bars • Indy TRU-LOCK bar hangers are supplied standard • For non-accessible ceiling add suffix "825" for 28" "C" channel mounting bars • One-piece Tru-Lock bar hangers have integral T-bar locking screws and alignment notches for locating and locking fixture in the center or 1/4" tile increments

Junction Box: Junction box rated for eight No. 12 AWG 90° C branch circuit conductors (4-in, 4-out)

Labels and Listings

- UL listed for feed through and damp locations • I.B.E.W. Union made
- Energy Star qualified when used with select trims
- Wet location listing available by adding "WL" option
- UL and cUL, RoHS compliant • EMI complies with FCC 47, Part 15, Class A

Warranty: 5 years when used in accordance with manufacturing guidelines.


Product specifications subject to change without notice.

DESIGNER SERIES
4" 1100/2000 LUMEN LED
SQUARE DOWNLIGHT
 OPEN APERTURE
SDSQ4 SERIES



Type	Cat. No.
_____	_____
Project:	_____
Notes:	_____

DIMENSIONS

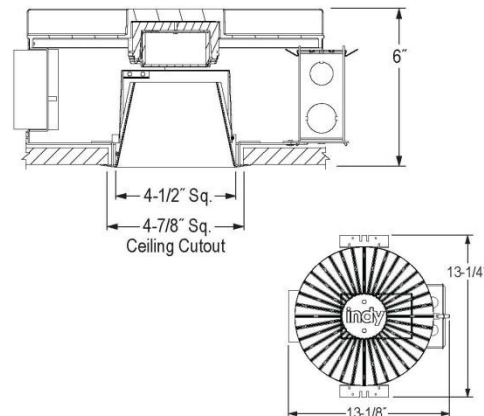

ENGINEERING DATA

	120V		277V	
	1100	2000	1100	2000
Fixture Lumens	1100	2000	1100	2000
CCT	41K/35K/3K	41K/35K/3K	41K/35K/3K	41K/35K/3K
Input Current	0.15	0.34	0.08	0.15
Input Wattage	17W/18W/19W	33W/34W/36W	17W/18W/19W	33W/34W/36W
Input Frequency	50/60Hz	50/60Hz	50/60Hz	50/60Hz
Power Factor	0.9	0.9	0.9	0.9

347 Volt available, consult factory.

ORDERING INFORMATION: Rough-in, reflector and accessories each ordered separately.

Example: **SDSQ4-2035-SASF2-PF**

Cat. #	Light Engine Lumens	Color Temp.	Trim Options	Generation	Options
SDSQ4				2	
SDSQ4	11 1100 Lumens	30 3000K	Alzak® Finish Options:		PF Painted Flange Only (White)
	20 2000 Lumens	35 3500K	Clear		F Fuse and Fuse Holder
		40 4100K	Satin		BP 120/277V Emergency Battery Pack with Remote Test Switch
			▲SASF		†347 347 Volt
			Champagne Gold		†CP Chicago Plenum
			Black		825 28" "C" Channel Mounting Bars, Pair
			Pewter		WL Wet Location (Clear glass lens standard)
			Wheat		
			Bronze		
			Painted Finish Options		
			White		

† Consult Factory for Availability

▲ Energy Star qualified for use with any Lumen/Color Temperature combination.

2/11 Rev.6




1300 South Wolf Road • Des Plaines, Illinois 60018
 PHONE 800-367-5866 • FAX 888-708-6578
www.junolightinggroup.com

K13.1.4

3000K, 3500K & 4100K CCT
 Catalog Number: **SDSQ4-2030-SAF2**
 PHOTOMETRIC REPORT
 Test Number: LTL19128
 Total Lumen Output: 1362 Lumens
 Luminaire Efficacy: 41 lm/w (4100K), 40 lm/w (3500K)
 38 lm/w (3000K)
 Luminaire Spacing Criteria: 1.04
 Luminaire: Clear specular Alzak® reflector. Open bottom.
 CIE-Type: Direct

Distance to Illuminated Plane (feet)	Footcandle Beam Center	Footcandle Beam Edge	Beam Diameter
6'	22.4	10.1	7.5'
7'	23.8	7.4	8.8'
8'	18.2	5.7	10.0'
9'	14.4	4.5	11.3'
10'	11.7	3.6	12.5'
11'	9.6	3.0	13.8'
12'	8.1	2.5	15.1'
13'	6.9	2.1	16.3'
14'	5.9	1.8	17.6'
15'	5.2	1.6	18.8'



Angle in Degrees	Candela/M ²
45°	14529
55°	3437
65°	1091
75°	354
85°	192

Zone	Lumens%	%Fixture
0-30°	900	66.1
0-40°	1221	89.7
0-60°	1354	99.4
0-90°	1362	100.0
90-180°	0	0.0
0-180°	1362	100.0

AVERAGE INITIAL FOOTCANDLES

Reflectances: 80% Ceiling, 50% Walls, 30% Floors

Luminaire Spacing	Room Cavity Ratio		
	RCR1	RCR4	RCR8
5' x 5'	60	48	37
6' x 6'	42	33	25
7' x 7'	31	24	19
8' x 8'	23	19	14
9' x 9'	18	15	11
10' x 10'	15	12	9
11' x 11'	12	10	8
12' x 12'	10	8	6


COEFFICIENTS OF UTILIZATION - % (Zonal Cavity Method)

Effective Floor Reflectance 20%

PCC	80			70			50			30			10			0
PW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	0	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	100	
1	113	110	108	105	111	108	106	104	104	102	101	100	99	98	97	
2	107	102	98	94	105	100	97	93	97	94	91	94	92	89	87	
3	102	95	90	85	100	93	89	85	91	87	83	88	85	82	80	
4	96	88	82	78	94	87	82	77	85	80	77	83	79	76	75	
5	91	82	76	71	89	81	75	71	79	74	70	78	73	70	69	
6	86	77	70	66	84	76	70	66	74	69	65	73	68	65	64	
7	81	72	65	61	80	71	65	61	70	64	60	68	64	60	58	
8	77	67	61	57	76	67	61	56	65	60	56	64	60	56	54	
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	51	
10	70	59	53	49	68	59	53	49	58	53	49	57	52	49	47	

3000K, 3500K & 4100K CCT
 Catalog Number: **SDSQ4-2030-SASF2**
 PHOTOMETRIC REPORT
 Test Number: LTL19129
 Total Lumen Output: 1293 Lumens
 Luminaire Efficacy: 39 lm/w (4100K), 38 lm/w (3500K)
 38 lm/w (3000K)
 Luminaire Spacing Criteria: 1.02
 Luminaire: Clear satin Alzak® reflector. Open bottom.
 CIE-Type: Direct

Distance to Illuminated Plane (feet)	Footcandle Beam Center	Footcandle Beam Edge	Beam Diameter
6'	30.4	9.2	7.6'
7'	22.3	6.7	8.9'
8'	17.1	5.2	10.1'
9'	13.5	4.1	11.4'
10'	10.9	3.3	12.6'
11'	9.0	2.7	13.9'
12'	7.6	2.3	15.2'
13'	6.5	2.0	16.4'
14'	5.6	1.7	17.7'
15'	4.9	1.5	19.0'



Angle in Degrees	Candela/M ²
45°	17359
55°	6488
65°	2005
75°	619
85°	394

Zone	Lumens%	%Fixture
0-30°	804	62.2
0-40°	1107	85.6
0-60°	1277	98.8
0-90°	1293	100.0
90-180°	0	0.0
0-180°	1293	100.0

AVERAGE INITIAL FOOTCANDLES

Reflectances: 80% Ceiling, 50% Walls, 30% Floors

Luminaire Spacing	Room Cavity Ratio		
	RCR1	RCR4	RCR8
5' x 5'	57	45	34
6' x 6'	40	31	23
7' x 7'	29	23	17
8' x 8'	22	18	13
9' x 9'	18	14	10
10' x 10'	14	11	8
11' x 11'	12	9	7
12' x 12'	10	8	6


COEFFICIENTS OF UTILIZATION - % (Zonal Cavity Method)

Effective Floor Reflectance 20%

PCC	80			70			50			30			10			0
PW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	0	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	100	
1	113	110	107	105	110	108	105	103	104	102	100	100	99	97	95	
2	107	102	97	93	105	100	96	92	96	93	90	93	91	88	87	
3	101	94	88	84	99	92	87	83	90	86	82	87	84	81	80	
4	95	87	81	76	93	86	80	76	83	79	75	81	77	74	73	
5	90	81	74	70	88	80	74	69	78	73	69	76	72	68	67	
6	85	75	69	64	83	74	68	64	73	67	63	71	66	63	61	
7	80	70	64	59	79	69	63	59	68	62	58	67	62	58	56	
8	76	65	59	55	74	65	59	54	64	58	54	63	58	54	52	
9	72	61	55	51	71	61	55	51	60	54	50	59	54	50	49	
10	68	58	51	47	67	57	51	47	56	51	47	56	51	47	45	

3000K, 3500K & 4100K CCT
 Catalog Number: **SDSQ4-1130-SAF2**
 PHOTOMETRIC REPORT
 Test Number: LTL15471
 Total Lumen Output: 764 Lumens
 Luminaire Efficacy: 45 lm/w (4100K), 42 lm/w (3500K)
 40 lm/w (3000K)
 Luminaire Spacing Criteria: 1.0
 Luminaire: Clear specular Alzak® reflector. Open bottom.
 CIE-Type: Direct

Distance to Illuminated Plane (feet)	Footcandle Beam Center	Footcandle Beam Edge	Beam Diameter
6'	17.1	5.6	7.5'
7'	12.6	4.1	8.8'
8'	9.6	3.2	10.1'
9'	7.6	2.5	11.3'
10'	6.2	2.0	12.6'
11'	5.1	1.7	13.8'
12'	4.3	1.4	15.1'
13'	3.7	1.2	16.3'
14'	3.1	1.0	17.6'
15'	2.7	0.9	18.8'



Angle in Degrees	Footlamberts	Candela/M ²
45°	1892	6483
55°	297	1019
65°	79	271
75°	58	199
85°	0	0

Zone	Lumens%	%Fixture
0-30°	508	66.5
0-40°	694	90.7
0-60°	761	99.6
0-90°	764	100.0
90-180°	0	0.0
0-180°	764	100.0

AVERAGE INITIAL FOOTCANDLES

Reflectances: 80% Ceiling, 50% Walls, 30% Floors

Luminaire Spacing	Room Cavity Ratio		
	RCR1	RCR4	RCR8
5' x 5'	31	24	18
6' x 6'	21	17	13
7' x 7'	16	12	9
8' x 8'	12	9	7
9' x 9'	9	7	6
10' x 10'	8	6	5
11' x 11'	6	5	4
12' x 12'	5	4	3

COEFFICIENTS OF UTILIZATION - % (Zonal Cavity Method)

Effective Floor Reflectance 20%


PCC	80			70			50			30			10			0
PW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	0	
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	100	
1	113	110	108	106	111	108	106	104	104	102	101	101	99	98	97	
2	107	102	98	95	105	101	97	94	97	94	92	94	92	90	88	
3	102	95	90	86	100	94	89	85	91	87	84	89	85	82	80	
4	96	88	83	78	94	87	82	78	85	80	77	83	79	76	75	
5	91	82	76	72	89	81	76	71	80	75	71	78	74	70	68	
6	86	77	71	66	85	76	70	66	75	69	65	73	68	65	63	
7	82	72	66	61	80	71	65	61	70	65	61	69	64	60	59	
8	77	67	61	57	76	67	61	57	66	60	56	65	60	56	55	
9	73	63	57	53	72	63	57	53	62	56	52	61	56	52	51	
10	70	60	53	49	69	59	53	49	58	53	49	57	52	49	48	

Fixtures tested to IES recommended standard for solid state lighting per LM-79-08. Photometric performance on a single unit represents a baseline of performance for the fixture. Results may vary in the field.



1300 S. Wolf Road • Des Plaines, IL 60018 • Phone (800) 367-5866 • Fax (888) 708-6578
 Visit us at www.junolightinggroup.com

Printed in U.S.A. ©2010 Juno Lighting, LLC.



Date: _____ Type: _____

Firm Name: _____

Project: _____


eW Downlight Powercore

4000 K

Energy-efficient LED downlight

eW[®] Downlight Powercore is a low-profile, surface-mounted LED downlight for basic white general illumination. This easy-to-install, dimmable fixture uses standard mounting and direct line voltage connection without the need for remote transformers. Suitable for common spaces, elevators, conference rooms, kitchenettes, and interiors in commercial, hospitality, retail, and residential environments, eW Downlight Powercore is especially appropriate where recessed installation is not possible.

- Integrates patented Powercore[®] technology— Powercore technology rapidly, efficiently, and accurately controls power output to eW Downlight Powercore fixtures directly from line voltage, eliminating transformers and other external power supplies.
- Simple, standard installation — Contractor-friendly installation uses standard wiring and mounting to dramatically simplify installation and help lower total system cost.
- High-quality light at substantially lower cost — Provides light level and quality comparable to CFL downlights with no wasted energy, light, or heat. Offers total cost of ownership reduction of up to 58% as compared with CFL downlights.
- ENERGY STAR[®] qualified — As an ENERGY STAR qualified LED luminaire, eW Downlight Powercore uses 80% less energy and can last over 40 times longer than incandescent lighting — up to 85,000 hours of use at 70% lumen maintenance.
- Flexible mounting options — Mounts to a standard junction box or directly to a flat mounting surface where allowed. Slotted through-holes in the mounting plate provide adjustment in surface mount applications. Swivel bracket for 120 and 277 VAC units allows precise adjustment during installation.
- Warm and cool color temperatures — Available in two color temperatures, a warm 2700 K appropriate for intimate, open environments such as restaurants, hotel lobbies, and homes, and a cool 4000 K for lighting clean and efficient spaces such as offices, classrooms, and hospitals.
- Two available beam angles — Available with a 30° beam angle for high ceilings or spotlighting, and a 65° beam angle for floodlighting and low-ceiling environments such as corridors.
- Four available voltages — Power modules of 100 VAC, 120 VAC, 220 – 240 VAC, and 277 VAC are available for consistent installation and operation in multiple locations.
- Unobtrusive, sleek design — Low-profile fixture is ideal for surface mounting and semi-recessed applications. Metal bezel is available in white, black, or brushed aluminum.
- Dimming capability — Patented DIMand[®] technology offers smooth dimming capability with many ELV-type dimmers.

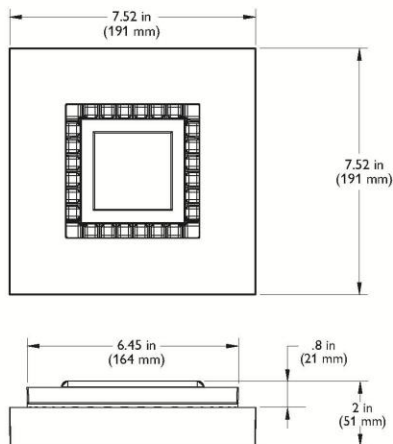

environments such as restaurants, hotel lobbies, and homes, and a cool 4000 K for lighting clean and efficient spaces such as offices, classrooms, and hospitals.

- Two available beam angles — Available with a 30° beam angle for high ceilings or spotlighting, and a 65° beam angle for floodlighting and low-ceiling environments such as corridors.
- Four available voltages — Power modules of 100 VAC, 120 VAC, 220 – 240 VAC, and 277 VAC are available for consistent installation and operation in multiple locations.
- Unobtrusive, sleek design — Low-profile fixture is ideal for surface mounting and semi-recessed applications. Metal bezel is available in white, black, or brushed aluminum.
- Dimming capability — Patented DIMand[®] technology offers smooth dimming capability with many ELV-type dimmers.

For detailed product information, please refer to the eW Downlight Powercore Product Guide at www.colorkinetics.com/ls/essentialwhite/ewdownlight/



PHILIPS

Specifications

Due to continuous improvements and innovations, specifications may change without notice

Item	Specification	4000 K*
Output	Beam Angle	30° FWHM / 65° FWHM ENERGY STAR
	Lumens†	420 (30° beam angle) 525 (65° beam angle)
	Efficacy (lm / W)	28.0 (30° beam angle) 35.0 (65° beam angle)
	CRI	85
	Lumen Maintenance‡	85,000 hours L70 @ 25° C 50,000 hours L70 @ 50° C
Electrical	Input Voltage	100 / 120 / 220 – 240 / 277 VAC, 50 / 60 Hz
	Power Consumption	15 W maximum at full output, steady state
	Power Factor	0.95 @ 120 V
Control	Dimming	Compatible with many commercially available ELV, trailing edge, or reverse-phase control dimmers.§
Physical	Dimensions (Height x Width x Depth)	7.5 x 7.5 x 2 in (191 x 191 x 51 mm)
	Weight	3.1 lb (1.4 kg)
	Housing	Die-cast aluminium chassis and bezel with black, white, or brushed aluminium finish
	Lens	Clear polycarbonate
	Fixture Connections	6 in (152 mm) flying leads (100 / 120 / 277 VAC) Terminal block (220 – 240 VAC)
	Temperature Ranges	-4° – 122° F (-20° – 50° C) Operating -4° – 122° F (-20° – 50° C) Startup -40° – 176° F (-40° – 80° C) Storage
	Humidity	0 – 95%, non-condensing
Certification and Safety	Certification	UL / cUL, FCC Class B for 120 / 277 VAC, CE
	Environment	Dry / Damp Location, IP50
	Energy Efficiency	ENERGY STAR

* Color temperatures conform to nominal CCTs as defined in ANSI Chromaticity Standard C78.377A.

† Lumen measurement complies with IES LM-79-08 testing procedures.

‡ L70 = 70% maintenance of lumen output (when light output drops below 70% of initial output). Ambient temperatures specified.

§ Refer to www.colorkinetics.com/support/appnotes/ for specific details.

Fixtures and Accessories

Item	Type	Item Number	Philips 12NC
Power Modules	100 VAC	523-000010-02	910503700235
	120 VAC	523-000010-00	910503700233
	220 – 240 VAC	523-000010-03	910503700236
	277 VAC	523-000010-01	910503700234
Lamp Modules 100 / 120 / 277 VAC	65° beam angle ENERGY STAR	523-000009-07	910503700561
	30° beam angle	523-000009-09	910503700563
Bezel Modules	White	523-000011-00	910503700237
	Black	523-000011-01	910503700238
	Brushed Aluminum	523-000011-02	910503700239
Complete Fixture Kit 220 – 240 VAC only	White 65° beam angle	523-000031-07	910503700347
	White 30° beam angle	523-000031-01	910503700341
	Black 65° beam angle	523-000031-09	910503700349
	Black 30° beam angle	523-000031-03	910503700343
	Brushed Aluminum 65° beam angle	523-000031-11	910503700351
Brushed Aluminum 30° beam angle	523-000031-05	910503700345	

Use Item Number when ordering in North America.




Philips Color Kinetics
3 Burlington Woods Drive
Burlington, Massachusetts 01803 USA
Tel 888.385.5742
Tel 617.423.9999
Fax 617.423.9998
www.philipscolorkinetics.com


Photometrics

4000 K, 30° (narrow) beam angle

Polar Candela Distribution

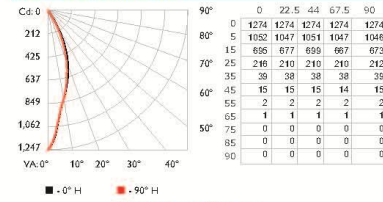

Illuminance at Distance




35.7 ft (10.9 m) 1 fc maximum distance

Lumens	420
Efficacy	28.0 lm / W


For lux multiply fc by 10.7

4000 K, 65° (wide) beam angle

Polar Candela Distribution

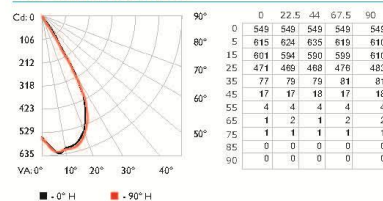


Illuminance at Distance



23.4 ft (7.1 m) 1 fc maximum distance

Lumens	525
Efficacy	35.0 lm / W

Copyright © 2009 – 2010 Philips Solid-State Lighting Solutions, Inc. All rights reserved. Chromacore, Chromatic, CK, the CK logo, Color Kinetics, the Color Kinetics logo, ColorBlast, ColorBlaze, ColorBurst, ColorGaze, ColorPlay, ColorReach, iW Reach, eW Reach, eW Fuse, DIMand, EssentialWhite, eVJ, iColor, iColor Cove, IntelliWhite, iW, iPlayer, Optibin, and Powercore are either registered trademarks or trademarks of Philips Solid-State Lighting Solutions, Inc. in the United States and / or other countries. All other brand or product names are trademarks or registered trademarks of their respective owners. Due to continuous improvements and innovations, specifications may change without notice. DAS-000011-02 R04 12-10

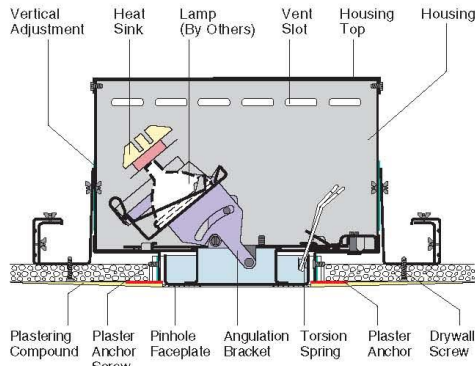

K7401FM

Flush Mount Directional Pinhole
MR-16 Lamps to 75W
2" Pinhole Aperture

FM
2-1

Flush Mount

Kurt Versen's flush mount fixtures eliminate overlapping edges and lock into the ceiling for a unique, finished appearance. A clean, uncluttered ceiling emphasizes the attention to detail, enhancing the impact of the interior environment. It is a factory installed option with a proven installation technique.

Optics and Applications

A variety of beam patterns is available. Use when MR-16 lamps are specified and a pinhole aperture is preferred.

Design Features

The lamp rotates 360°, tilts 40° and locks into position. A proprietary lampholder features a ceramic socket, aluminum heat sink and reflective heat shield. It accepts two accessories and tilts for relamping while maintaining its aiming position. Stainless steel springs retain the lamp. Flush mount design resists cracking and chipping by mechanically fastening fixture to drywall. To simplify installation, three adjustment mechanisms adapt the fixture to ceiling conditions. Adjustable mounting rails fit different support systems and accommodate ceilings from 3/8" to 7/8" thick. Maximum extension is 26". Top or bottom service.

Finish

The faceplate is standard matte white enamel. Housing and structural parts are optical matte black.

Transformer

Each fixture has a magnetic transformer for MR-16 lamps up to 75W. The primary lead is 120V with a 12V secondary. The transformer is rated 180°C Class H with a built-in 150°C thermal reset. It is accessible through the aperture. Maximum fixture draw is 85W.

General

Fixture is pre-wired and thermally protected, UL and C-UL listed for damp location and eight wire 75°C branch circuit wiring. Union made IBEW.

Accessories

- HL Hexcell louver.
- LL Linear spread lens.
- LP Large prism lens.
- MP Microprism lens.
- DP Fixed downlight position.
- UV Ultraviolet filter.
- OV Oval aperture faceplate.
- SA Satin aluminum faceplate.
- BAK Brushed aluminum faceplate.
- V277 277 volt primary magnetic transformer.
- FR Frosted lens. Example: LLFR for linear lens frosted.
- CC Custom color faceplate, contact factory.
- WRL Wattage restriction label, specify wattage.
- FMW Flush mount wood, contact the factory.
- PA1 1 1/4" pinhole aperture faceplate.
- ET1 Electronic transformer 120V to 12V.
- ET2 Electronic transformer 277V to 12V.



Dimensions and Lamps

Number	A Depth	B Aperture	C Width	D Length	Lamps
K7401FM	6 1/8" 156mm	2" 50mm	15" 381mm	14 1/4" 362mm	20-75W MR-16 Low voltage



FM 2-1 K7401FM


Footcandle Values

Distance	5'			10'			15'			20'											
	Nadir	5°	10°	Nadir	5°	10°	Nadir	5°	10°	Nadir	5°	10°									
MR-16 Lamps	CBCP	FC	FC Diam	FC Diam	FC	FC Diam	FC Diam	FC	FC Diam	FC Diam	FC	FC Diam	FC Diam								
35W NSP/8/FRB 8°	11000	333	193	1'	8	2'	83	48	2'	2	4'	37	21	3'	1	5'	21	12	3'	1	7'
50W NSP/15/EXT 14°	10200	235	165	1'	61	2'	59	41	2'	15	4'	26	18	3'	7	5'	15	10	3'	4	7'
65W NSP/10/FPA 10°	14000	408	241	1'	12	2'	102	60	2'	3	4'	45	27	3'	1	5'	26	15	3'	1	7'
75W NSP/15/EYF 14°	12000	315	204	1'	17	2'	79	51	2'	4	4'	35	23	3'	2	5'	20	13	3'	1	7'


Distance	5'			10'			15'			20'											
	Nadir	10°	15°	Nadir	10°	15°	Nadir	10°	15°	Nadir	10°	15°									
MR-16 Lamps	CBCP	FC	FC Diam	FC Diam	FC	FC Diam	FC Diam	FC	FC Diam	FC Diam	FC	FC Diam	FC Diam								
35W FL35/FMW 35°	1400	39	39	2'	24	3'	10	10	4'	6	5'	4	4	5'	3	8'	2	2	7'	1	11'
50W FL40/EXN 40°	2000	67	66	2'	36	3'	17	17	4'	9	5'	7	7	5'	4	8'	4	4	7'	2	11'
65W FL40/FPB 40°	2100	67	64	2'	19	3'	17	16	4'	5	5'	7	7	5'	2	8'	4	4	7'	1	11'
75W NFL25/EYJ 25°	4900	154	102	2'	22	3'	39	25	4'	5	5'	17	11	5'	2	8'	10	6	7'	1	11'

See note 2.


Candelpower Distribution




K7401FM 50W MR-16 NSP/15/EXT 14° Eff. 50% S/M 25



K7401FM 50W MR-16 NFL/25/EXZ 27° Eff. 37% S/M 27



K7401FM 75W MR-16 NSP/15/EYF 14° Eff. 85% S/M 23



K7401FM 75W MR-16 NFL/25/EYJ 25° Eff. 54% S/M 40

Candelas

	EXT	EXZ
o	10200*	3400*
0	5863	3476
5	4164	2575
10	1593	1236
15	379	404
20	17	41
25	4	3
30	0	0
35	0	0
40	0	0
45	0	0
50	0	0
55	0	0
60	0	0
65	0	0
70	0	0
75	0	0
80	0	0
85	0	0
90	0	0

°Vertical Angles
*Center Beam
Candelpower

	EYF	EYJ
o	12000*	4900*
0	7869	3854
5	5150	3983
10	1786	2660
15	361	608
20	193	42
25	6	7
30	0	0
35	0	0
40	0	0
45	0	0
50	0	0
55	0	0
60	0	0
65	0	0
70	0	0
75	0	0
80	0	0
85	0	0
90	0	0

°Vertical Angles
*Center Beam
Candelpower

Notes


- 1 Candelpower distribution curves: the solid lines show horizontal distribution at nadir, the dotted lines show horizontal distribution at 25° lamp tilt.
- 2 Pattern diameters are determined from each side of nadir with 0° lamp tilt. The diameter includes both sides, so a 10° diameter represents a total 20° pattern width at the floor. Footcandles are measured at the diameter edge. Tiling the lamp changes all data.



www.sylvania.com

LINEARlight FLEX® Top Colormix

Flexible Colormixing LED Module

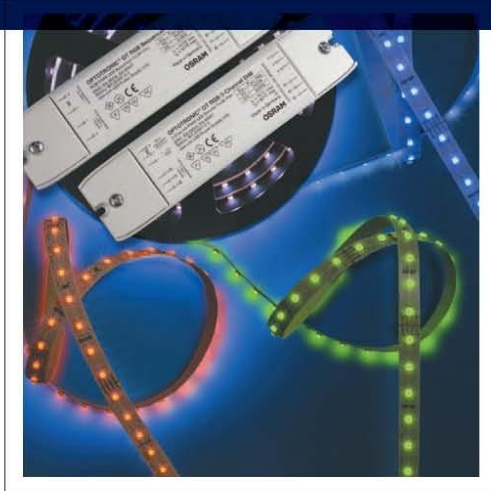

LINEARlight FLEX Top Colormix modules provide dynamic control of colored illumination. Each individual LED contains red, green and blue chips in one LED package. LINEARlight FLEX Top Colormix module is optimally paired with 24Vdc power supplies, OPTOTRONIC® OT RGB 3CH DIM and OT RGB Sequencer dimming controllers to yield an infinite choice of colors, including white. This unique method of colormixing within each LED, achieves better color consistency and uniformity than by combining separate, colored LEDs. The LINEARlight FLEX Top Colormix module is mounted on a flexible self-adhesive tape that can be conveniently field cut with scissors. These dynamic and flexible features enable the systems to be used in a wide range of large scale applications, including edge lighting of transparent and diffusing materials, illuminating facades and coves and architectural applications. These modules can be used wherever high voltage concerns or space limitations prevent use of conventional means of illumination.

Key Features & Benefits

- Flexible circuit board with self-adhesive backing allows for easy installation in complex contours
- Low profile module enables mounting in compact spaces
- Each Multi LED contains an individually powered red, green and blue chip; this unique method of colormixing achieves excellent color consistency and uniformity
- 13 foot module decreases complexity of wiring and programming simplifying installation for long linear runs
- Modules can be field cut to 7.9 inches (20mm) to achieve a customized fit
- LEDs are closely spaced to minimize hot spots in shallow installations
- Dimmable by pulse width modulation, a method that maintains consistent lumen output and color

Product Offering

Ordering Abbreviation	Color
L41LFE/24W/RGB2/B7/13FT	RGB2
L55LFE/24W/RGB/B7/13FT	RGB

Application Information

Applications

- Accent lighting
- Colormixing
- Controlled color sequencing
- Cove lighting
- Custom color applications
- Edge lighting

Specifications and Certifications



The SYLVANIA LINEARlight FLEX Top Colormix module is UL2108 Listed for US and Canada Class 2 Unit. (UL file # E258264)



SEE THE WORLD IN A NEW LIGHT



LED017R9 6/10

Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	Date

Ordering Information

Item Number	Ordering Abbreviation	Module Length	No. of LEDs	Power* (W)	Voltage (Vdc)	Current (Amps)	Wavelength	Initial Lumens	Watts/ft.
70198	L41LFE/24V/RGB2/B7/13FT	13.1 ft.	200	8.5	24	0.35	625nm	385	0.6
				24.0	24	1.0	525nm	770	1.8
				8.5	24	0.35	469nm	130	0.6
70127	L55LFE/24V/RGB/B7/13FT	13.1 ft.	200	12	24	0.5	617nm	213	0.9
				24.0	24	1.0	525nm	336	1.8
				19.2	24	0.8	467nm	54	1.5

*All data is related to entire module measured at Tc point of 25°C. Data reflects statistical mean values. Actual data may differ depending on variances in the manufacturing process. End users need to take into account the lumen depreciation as the temperature rises with various thermal management solutions installed.

Ordering Guide

L	55	L	F	E	/	24V	/	RGB	/	B7	/	13FT
LED	Wattage	Linear	Flexible	Engine		Voltage		Colormix Red, Green, Blue		Style		Length

Power Supply Information

LED Item Number	OT 20W (51512)			OT 50W (51598)			OT 75W (51514)		
	# of parallel branches (max. feet)	Max. feet per branch	Max. SEU's per branch	# of parallel branches (max. feet)	Max. feet per branch	Max. SEU's per branch	# of parallel branches (max. feet)	Max. feet per branch	Max. SEU's per branch
70198	1 (5.9)	5.9	9	2 (15.7)	13.1; 2.6	20; 4	2 (23.6)	13.1; 10.5	20; 16
70127	1 (4.6)	4.6	7	1 (12.4)	11.8	18	2 (17.7)	13.1; 4.6	20; 7

LED Item Number	OT 96W (51510, 51626)			OT 240W (51627)		
	# of parallel branches (max. feet)	Max. feet per branch	Max. SEU's per branch	# of parallel branches (max. feet)	Max. feet per branch	Max. SEU's per branch
70198	3 (30.9)	13.1; 13.1; 4.6	20; 20; 7	2 (25.5)*	13.1; 12.4	20; 19
70127	2 (22.3)	13.1; 9.2	20; 14	2 (18.3)*	13.1; 5.2	20; 8

All branches to be connected in parallel.

SEU = Smallest Electrical Unit

*The OT240 has 3 output channels. Data is given for loading one 80W channel only.

Notes:


1. OPTOTRONIC power supplies are optimally paired with SYLVANIA LED modules and are specifically designed with protection features for safe operation.
2. The module is designed to work with constant voltage power supplies only. Reference the power supply PIB #ECS050 for product specific information.

Minimum and Maximum Ratings

Parameter	Values
Operating Temperature at Tc point	-30 to +75°C (-22 to +162°F)
Storage Temperature Range	-30 to +80°C (-22 to +176°F)
Voltage Range	23 – 25Vdc
Reverse Voltage	25Vdc


- Notes:
1. Exceeding maximum ratings may damage the LED module and pose potential safety hazards.
 2. Elevated operating temperatures can be expected to negatively impact the service life in terms of lumen output.
 3. In correct wiring may damage the LED module.
 4. Not intended for use with constant current power supplies.

Accessories

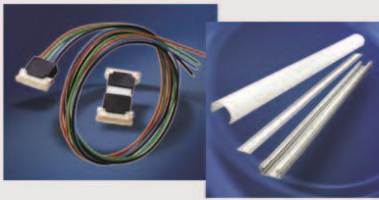


Item Number	Ordering Description	Length (in)	Description
70183	LAC-C/FT/1C/4P/20IN	20	Input Connector
70263	LAC-C/SD/BB/10mm	1.4	Board to Board Connector
70131	LAC-C/SD/BB/6IN	5.91	Board to Board Connector
71236	LAC-T/LNRLT/P/2FT	18.0	Prismatic Mounting Track
71237	LAC-T/LNRLT/P/5FT	56.0	Prismatic Mounting Track
71238	LAC-T/LNRLT/D/2FT	18.0	Diffused Mounting Track
71239	LAC-T/LNRLT/D/5FT	56.0	Diffused Mounting Track

Assembly Diagram

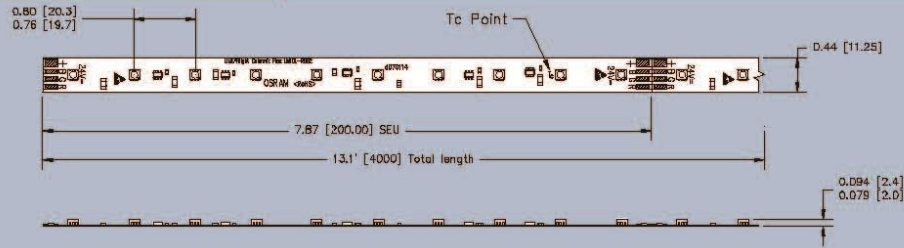

DIMENSIONS: inches [mm]
SEU = Smallest Electrical Unit

Wiring Diagram

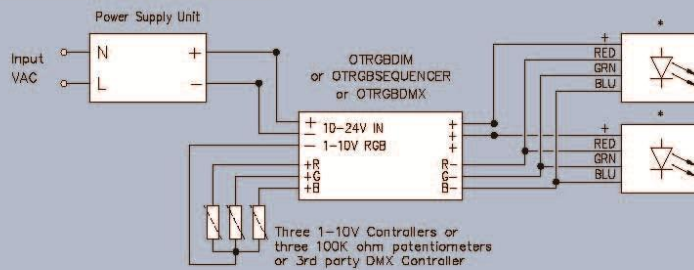

All Connections to be made in parallel
* Denotes maximum length of LED run per branch as indicated in power supply table

- LEGEND:
- Splice Point
 - Potential Splice Point
 - LED Module

fixture type: J2

www.sylvania.com/LED

HF²Narrow Stick

Compact High Intensity LED Module



The SYLVANIA HF²Narrow Stick LED module is an innovative module comprised of a closely packed array of small, discrete LEDs on boards under 5/8" wide. The module is designed to provide highly uniform, intense illumination and is available in 4" and 10". The module is also available in a half power version for most lengths and color temperatures.

HF²Narrow Stick modules may be conveniently connected end-to-end through the integrated 2-pin connectors. These modules are optimally paired with SYLVANIA OPTOTRONIC® 24 Vdc power supplies and may be dimmed using the OPTOTRONIC OT-DIM control interface.

Key Features & Benefits

- Highly dense LED spacing creates a virtually linear light source
- Narrow profile allows for easy installation in tight spaces
- Available in full and half output versions allowing for choice and customization
- Dimmable by pulse width modulation, a method that maintains consistent lumen output and color
- Long life: up to 50,000 hours (L₇₀) when temperature at T_c point is maintained below 85°C
- IES files are available at www.sylvania.com and Photopia files are available at www.ltioptics.com/sylvania

Product Offering

Ordering Abbreviation	Wattage	Color
L2LRE/24V/830/NS/4IN	1.7	3000K
L2LRE/24V/835/NS/4IN	1.7	3500K
L2LRE/24V/840/NS/4IN	1.7	4000K
L3LRE/24V/830/NS/4IN	3.4	3000K
L3LRE/24V/835/NS/4IN	3.4	3500K
L3LRE/24V/840/NS/4IN	3.4	4000K
L4LRE/24V/830/NS/10IN	4.2	3000K
L4LRE/24V/835/NS/10IN	4.2	3500K
L4LRE/24V/840/NS/10IN	4.2	4000K
L8LRE/24V/830/NS/10IN	8.4	3000K
L8LRE/24V/835/NS/10IN	8.4	3500K
L8LRE/24V/840/NS/10IN	8.4	4000K

Application Information

Applications

- Accent lighting
- Cove lighting
- Edge lighting
- Under cabinet lighting

Specifications and Certifications



The SYLVANIA HF²Narrow Stick is UL2108 Recognized for US and Canada Class 2 Unit (UL file # E247649)



This light source meets restrictions on hazardous substances.

LED085R3 6/10

SEE THE WORLD IN A NEW LIGHT



Specification Data

Catalog #	Type
Project	
Comments	
Prepared by	Date

Ordering Information

Item Number	Ordering Abbreviation	Length (in.)	No. of LEDs	Power (W)	Voltage (Vdc)	Current (mA)	Color Temperature	Initial Lumens	Beam Angle	CRI
70392	L2LRE/24V/830/NS/4IN	4	24	1.7	24	70	3000K	86	120°	85
70393	L2LRE/24V/835/NS/4IN	4	24	1.7	24	70	3500K	88	120°	85
70394	L2LRE/24V/840/NS/4IN	4	24	1.7	24	70	4000K	102	120°	85
70492	L3LRE/24V/830/NS/4IN	4	42	3.4	24	140	3000K	172	120°	85
70473	L3LRE/24V/835/NS/4IN	4	42	3.4	24	140	3500K	176	120°	85
70493	L3LRE/24V/840/NS/4IN	4	42	3.4	24	140	4000K	205	120°	85
70495	L4LRE/24V/830/NS/10IN	10	54	4.2	24	175	3000K	215	120°	85
70496	L4LRE/24V/835/NS/10IN	10	54	4.2	24	175	3500K	220	120°	85
70497	L4LRE/24V/840/NS/10IN	10	54	4.2	24	175	4000K	257	120°	85
70436	L8LRE/24V/830/NS/10IN	10	102	8.4	24	350	3000K	430	120°	85
70472	L8LRE/24V/835/NS/10IN	10	102	8.4	24	350	3500K	441	120°	85
70422	L8LRE/24V/840/NS/10IN	10	102	8.4	24	350	4000K	514	120°	85

Notes:

- All data is related to the entire module. Data reflects statistical mean values. Actual data may differ depending on variances in the manufacturing process.
- Delivered lumens per board subject to change based on shipments of lumens per LED of 3 to 9 lumens.
- Color coordinates for the 3000K (x= 4562, y= 4260), (x= 4299, y= 4165), (x= 4147, y= 3814), (x= 4373, y= 3893). Color coordinates for the 3500K (x= 4299, y= 4165), (x= 3996, y= 4015), (x= 3899, y= 3690), (x= 4147, y= 3814). Color coordinates for the 4000K (x= 4006, y= 4044), (x= 3736, y= 3674), (x= 3670, y= 3576), (x= 3898, y= 3716).
- Dry location use only.

Ordering Guide

L	2	L	R	E	/	24V	/	8	30	/	NS	/	4IN
LED	Wattage	Linear	Rigid	Engine		Voltage		CRI>80	Color Temperature 3000K		Product Family HF Narrow Stick		Length

Power Supply Information

Maximum Number of Modules per Power Supply

	0T17 (51622)	0T20 (51512)	0T50 (51598)	0T75 (51514)	0T96D (51510)	0T96 (51626*)	0T240 (51627**)
All 10" (102 LEDs) Item Numbers	1	2	5	8	10	10	8 / chnl
All 4" (42 LEDs) Item Numbers	4	5	13	20	25	25	21 / chnl
All 10" (H, 54 LEDs) Item Numbers	3	4	10	16	20	20	17 / chnl
All 4" (H, 24 LEDs) Item Numbers	9	10	26	40	51	51	42 / chnl

*NAED # 51626 has replaced NAED # 51511.
 **NAED # 51627 has replaced NAED # 51515.

Notes:

- For the 10" 102 LED version, 5 LED modules can be operated on a single feed. For the 10" 54 LED version and the 4" 42 LED version, 10 LED modules can be operated on a single feed. For the 4" 24 LED version, 24 LED modules can be operated on a single feed.
- OPTOTRONIC® power supplies are optimally paired with SYLVANIA LED modules and are specifically designed with protection features for safe operation.
- The module is designed to work with Constant Voltage power supplies only. Reference the Power Supply PIB #ECS050 for product specific information.
- These values are an approximation based on the typical "power" values listed under the "Ordering Information" parameters. To accurately determine the maximum LED load, evaluate the application based on the application note "Determining the Maximum LED Load on a Constant Voltage Power Supply" LED026. This document can be found at www.sylvania.com.
- HF Narrow Stick modules can be dimmed when used with the 0T DIM, or 0TRGBDIM controllers. Because of the power consumed by these controllers, an additional de-rating of the overall "maximum" load must be factored into the above chart. To determine this de-rating (wattage) value please reference Step 8 of this same App. Note #LED026.

Accessories



Item Number	Ordering Abbreviation	Description	Length (in.)	Order Quantity
70440	LAC-C/NS/BB/2P/2IN	Board to Board Connector	2	10
70441	LAC-C/NS/BB/2P/4IN	Board to Board Connector	4	10
70442	LAC-C/NS/BB/2P/8IN	Board to Board Connector	8	10
70443	LAC-C/NS/IC/2P/60IN	Input Connector	60	5
70444	LAC-C/NS/IC/2P/24IN	Input Connector	24	10

fixture type: J2

Product Description

3form Chroma is produced from optical grade engineered resin. Chroma is available in thick-gauge formats which lends itself well for use in many horizontal applications. Chroma is a highly functional material that brings impact when color is introduced. Chroma is produced with brilliant colors that can be layered (up to five colors) to create an enormous range of hues, opacities and amazing effects. The surface of Chroma features a durable renewable matte texture that can be easily refinished throughout its lifetime. Chroma incorporates 40% pre-consumer recycled content without compromising its amazing clarity.

Chroma XT is exterior grade Chroma suitable for use as signage, lighting, awnings, tables or canopies. Use Chroma XT to bring amazing color and design to your exterior applications.

FEATURES AND BENEFITS

- Surface is able to be completely refinished to maintain product "newness"
- Great for edge lighting – tremendous optical properties and high light transmission
- Rigid - stable and sturdy material for horizontal applications
- Qualifies for 3form Reclaim™ – keeping end-of-life material out of landfills
- Combine up to five colors to create any color imaginable

AVAILABLE COLORS

3form Chroma comes in a variety of translucent warm and cool colors. Colors can be made opaque with the addition of the color - White Out.

(Visit www.3-form.com for the complete list of available color options.)

CHROMA REFLECT

3form Chroma Reflect™ pairs beautiful 3form colors with a reflective opaque mirror. The result is a breathtaking panel that glows and radiates color like you've never seen. Chroma Reflect panels are 1-sided and opaque. Chroma Reflect can only be paired with one Chroma color. The back finish of Chroma Reflect is left unfinished to allow for more versatility during fabrication. Chroma Reflect adds an extra 1/8" (3 mm) to the standard thickness of Chroma panels. Additionally, Chroma Reflect is not suitable for exterior use and requires special fabrication techniques.

TEXTURES/PATTERNS/FINISHES

All Chroma sheets come standard with a Renewable matte finish on the front face that allows the product to be continually rejuvenated if ever desired or necessary during the service life of the material. The back side of 3form Chroma in translucent colors is finished with a matte finish, but this side should not be renewed. Chroma Clear comes standard with renewable matte surfaces on front and back.

Chroma panels can be ordered with an optional Renewable Matte Back Finish, that allows refinishing of both sides of the panel. The Renewable Matte Back Finish increases the thickness by an extra 1/16" (1.5 mm).

Chroma panels that are opaque (unless specified differently) are finished with a gloss backside texture to allow for more versatility during fabrication. Chroma is also available with an optional Patent finish. Patent is a high gloss finish with the highest light transmittance, but does not allow for refinishing. (Chroma Reflect is not available with Patent finishes)

PANEL SIZES AND TOLERANCES

All dimensions and squareness (standard or custom) are subject to a +1/4" or - 3/16" (+6 mm or -5 mm) tolerance. Squareness (standard or custom) is subject to a 1/8" (3.1 mm) tolerance.

Chroma is available in 1/2 inch (12.7 mm), 1 inch (25.4 mm) and 2 inch (50.8 mm) thicknesses.

PANEL SIZE TABLE

NOMINAL GAUGE	PANEL DIMENSIONS
1/2" (12.7 mm)	48" x 96" (122 cm x 243.8 cm), 48" x 120" (122 cm x 304.8 cm)
1" (25.4 mm)	48" x 96" (122 cm x 243.8 cm), 48" x 120" (122 cm x 304.8 cm)
2" (50.8 mm)	48" x 96" (122 cm x 243.8 cm)

Gauge tolerances are an inherent part of working with resin. Given the unique manufacturing process for 3form Chroma, a given gauge is subject to a +/- 10% thickness tolerance. Thickness tolerance readings are based on measurements along both long edges of each panel.

THICKNESS TOLERANCE TABLE

STANDARD CHROMA PANELS

GAUGE*	MINIMUM ALLOWANCE	MAXIMUM ALLOWANCE
1/2" (12.7 mm)	0.450" (11.4 mm)	0.585" (14.9 mm)
1" (25.4 mm)	0.900" (22.9 mm)	1.100" (27.9 mm)
2" (50.8 mm)	1.800" (45.7 mm)	2.200" (55.9 mm)

REFLECT, XT AND PANELS WITH RENEWABLE MATTE BACK FINISH

GAUGE*	MINIMUM ALLOWANCE	MAXIMUM ALLOWANCE
5/8" (15.9 mm)	0.515" (13.1 mm)	0.710" (18.0 mm)
1-1/8" (28.6 mm)	0.965" (24.5 mm)	1.225" (31.1 mm)
2-1/8" (53.9 mm)	1.865" (47.4 mm)	2.325" (59.1 mm)

*Chroma Reflect adds 1/8" (3 mm) and Chroma XT, HighRes and renewable matte back finish materials add 1/16" (1.5 mm) to overall thickness.



line™ .75

SYMMETRIC

Application

io Lighting's line series .75 is approximately .75" x .75" in cross section. UL listed for dry locations, its low profile housing enables functional luminous intensities from "tight" architectural details such as niches, coves and casework. Similar to halogen light sources, LEDs are point sources that offer superior definition to three-dimensional objects and sparkle to reflective surfaces.

series .75 is a low voltage linear accent luminaire that may be ordered in incremental nominal lengths that range from 6" to 96". Optional beam spreads along the perpendicular axis of the fixture include 10°, 45° and 65°. For details on the asymmetric beam spread, see dedicated specification sheet. io ensures that each LED is provided thermal and electrical management properties in accordance with the LED manufacturers recommendations. Projected average rated life is 50,000 hours at 70% of lamp lumen output. Contact factory for IES LM-80 compliance. To ensure proper performance, architectural details should allow for ventilation and air flow around the fixture. Ambient temperature surrounding the fixture shall not exceed 120°F (48.9°C).

Light Output

line series .75 is available with three lumen outputs for white light only. Red, green, blue and amber are available in high output only. All values below are initial lumens per foot. IES LM-79 format files may be obtained from the factory or downloaded from www.iolighting.com. Consult factory for High CRI options and availability.

	Standard Output	Mid Output	High Output
2700K White:	68 lms/ft	126 lms/ft	180 lms/ft
3000K White:	68 lms/ft	126 lms/ft	180 lms/ft
5000K White:	91 lms/ft	168 lms/ft	240 lms/ft

Construction

Extruded aluminum housing coupled with a patented optical assembly may not be disassembled for re-lamping. Customized acrylic optics offer very high transmissivity, UV stability and excellent longevity. Three mounting bracket options include: surface, side surface and field adjustable. Bracket material is composed of stainless steel for ease of installation and removal as required.

Electrical

Field adjustable 4'-0" 22 AWG, 300 volt rated power cords are supplied with strain reliefs. 24 volt 96 watt power supply will be provided as a standard if not specified otherwise. For detailed information regarding daisy chain limitations, remote distance limitations, power supply options, and dimming options consult the io website, the io catalog (pages 98-100) or an io representative.


Power Consumption

Standard Output:	2.92 w/ft	Mid Output:	5.34 w/ft	High Output:	7.62 w/ft
------------------	-----------	-------------	-----------	--------------	-----------

Power consumption does not include power supply losses.

Finish

Anodized aluminum finish is standard. Custom finishes may be available upon request.



io line .75 45°, 3KH0

lighting facts™

A Program of the U.S. DOE

Light Output (Lumens)	300
Watts	20.9
Lumens per Watt (Efficacy)	14
Color Accuracy <small>Color Rendering Index (CRI)</small>	72
Light Color <small>Correlated Color Temperature (CCT)</small>	3003 (Bright White)
<small>2700K</small>	<small>3000K</small>
<small>4500K</small>	<small>6500K</small>

All results are according to IESNA LM-79-2004: Approved Method for the Electrical and Photometric Testing of Solid State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.


Registration Number: 6 PRAJ475J
Model Number: 003.I3KH0.45.1.052
Type: Shelf-mounted task light

Label references 30" line .75 symmetric fixture with a 45° beam spread in High Output 3000K. Lighting Facts for additional beam spreads and light output levels may be obtained from io Lighting.




Light Output / Distributions / Electrical Feed Options


3KHO 10 DEGREE



3KHO 45 DEGREE



3KHO 65 DEGREE



Charts reference 30° line .75 symmetric fixture in High Output 3000K.

LIGHT OUTPUT CONVERSION TABLE


White Light Output	3000K S.O.	3000K M.O.	3000K H.O.	5000K S.O.	5000K M.O.	5000K H.O.
Light Output Multiplier	0.38 ⁽¹⁾	0.70 ⁽¹⁾	1.0 ⁽¹⁾	0.51 ⁽¹⁾	0.93 ⁽¹⁾	1.33 ⁽¹⁾

Color Light Output	RED	GREEN	BLUE	AMBER
Light Output Multiplier	0.53 ⁽²⁾	0.51 ⁽²⁾	0.30 ⁽²⁾	0.51 ⁽²⁾


IES format photometrics may be downloaded from www.iolighting.com.

Note: 2700K and 3000K have same light output.

NEW FIELD CONFIGURABLE ELECTRICAL FEED



Note: Electrical contractor may adjust orientation of electrical feed in the field.



End feed

Right side feed

Left side feed


Top feed

Secondary End Cap


Mounting Options




100 Surface (io part #: SA.BK.SURF)



101 Side surface (io part #: SA.BK.WALL)



102 Field adjustable (io part #: SA.BK.ADJMT)



0	03	1								
io	1	2	3	4	5	6	7	8	9	10

Order Code

1. LINE SERIES
03 .75 S.O, M.O or H.O

2. LOCATION
1 Interior

3. COLOR

- 27K White 2700K (Standard)⁽¹⁾
- 27KMO White 2700K (Mid Output)⁽¹⁾
- 27KHO White 2700K (High Output)⁽¹⁾
- 3K White 3000K (Standard)⁽¹⁾
- 3KMO White 3000K (Mid Output)⁽¹⁾
- 3KHO White 3000K (High Output)⁽¹⁾
- 5K White 5000K (Standard)⁽¹⁾
- 5KMO White 5000K (Mid Output)⁽¹⁾
- 5KHO White 5000K (High Output)⁽¹⁾
- R Red⁽³⁾
- G Green⁽³⁾
- B Blue⁽³⁾
- A Amber⁽³⁾

4. DISTRIBUTION

- 10 10 Degree
- 45 45 Degree
- 65 65 Degree

5. MOUNTING

- 100 Surface
- 101 Side surface
- 102 Field adjustable

6. FINISH

- 1 Anodized aluminum
- 2 Anodized custom color

7. LENGTH

UNITS (ACTUAL)

- 01 6" (6.53")
- 02 12" (12.22")
- 03 18" (17.97")
- 04 24" (23.53")
- 05 30" (29.22")
- 06 36" (34.97")
- 07 42" (40.53")
- 08 48" (46.22")
- 09 54" (51.97")
- 10 60" (57.53")
- 11 66" (63.22")
- 12 72" (68.97")
- 13 78" (80.22")⁽³⁾
- 14 84" (85.97")⁽³⁾
- 15 90" (91.53")⁽³⁾
- 16 96" (97.22")⁽³⁾

8. ELECTRICAL FEED

- 2 One end feed
 - 22 Double end feed
- Note: Electrical contractor may adjust orientation of electrical feed in the field.

9. VOLTAGE / DIMMING

- 1 120v
- 2 277v
- 3 120v w/dim
- 4 277v w/dim
- 5 Other

10. SPECIFY DRIVER / DIMMING

Note: If not specified otherwise, io will supply 96 watt drivers. Refer to pages 98-100 for Power Supply options or download Power Supply specification sheet from www.iolighting.com.

SSL Chromaticity Standard: ANSI C78.337		
Color	Nominal CCT	Target CCT & Tolerance (K)
White	2700K	2725 ± 145
White	3000K	3045 ± 175
White	5000K	5028 ± 283

For Metric Conversion		
1"	1"	1"
25.4mm	2.54cm	0.3m

Footnotes

- 1. White light variance between LEDs within a single fixture will not exceed ANSI Binning Standards.
- 2. Refer to conversion table for output. Only available in 7:6 w/ft.
- 3. High Output only available in lengths up to 72".



io Lighting 1100 Busch Pkwy Buffalo Grove, IL 60089

T 847.777.3900 F 847.777.3901 E info@iolighting.com W iolighting.com


winonaLED

Project: _____ Qty: _____

Type:

winline cove 204 dry

Quick Find #: 2043

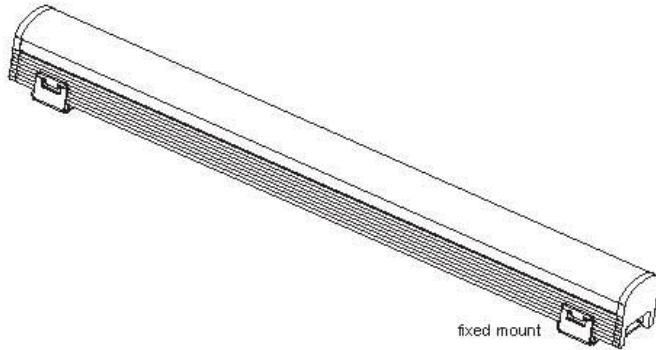

The **Winline 200 Series** are small scale linear LED luminaires and were designed to be the most powerful, reliable, and easiest to implement linear LED solution available. The model 204 is a high performance luminaire with robust construction suitable for small cove illumination.

Beam Spreads: The model 204 is available in one beam spread of 130 degrees. See page 4 for photometric data.

Color & Light Output: The 200 Series utilizes Nichia 123B white LEDs in five standard colors. Model 204 features (24) LED s/ft.

Color	Model 204
ANSI-2700K White	128 lm/ft
ANSI-3000K White	151 lm/ft
ANSI-3500K White	157 lm/ft
ANSI-4000K White	168 lm/ft
non-ANSI-5000K White	212 lm/ft

Results based on BALL test 15389
130° beam spread
Note:
LM79 Tests- see page 4.

Power: Power consumption is 4.5W/ft. The Winline 200 series operates on 24VAC using Magnetic Transformers. A wide range of remote transformers are available in 120V and 277V primary.

Dimming: Used with remote mounted 24VAC magnetic transformers which can be dimmed with commonly available low voltage magnetic dimming equipment.

Mounting & Adjusting: A unique 1-piece mount combined with an integral wire tray allows the 200 Series to be easily installed. The installer locates and fastens the mount clip, runs power feed lines inside the clips, connects the fixture's wire leads to the feed lines and snaps the fixture in place. The integral wire cover of the 204 keeps wiring hidden and organized. See pages 2-3 for more mounting information.

Operating Temperature: Minimum and Maximum ambient air temperatures around this luminaire shall not exceed -22°F to 122°F (-30°C to 50°C). Any application of this product should also take into consideration air flow and ventilation to ensure performance and reliability.

Weight:

12" - .65 lbs	36" - 1.85 lbs
18" - .94 lbs	42" - 2.15 lbs
24" - 1.25 lbs	48" - 2.45 lbs
30" - 1.55 lbs	

Listing:  Winline 204 is ETL listed for dry location. Complies with UL Standard 2108

 **RoHS** COMPLIANT

Winline Cove - WCV	WCV series
model 204 dry - 204	204 model
Total Run Length in Feet 204 offered in 6" increments starting at 12" ex. 60FT = 60 footrun or Preconfigured Run Length Code see page 5 or To Be Determined TBD when run length unknown	run length code
130° - 130	130 beam spread
ANSI-binned 2700K - 27K ANSI-binned 3000K - 30K ANSI-binned 3500K - 35K ANSI-binned 4000K - 40K non-ANSI-binned 5000K - 50K	LED code
non-dimming 24 volt AC - ND24V dimming 24 volt AC - DM24V	voltage
fixed - F	F mount
natural type III anodized aluminum - HAA	HAA finish
surface end feed - SE recessed bottom feed - RB	power feed
standard - STD modified - MOD	special
Describe Modification: <div style="border: 1px solid black; height: 80px; width: 100%;"></div>	






winline cove 204 dry

photometrics

130°



Maximum Candela = 226 Located At Horizontal Angle = 0, Vertical Angle = 5
 #1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)
 #2 - Vertical Plane Through Horizontal Angles (90-270)

BALL Test Report: 15389 Catalog Number: WCV-204-48-130-30K
 Description: 96 Nichia 1238 3000K LEDs / 48" Winline 204 Dry Luminaire / Extruded Aluminum Housing / Acrylic Lens

LM79 Data - Based on WCV204/130° Test Results

Color	Total Lumens	Lamp Watts	Lumens per Watt	CRI	Power Factor
ANSI-Blended 2700K	513	15.7	32.7	84.3	.97
ANSI-Blended 3000K	604	16.7	36.2	86.8	1.00
ANSI-Blended 3500K	628	16.7	37.6	83.0	.98
ANSI-Blended 4000K	610	16.7	36.5	87.0	.98
ANSI-Blended 5000K	846	16.7	50.7	70.3	.98

Zonal Lumen Summary
 Nichia 1238 3000K

Zone	Lumens	%Fixture
0-30	113	28.7
0-40	282	46.7
0-60	478	79.2
0-90	590	97.6
Total Luminaire	604	100.0

Candlepower Distribution 3000K

H P R	Horizontal Plane				
	0	22.5	45	67.5	90
0	222	222	222	222	222
10	223	218	217	218	216
15	218	214	212	212	210
20	211	206	205	206	205
25	200	196	197	199	197
30	188	186	187	187	184
35	175	173	174	173	170
40	158	158	160	164	162
45	143	142	140	133	132
50	121	124	118	118	118
60	73	76	73	84	83
70	28	40	49	53	53
80	5	17	26	32	32
90	0	5	12	13	13
100	0	2	5	7	7
120	0	0	2	4	4
140	0	0	0	1	1
160	0	0	0	0	0
180	0	0	0	0	0

lighting facts^{CM}
 A Program of the U.S. DOE

Light Output (Lumens) 604
Watts 16.7
Lumens per Watt (Efficacy) 36

Color Accuracy 87
 Color Rendering Index (CRI)

Light Color 3030 (Bright White)
 Correlated Color Temperature (CCT)

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: 84Q4-ECSVRH
 Model Number: WCV-204-4-130-30K
 Type: Cove light



06.11 · Technische Änderungen vorbehalten · Technical amendments reserved · Sous réserve de modifications techniques



BEGA Lichttechnische Spezialfabrik
Hannenbusch · D - 58708 Menden

BEGA

Gebrauchsanweisung
Instructions for use
Fiche d'utilisationAufsatzleuchte
Pole top luminaire
Luminaire tête de mât

IP 65

8230

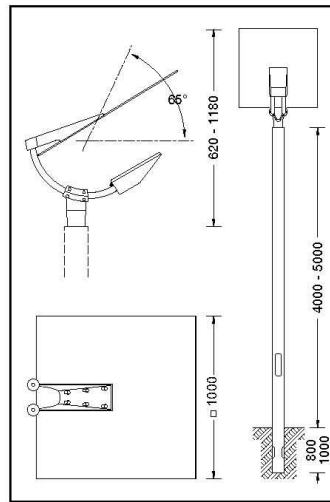**Anwendung**

Mastaufsatzleuchte für flächige indirekte Beleuchtung.
Das Licht des Hochleistungsscheinwerfers wird über einen quadratischen Dachreflektor umgelenkt. Diese Umlenkung bewirkt eine besonders weiche und gleichmäßige Lichtstärkeverteilung und eine optimale Entblendung.
Symmetrische Lichtstärkeverteilung bei waagrecht eingestelltem Dachreflektor und asymmetrische Lichtstärkeverteilung bei geschwenktem Dachreflektor 0 - 65°. Für Lichtpunkthöhen von 4000 - 5000 mm.

Application

Pole top luminaire for flat, indirect lighting.
The light from the high-power floodlight is redirected by a square top reflector, producing a particularly soft and uniform light distribution and optimum glare suppression.
Symmetrical light distribution is produced when the top reflector is set in a horizontal position and asymmetrical light distribution when the top reflector is swivelled 0 - 65°. For mounting heights 4000 - 5000 mm.

Utilisation

Luminaire tête de mât pour éclairage indirect extensif.
Le faisceau puissant du projecteur est dirigé sur un réflecteur carré qui procure une lumière douce et uniforme avec un confort visuel optimal.
Un réglage progressif de 0 - 65 ° permet une répartition lumineuse symétrique lorsque le réflecteur est horizontal et asymétrique lorsqu'il est incliné.
Pour hauteurs de feu de 4000 - 5000 mm.

Produktbeschreibung

Leuchte besteht aus Aluminiumguss, Aluminium und Edelstahl
Sicherheitsglas klar
Silikonichtung
Reflektor aus eloxiertem Reinst-Aluminium
Schwenkbereich Dachreflektor 0-65°
Für Mastkopf ø 76 mm
Einstecktiefe 105 mm
Leuchte mit fest angeschlossener Verbindungsleitung H05RN-F 3x1⁰
Leitungslänge 5 m
Fassung RX 7s
Vorschaltgerät 230/240/250 V ~ 50 Hz umschaltbar · Versandschaltung 230 V
Zündgerät mit Timer bis 250 V ~ 50/60 Hz
Befestigungsmöglichkeit für Kompensationskondensator
Schutzklasse I
Schutzart IP 65
Staubdicht und Schutz gegen Strahlwasser
CE – Konformitätszeichen
Windangriffsfläche: 0,91 m²
bei 65° geschwenktem Dachreflektor
Gewicht: 33,0 kg

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
Clear safety glass
Silicone gasket
Reflector made of anodised pure aluminium
Swivel range of square-top-reflector 0 - 65°. For pole top ø 76 mm
Slip fitter insert depth 105 mm
Luminaire with fixed connecting cable H05RN-F 3x1⁰
Cable length 5 m
Lampholder RX 7s
Ballast 230/240/250 V ~ 50 Hz tapped · Dispatch connection 230 V
Ignitor with timer up to 250 V ~ 50/60 Hz
Prepared for PF correction capacitor
Safety class I
Protection class IP 65
Dust tight and protection against water jets
CE – Conformity mark
Wind catching area: 0.91 m² with swivelled square-top-reflector at 65°. Weight: 33.0 kg

Description du produit

Luminaire fabriqué en fonte d'aluminium et acier inoxydable
Verre de sécurité clair
Joint silicone
Réflecteur en aluminium pur anodisé
Inclinaison du toit réflecteur 0-65°. Pour tête de mât ø 76 mm
Profondeur d'embout 105 mm
Luminaire livré avec câble raccordé H05RN-F 3x1⁰
Longueur de câble 5 m
Douille RX 7s
Ballast 230/240/250 V ~ 50 Hz permutable · Branchement d'usine 230 V
Amorceur temporisé max. 250 V ~ 50/60Hz
Fixation prévue pour condensateur de compensation
Classe de protection I
Degré de protection IP 65
Étanche à la poussière et protégé contre les jets d'eau
CE – Sigle de conformité
Prise au vent: 0,91 m² si le toit réflecteur est incliné de 65°
Poids: 33,0 kg

Sicherheit

Für die Installation und für den Betrieb dieser Leuchte sind die nationalen Sicherheitsvorschriften zu beachten. Der Hersteller übernimmt keine Haftung für Schäden, die durch unsachgemäßen Einsatz oder Montage entstehen. Werden nachträglich Änderungen an der Leuchte vorgenommen, so gilt derjenige als Hersteller, der diese Änderungen vornimmt.

Montage

Die Leuchte darf ohne Sicherheitsglas nicht betrieben werden.
Zum Lampeneinbau Leuchte öffnen:
Schrauben lösen. Abdeckrahmen mit Sicherheitsglas und Reflektor abhängen. Zwei Seile sichern den Abdeckrahmen.
Lampe einsetzen:
Lampenkolben nicht mit den Fingern berühren. Lampe beim Einsetzen nicht verkanten. Bruchgefahr. Lampe in eine Fassungsseite soweit eindrücken, bis sich die andere Seite einsetzen läßt. Auf gute Kontaktgabe achten, Lampe leicht hin und herdrehen. Auf richtigen Sitz der Dichtung achten. Abdeckrahmen aufsetzen und Schrauben über Kreuz gleichmäßig anziehen. Verbindungsleitung in den Mastzopf einführen und Leuchte aufsetzen. Leuchte ausrichten und befestigen. Anzugsdrehmoment = 12 Nm. Beim Kürzen der Verbindungsleitung ist für den Verstellbereich der Leuchte eine Leitungsreserve von 0,5 m vorzusehen. Die Verbindungsleitung darf nur in einem Anschlusskasten entsprechender Schutzart und Schutzklasse angeschlossen werden.

Safety indices

The installation and operation of this luminaire are subject to national safety regulations. The manufacturer is then discharged from liability when damage is caused by improper use or installation. If any luminaire is subsequently modified, the persons responsible for the modification shall be considered as manufacturer.

Installation


The luminaire must not be operated without the safety glass.
To insert lamp open the luminaire:
Undo screws. Hang down cover frame with safety glass and reflector.
Two steel cable secure the cover frame.
Insert lamp:
Do not touch lamp bulb with fingers. When inserting the lamp do not cant it. Risk of breakage.
Push the lamp into one side of the lampholders until it can be slipped into the other one. Make sure contact is good by gently moving the lamp back and forth.
Make sure that gasket is positioned correctly. Install the cover frame and tighten the screws crosswise evenly.
Lead luminaire connecting cable into the pole top and put on luminaire.
Align luminaire and fix it.
Torque = 12 Nm.
When shortening the connecting cable provide a cable reserve of 0.5 m for the adjustable range of the luminaire.
The connecting cable must only be connected in a connection box with corresponding protection class and safety class.

Sécurité

Pour l'installation et l'utilisation de ce luminaire, respecter les normes de sécurité nationales. Le fabricant décline toute responsabilité résultant d'une mise en œuvre ou d'une installation inappropriée du produit. Toutes les modifications apportées au luminaire se feront sous la responsabilité exclusive de celui qui les effectuera.

Installation

Le luminaire ne doit fonctionner sans verre de sécurité.
Pour installer la lampe, ouvrir le luminaire:
Desserrer les vis. Ouvrir le cadre avec le verre de sécurité et le réflecteur. Deux filins en acier retiennent le cadre.
Installer la lampe:
Ne pas toucher la lampe avec les doigts. Ne pas forcer la lampe lors de sa mise en place afin de ne pas la briser.
Enfoncer un culot de la lampe dans une douille jusqu'au moment où le deuxième culot se laisse facilement mettre en place. Assurer un parfait contact de la lampe en la manœuvrant légèrement à l'intérieur des douilles.
Veiller au bon emplacement du joint. Reposer le cadre et serrer en croix et régulièrement les vis.
Introduire le câble de raccordement du luminaire dans l'ouverture au sommet du mât et placer le luminaire sur le mât.
Ajuster le luminaire et fixer.
Moment de serrage = 12 Nm.
Lors du raccourcissement du câble de raccordement une réserve de câble de 0,5 m doit être prévue pour la plage de réglage du luminaire.
Le câble de raccordement ne doit être branché que dans une boîte de connexion dont le degré et la classe de protection sont appropriés protégée.

**Ausstrahlrichtung einstellen:**

Das gesamte System ist in den Lagerschalen der Aufsatzmuffe stufenlos einstellbar. Einer der beiden Rohrbögen ist auf der Innenseite mit einer Skalierung versehen, die den Anstellwinkel des Leuchtensystems in 5° Schritten anzeigt.

Zum Einstellen - Innensechskantschrauben M8 - in den Lagerschalen gleichmäßig lösen. Für eine symmetrische Lichtstärkeverteilung - waagerechte Position des Dachreflektors - liegt das Leuchtgehäuse direkt an der Lagerschale an.

Bitte beachten Sie:

Die Verschraubung des Metall-Wellenschlauches an der Aufsatzmuffe wurde werkseitig nicht angezogen.

Nach Einstellung der Ausstrahlrichtung ist der Längenausgleich des Metall-Wellenschlauches in die Aufsatzmuffe zurückzuschieben und die Leitungsverraubung fest anzuziehen.

Adjustment of the beam angle:

The complete system is infinitely adjustable in the bearings of the pole cap. On the inside of one of the bent tubes a scaling showing the angle of attack is marked for the luminaire system in steps of 5°.

For positioning undo evenly the hexagon socket head screw M8 in the bearings.

For a symmetrical light distribution - horizontal position of the top reflector - the luminaire housing is fixed next to the bearing flange.

Please note:

The screw connection of the metal corrugated tube at the pole cap has not been tightened in the factory.

After adjustment of the beam angle push back the length adjustment of the metal corrugated tube into the pole cap and tighten the screw cable gland firmly.

Réglage de la répartition lumineuse.

Les cerceaux supportant le luminaire coulissent de façon continue dans un berceau situé en tête de mât.

L'intérieur d'un des tubes est gradué tous les 5° pour permettre un réglage précis.

Le réglage se fait en desserrant uniformément les vis M8 situées sur les demi-coquilles du berceau.

La répartition lumineuse est symétrique lorsque le boîtier du projecteur est en butée sur le berceau.

Attention:

Le vissage de la gaine flexible métallique au manchon n'est pas serré à l'usine.

Après l'orientation du faisceau, la gaine flexible métallique doit être repoussée dans le manchon et le presse-étoupe bien serré.

Drive-over in-grade luminaires to illuminate ground surfaces

Housing: Constructed of .125" thick machined stainless steel welded to a stainless steel bottom mounting plate. Trim/Clamping ring is heavy, machined bronze.

Enclosure: Top enclosure is constructed of copper free die-cast aluminum alloy secured by two (2) captive socket head stainless steel screws. Clear, borosilicate focusing lens with molded one piece, high temperature silicone rubber gasket. Symmetrical reflector and internal lamp shield are included.

Electrical: G4, bi-pin lampholder with a ceramic insulator and high temperature leads. Luminaires pre-wired with two (2) ten (10) foot lengths of #12 AWG solid THHN wire (longer lengths of wire are available upon request) and a water tight cable gland that connects to 1/2" threaded conduit. These luminaires require a remotely located 12V class 2 safety transformer (by others). Lamp supplied.


Note: Lamps supplied with luminaire pre-wired at factory. A separate waterproof wiring box for power supply must be provided (by contractor).

Finish: Standard finish is an eight step process consisting of two coats of graphite gray high solids, UV stabilized polyurethane, one with light texture over a phosphate base. Custom colors are not available.

UL Listed, suitable for wet locations and vehicle drive over. Protection class: IP67.

Note: A foundation and proper drainage must be supplied by the contractor. These luminaires are designed to bear pressure loads up to 2,200 lbs. from vehicles with pneumatic tires. The luminaires must not be used for traffic lanes where they are subject to horizontal pressure from vehicles braking, accelerating and changing direction.

Type:
 BEGA Product:
 Project:
 Voltage:
 Color:
 Options:
 Modified:

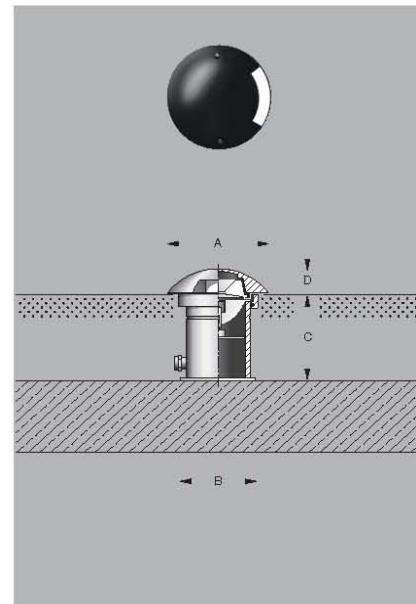


Single 60° port		Lumen	A	B	C	D
Lamp						
8778	1 20W T3 G4,12V	320	4 3/4	3 1/2	4 3/8	1 1/8

BEGA-US 1000 BEGA Way, Carpinteria, CA 93013 (805)684-0533 FAX (805)566-9474 www.bega-us.com
 ©copyright BEGA-US 2010 Updated 6/10

fixture type: N1

20.11 · Technische Änderungen vorbehalten · Technical amendments reserved · Sous réserve de modifications techniques

Gebrauchsanweisung Instructions for use Fiche d'utilisation		LED Einbauleuchte LED Recessed luminaire Luminaire à encastrer à LEDs		IP 65	BEGA BEGA Lichttechnische Spezialfabrik Hannenbusch · D - 58708 Menden	2204
-------------------------------------------------------------------	--	-----------------------------------------------------------------------------	--	-------	------------------------------------------------------------------------------	------

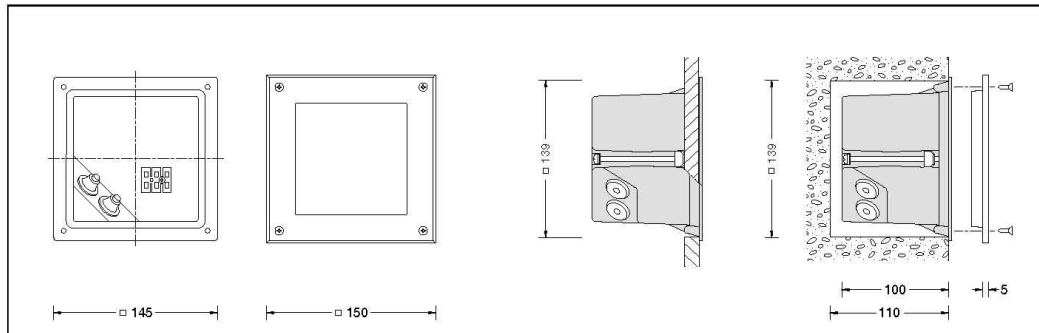**Anwendung**

LED-Einbauleuchte für orientierende Beleuchtungsaufgaben.
Hohe Wirtschaftlichkeit durch lange Wartungsintervalle und hohe Lichtleistung bei niedrigem elektrischen Anschlusswert.

Application

Recessed LED luminaire for orientating lighting tasks.
High operating efficiency because of long maintenance intervals and high light output with low connected load.

Utilisation

Luminaire à encastrer à LEDs pour un éclairage d'orientation.
Installation économique grâce à une faible maintenance et un rendement élevé pour une faible consommation.

Lampe

LED 10 W
Anschlussleistung 24 W
Farbtemperatur 3000 K

440 lm

Lamp

LED 10 W
Connected wattage 24 W
Colour temperature 3000 K

440 lm

Lampe

LED 10 W
Puissance de raccordement 24 W
Température de lumière 3000 K

440 lm

Produktbeschreibung

Leuchte besteht aus Aluminiumguss, Aluminium und Edelstahl
Sicherheitsglas weiß
Silikonichtung
Befestigung über zwei keilförmig angebrachte, verstellbare Krallen
Europäisches Patent EP 0 686 806
2 Leitungseinführungen zur Durchverdrahtung der Netzanschlussleitung bis \varnothing 10,5 mm max. 3 x 1,5^D
Anschlussklemme und Schutzleiterklemme 2,5^D
Elektronisches Netzteil 220-240 V \sim 0/50-60 Hz
Schutzklasse I
Schutzart IP 65
Staubdicht und Schutz gegen Strahlwasser
▽ Zeichen – Leuchte ist für die Montage auf normal entflammbar Befestigungsfächen geeignet
CE – Konformitätszeichen
Gewicht: 1,0 kg

Product description

Luminaire made of aluminium alloy, aluminium and stainless steel
White safety glass
Silicone gasket
Fixing is achieved by using two adjustable wedge-shaped claws
European patent EP 0 686 806
2 cable entries for through-wiring of mains supply cable up to \varnothing 10,5 mm max. 3 x 1,5^D
Connecting terminal and earth conductor terminal 2,5^D
Electronic power supply unit 220-240 V \sim 0/50-60 Hz
Safety class I
Protection class IP 65
Dust tight and protection against water jets
▽ Symbol – Luminaire is suitable for mounting on normal inflammable fixing surfaces
CE – Conformity mark
Weight: 1.0 kg

Description du produit

Luminaire fabriqué en fonte d'aluminium, aluminium et acier inoxydable
Verre de sécurité blanc
Joint silicone
La fixation s'effectue par deux griffes réglables en forme de clavette
Brevet européen EP 0 686 806
2 entrées de câble pour branchement en dérivation d'un câble de raccordement jusqu'à \varnothing 10,5 mm max. 3 x 1,5^D
Bornier et borne de mise à la terre 2,5^D
Bloc d'alimentation électronique 220-240 V \sim 0/50-60 Hz
Classe de protection I
Degré de protection IP 65
Étanche à la poussière et protégé contre les jets d'eau
▽ Sigle – Luminaire approprié à l'installation sur des surfaces de fixation normalement inflammables
CE – Sigle de conformité
Poids: 1,0 kg

Einbau

Die Leuchte darf nicht dauerhaft mit aggressiven Medien in Kontakt kommen. Aggressive Medien können durch Wasser aus Baustoffen gewaschen werden und das Gehäuse der Leuchte zerstören. Bei unbekannter Zusammensetzung der Baustoffe ist daher vor der Montage eine Materialanalyse vorzunehmen. Aggressive Medien können auch von der Oberfläche ausgehend auf die Leuchte einwirken, daher ist ein übermäßiger Einsatz von chemischen Reinigungsmitteln im Umfeld der Leuchte zu vermeiden.

Installation

The luminaire must not permanently get in contact with aggressive media. Aggressive media might be washed out of the building material and might corrode the housing of the luminaire. In case of an unknown composition of the building material an analysis of the material should be made before installation. Aggressive media that is outgoing from the installation surface might also affect the luminaire. Thus an overuse of chemical cleansing agents in the surroundings of the luminaire should be avoided.

Installation


Le luminaire ne doit pas être durablement en contact avec des substances corrosives. Des suintements corrosifs provenant des matériaux de construction peuvent altérer le boîtier. Si on ne connaît pas la nature des matériaux de construction, il faut les analyser avant l'installation du luminaire. Certaines substances corrosives pouvant également attaquer la surface du luminaire, il faut donc limiter l'utilisation de produits chimiques de nettoyage aux abords de l'appareil.

18.11 · Technische Änderungen vorbehalten · Technical amendments reserved · Sous réserve de modifications techniques

BEGA Lichttechnische Spezialfabrik
Hannenbusch · D - 58708 Menden**BEGA**Gebrauchsanweisung
Instructions for use
Fiche d'utilisationEinbauleuchte
Recessed luminaire
Luminaire à encastrer

IP 67/65

2006

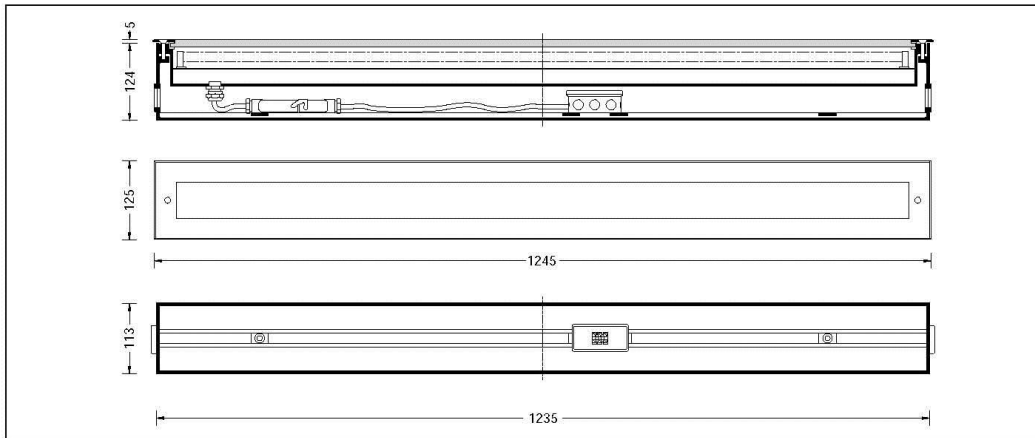**Anwendung**

Einbauleuchte mit hoher Schutzart für eine Vielzahl von Beleuchtungsaufgaben. Für den Einbau in Wände im Innen- und Außenbereich. Einbau in waagerechter oder in senkrechter Brennlinie möglich.

Application

Recessed luminaire with high protection class for a variety of lighting functions. For recessed installation in walls in interior and exterior application. Installation possible in horizontal or vertical burning position.

Utilisation

Luminaire à encastrer avec un degré de protection élevé pour diverses applications d'éclairages. Pour encastrer dans des murs à l'intérieur et l'extérieur. Installation possible en position verticale ou horizontale.

Produktbeschreibung

Leuchte besteht aus Aluminium und Edelstahl. Frontplatte besteht aus Edelstahl. Werkstoff-Nr. 1.4301. Sicherheitsglas weiß. Einbaugehäuse aus Aluminium, mit 2 gegenüberliegenden Einführungen für Installationsrohre bis \varnothing 30 mm. Silikonichtung. 2 Schiebemuttern M6 zur Aufnahme der beiliegenden Gewindestangen für eine zusätzliche Fixierung des Einbaugehäuses während der Montage. Zentrierplatte aus verzinktem Stahl mit 6 Befestigungslöchern \varnothing 4 mm und 2 Bohrungen \varnothing 8,5 mm. Sie dient zur Positionierung des Einbaugehäuses auf der Verschalung und schützt es während der Bauzeit vor Verschmutzung. Anschlusskasten mit Zugentlastungsschelle und 3-poliger Klemme 4⁰ zur Durchverdrahtung der Netzanschlussleitung max. 3 x 2,5⁰. Elektrische Verbindung zwischen Leuchten- und Einbaugehäuse über eine Steckverbindung Fassung G 5. Elektronisches Vorschaltgerät EVG 220-240 V \sim 0/50-60 Hz Schutzklasse I. **Leuchtgehäuse:** Schutzart IP 67. Staubdicht und Schutz gegen zeitweiliges Untertauchen. **Anschlusskasten:** Schutzart IP 65. Staubdicht und Schutz gegen Strahlwasser. ∇ Zeichen – Leuchte ist für die Montage auf normal entflammaren Befestigungsfächen geeignet. CE – Konformitätszeichen. Gewicht: 13,0 kg.

Product description

Luminaire made of aluminium and stainless steel. Front plate made of stainless steel. Steel grade no. 1.4301. White safety glass. Recess housing made of aluminium, with 2 opposite insertions for installation conduits of up to \varnothing 30 mm. Silicone gasket. 2 sliding nuts M6 suitable for the enclosed threaded rods for an additional fixation of the recess housing during installation. Centre-plate made of hot-dip galvanized steel with 6 fixing holes \varnothing 4 mm and 2 holes \varnothing 8,5 mm. It supports centering and positioning of the recess housing on the sheathing and also protects it during building activity against soiling. Connection box with strain relief clamp and 3-pole terminal 4⁰ for through-wiring of mains supply cable max. 3 x 2,5⁰. Electrical connection between luminaire housing and recess housing by means of a plug connection. Lampholder G 5. Electronic ballast 220-240 V \sim 0/50-60 Hz. Safety class I. **Luminaire housing:** Protection class IP 67. Dust tight and protection against temporary immersion. **Connection box:** Protection class IP 65. Dust tight and protected against water jets. ∇ Symbol – Luminaire is suitable for mounting on normal inflammable fixing surfaces. CE – Conformity mark. Weight: 13,0 kg.

Description du produit

Luminaire fabriqué en aluminium et acier inoxydable. Façade en acier inoxydable. Matériau No. 1.4301. Verre de sécurité blanc. Boîtier d'encastrement fabriqué en aluminium, avec 2 entrées opposées pour gaines d'installation jusqu'à \varnothing 30 mm. Joint silicone. 2 écrous coulissants M6 pour l'installation des tiges filetées fournies pour une fixation additionnelle du boîtier d'encastrement pendant le montage. Gabarit de centrage en acier zingué avec 6 trous de fixation \varnothing 4 mm pour le marquage du positionnement et 2 trous \varnothing 8,5 mm. Il sert à positionner le boîtier d'encastrement sur le coffrage. Pendant la phase de construction, il protège également le boîtier contre les salissures et les éclaboussures. Boîte de connexion avec collier anti-traction et avec bornier tri-polaire 4⁰ pour branchement en dérivation des câbles de raccordement 3 x 2,5⁰. Connexion électrique entre le boîtier du luminaire et le boîtier d'encastrement à l'aide du connecteur embrochable. Douille G 5. Ballast électronique 220-240 V \sim 0/50-60 Hz. Classe de protection I. **Boîtier du luminaire:** degré de protection IP 67. Étanche à la poussière et protégé contre l'immersion momentané. **Boîte de connexion:** degré de protection IP 65. Étanche à la poussière et protégé contre les jets d'eau. ∇ Sigle – Luminaire approprié à l'installation sur des surfaces de fixation normalement inflammables. CE – Sigle de conformité. Poids: 13,0 kg.

Sicherheit


Für die Installation und für den Betrieb dieser Leuchte sind die nationalen Sicherheitsvorschriften zu beachten. Der Hersteller übernimmt keine Haftung für Schäden, die durch unsachgemäßen Einsatz oder Montage entstehen. Werden nachträglich Änderungen an der Leuchte vorgenommen, so gilt derjenige als Hersteller, der diese Änderungen vornimmt.

Einbau

Die Leuchte darf nicht dauerhaft mit aggressiven Medien in Kontakt kommen. Aggressive Medien können durch Wasser aus Baustoffen gewaschen werden und das Gehäuse der Leuchte zerstören. Bei unbekannter Zusammensetzung der Baustoffe ist daher vor der Montage eine Materialanalyse vorzunehmen. Aggressive Medien können auch von der Oberfläche ausgehend auf die Leuchte einwirken, daher ist ein übermäßiger Einsatz von chemischen Reinigungsmitteln im Umfeld der Leuchte zu vermeiden.

Montage

Leuchte aus dem Einbaugehäuse ausbauen. Dazu Schrauben im Edelstahlrahmen lösen. Leuchte aus dem Einbaugehäuse heben. **Gebrauchslage des Einbaugehäuses**
»Pfeil unten« beachten.

**A: Einbau in Sichtbeton**

Einbaugehäuse einmessen. Zentrierplatte **Z** auf der Schalung anbringen. Sie dient der Positionierung des Einbaugehäuses und soll auch während der Bauzeit das Einbaugehäuse vor Verschmutzung schützen. Die M6 Schiebemuttern für die Aufnahme der beliebigen Gewindestangen ermöglichen eine Fixierung des Einbaugehäuses auf der Verschalung. Einbaugehäuse über die Zentrierplatte setzen und befestigen. Gegebenenfalls abdichten. Leitungseinführungen entsprechend den verlegten Installationsrohren ausschneiden. Installationsrohre in das Einbaugehäuse einführen.

B: Putzbündiger Einbau

Leitungseinführungen entsprechend den verlegten Installationsrohren ausschneiden. Installationsrohre in das Einbaugehäuse einführen. Die Zentrierplatte **Z** einsetzen. Sie soll das Einbaugehäuse während der Bauzeit vor Verschmutzung schützen. Zentrierplatte ggf. mit den beiliegenden Gewindestangen im Einbaugehäuse befestigen. Gegebenenfalls abdichten. Einbaugehäuse in der vorgesehenen Position einmauern. Dabei ist zu beachten, daß die Vorderkante des Einbaugehäuses mit der Putzoberfläche bündig abschließt.

C: Einbau in Leichtbauwände:

Bei Erstellung der Leichtbauwand ist eine rückseitige Stützkonstruktion zur Befestigung des Einbaugehäuses anzubringen. Es ist eine Einbauöffnung von 1235 x 115 mm mit einer Mindestdiefe von 125 mm erforderlich. Einbauöffnung ausschneiden und Einbaugehäuse befestigen.

Safety indices


The installation and operation of this luminaire are subject to national safety regulations. The manufacturer is then discharged from liability when damage is caused by improper use or installation. If any luminaire is subsequently modified, the persons responsible for the modification shall be considered as manufacturer.

Installation

The luminaire must not permanently get in contact with aggressive media. Aggressive media might be washed out of the building material and might corrode the housing of the luminaire. In case of an unknown composition of the building material an analysis of the material should be made before installation. Aggressive media that is outgoing from the installation surface might also affect the luminaire. Thus an overuse of chemical cleansing agents in the surroundings of the luminaire should be avoided.

Installation

Dismantle luminaire from the recess housing. For this purpose undo screws in the stainless steel frame. Lift luminaire out of the recess housing. **For installation note the position of application** »arrow down«.

**A: Installation in fair-faced concrete**

Calibrate the mounting position. Fix centre-plate **Z** on sheathing. It supports centering and positioning of the recess housing and also protects it during building activity against soiling. The M6 sliding nuts suitable for the enclosed threaded rods allow a fixation of the recess housing on the sheathing. Place the recess housing over the centre-plate and fix it. If necessary seal. Cut out the cable entries according to the installed conduits. Lead conduits into the installation housing.

B: Flush mounted installation with plaster

Cut out the cable entries according to the installed conduits and lead conduits into the recess housing. Insert centre-plate **Z**. During building activity the centre-plate protects the recess housing against soiling. Fix centre-plate with enclosed threaded rods in the recess housing. If necessary seal. Wall in the recess housing into the intended position. Make sure that the leading edge of the recess housing is flush with the plaster surface.

C: Installation into wall panels:

When preparing a light-weight wall a support construction must be mounted on the backside to fix the recess housing. A recessed opening of 1235 x 115 mm with a minimum recessed depth of 125 mm is required. Cut out the recess opening and fix the recess housing.

Sécurité


Pour l'installation et l'utilisation de ce luminaire, respecter les normes de sécurité nationales. Le fabricant décline toute responsabilité résultant d'une mise en œuvre ou d'une installation inappropriée du produit. Toutes les modifications apportées au luminaire se feront sous la responsabilité exclusive de celui qui les effectuera.

Installation

Le luminaire ne doit pas être durablement en contact avec des substances corrosives. Des suintements corrosifs provenant des matériaux de construction peuvent altérer le boîtier. Si on ne connaît pas la nature des matériaux de construction, il faut les analyser avant l'installation du luminaire. Certaines substances corrosives pouvant également attaquer la surface du luminaire, il faut donc limiter l'utilisation de produits chimiques de nettoyage aux abords de l'appareil.

Installation

Démonter le luminaire du châssis de montage. Pour cela desserrer les vis du cadre. Extraire le luminaire du châssis de montage. **Vérifier la position d'utilisation** »flèche en bas«.

**A: Encastrement dans le béton brut**

Marquer le positionnement du boîtier d'encastrement. Fixer le gabarit de centrage **Z** sur le coffrage. Il sert à positionner le boîtier d'encastrement. Pendant la phase de construction il protège également le boîtier d'encastrement contre les salissures. Les écrous coulissants M6 pour l'installation des tiges filetées fournies permettent la fixation du boîtier d'encastrement sur le coffrage. Placer le boîtier d'encastrement sur le gabarit de centrage et fixer. Le cas échéant étancher. Découper les entrées de câble en fonction des gaines de passage de câble installées. Introduire les gaines de passage dans le boîtier d'encastrement.

B: Encastrement à fleur d'enduit

Découper les entrées de câble en fonction des gaines de passage de câble installées et introduire les gaines de passage dans le boîtier d'encastrement. Installer le gabarit de centrage **Z**. Pendant la phase de construction, il protège le boîtier contre les salissures. Le cas échéant fixer le gabarit de centrage avec les tiges filetées fournies dans le boîtier d'encastrement. Le cas échéant étancher. Maçonner le boîtier d'encastrement dans la position prévue. Dans ce cas veiller à ce que le bord antérieur du boîtier d'encastrement se trouve à fleur de l'enduit.

C: Encastrement dans les parois creuses:

Pendant la réalisation de la paroi creuse prévoir une pièce d'appui dans le fond pour fixer le boîtier d'encastrement. Une réservation de 1235 x 115 mm avec une profondeur minimale de 125 mm est nécessaire. Découper la réservation et fixer le boîtier d'encastrement.

fixture type: N3


winonaLED

Project: _____

Qty: _____

Type:

winline surface linear 103W damp/wet

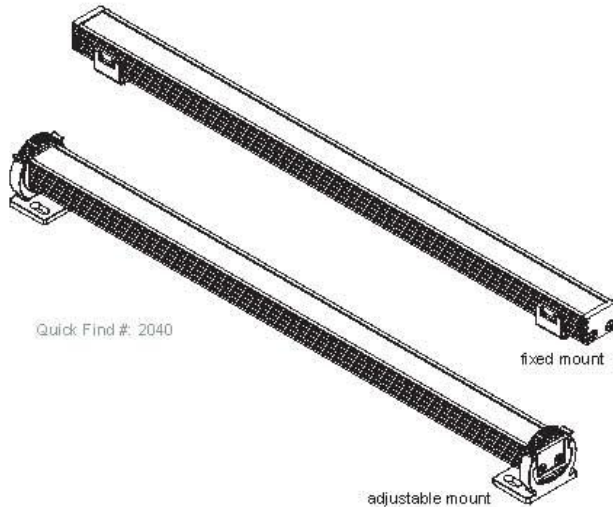

The **Winline 100 Series** are small scale linear LED luminaires and were designed to be the most powerful, reliable, and easiest to implement linear LED solution available. The model 103W is a high performance luminaire with robust construction suitable for exterior illumination.

Beam Spreads: Winline 103W is available in two beam spreads of 30 and 110 degrees. See page 4 for photometric data.

Color & Light Output: The 100 Series utilizes Nichia 123B white LEDs in five standard colors. Model 103W features (24) LEDs/ft.

Color	Model 103W
ANSI-2700K White	101 lm/ft
ANSI-3000K White	119 lm/ft
ANSI-3500K White	123 lm/ft
ANSI-4000K White	132 lm/ft
non-ANSI- 5000K White	166 lm/ft

Results based on BALL test 15460
110° beam spread
Note:
LM79 Tests- see page 4.

Power: Power consumption is 4.5W/ft. The Winline 100 series operates on 24VAC using Magnetic Transformers. A wide range of remote transformers are available in 120V and 277V primary.


Dimming: Used with remote mounted 24VAC magnetic transformers which can be dimmed with commonly available low voltage magnetic dimming equipment.

Mounting & Adjusting: Both fixed and adjustable mounts allow the 100 Series to be used almost anywhere. The installer locates and fastens the mount clip, runs power feed lines, connects the fixture's wire leads to the feed lines and snaps the fixture in place. The low profile fixed mount is only 1/8" high and the adjustable mount allows full 300 degree rotation around the centerline of the fixture. See pages 2-3 for more mounting and adjustment information.

Operating Temperature: Minimum and Maximum ambient air temperatures around this luminaire shall not exceed -22°F to 122°F (-30°C to 50°C). Any application of this product should also take into consideration air flow and ventilation to ensure performance and reliability.

Weight:

12" - .31 lbs	36" - .84 lbs
18" - .44 lbs	42" - .98 lbs
24" - .58 lbs	48" - 1.11 lbs
30" - .71 lbs	

Listing:  Winline 103W is ETL listed for wet location. Complies with UL Standard 2108

 **IP66**



Winona Lighting | 3760 West Fourth Street | Winona, MN 55987 | 800-328-5291 | www.winonalighting.com

Revision 5/25/10


Winline Surface Linear - WSL	WSL series
model 103 damp/wet - 103W	103W model
Total Run Length in Feet 103W offered in 6" increments starting at 12' <i>ex. 60FT = 60 foot run</i> or Preconfigured Run Length Code <i>see page 5</i> or To Be Determined <i>TBD when run length unknown</i>	48 run length code
30° - 30 110° - 110	110 beam spread
ANSI-binned 2700K - 27K ANSI-binned 3000K - 30K ANSI-binned 3500K - 35K ANSI-binned 4000K - 40K non-ANSI-binned 5000K - 50K	35K LED code
non-dimming 24 volt AC - ND24V dimming 24 volt AC - DM24V	ND24V voltage
fixed - F adjustable - A	A mount
natural (type III) anodized aluminum - NAA semi gloss black paint - SGB semi gloss white paint - SGW custom paint finish - CPF	NAA finish
none - X	X options
standard - STD modified - MOD	STD special
Describe Modification: <div style="border: 1px solid black; height: 80px; width: 100%;"></div>	



winline surface linear 103W wet

photometrics

30°



Maximum Candela = 538 Located At Horizontal Angle = 0, Vertical Angle = 5
 #1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)
 #2 - Vertical Plane Through Horizontal Angles (90-270)

BALL Test Report: 15403 Catalog Number: WSL-102-48-30-30K
 Description: 96 Nichia 1238 3000K LEDs / 48" Winline 102 Dry Luminaire / Extruded Aluminum Housing / Acrylic Lens

LM79 Data - Based on WSL102/30° Test Results


Color	Total Lumens	Lamp Watts	Lumens per Watt	CRI	Power Factor
ANSI-tilted 2700K	410	15.7	26.1	84.3	.97
ANSI-tilted 3000K	482	15.8	30.5	86.4	.97
ANSI-tilted 3500K	501	15.8	31.7	83.0	.98
ANSI-tilted 4000K	535	15.8	33.9	87.0	.98
not-ANSI-tilted 5000K	615	15.8	42.7	70.3	.98

Zone	Lumens	%Fixture	
0-30	263	52.3	
0-40	345	68.8	
0-60	444	88.4	
0-90	491	97.8	
Total Luminaire	0-180	502	100.0

Candlepower Distribution 3000K

Beam Angle	Horizontal Plane				
	0	22.5	45	67.5	90
0	531	531	531	531	513
5	538	530	514	510	494
10	536	516	465	432	405
15	535	498	382	297	271
20	530	425	248	178	154
25	518	336	163	105	89
30	500	245	99	64	56
35	462	167	65	44	38
40	407	110	45	32	30
45	329	76	33	26	25
50	244	53	25	23	21
55	164	39	20	18	18
60	101	29	18	17	18
65	58	21	15	17	17
70	30	17	14	17	18
75	15	12	13	15	17
80	7	11	12	14	15
85	2	7	11	12	12
90	0	5	8	11	11

110°



Maximum Candela = 208 Located At Horizontal Angle = 0, Vertical Angle = 0
 #1 - Vertical Plane Through Horizontal Angles (0-180) (Through Max. Cd.)

BALL Test Report: 15450 Catalog Number: WSL-103W-48-110-30K
 Description: 96 Nichia 1238 LEDs / 48" Winline 103 Wet Luminaire / Extruded Aluminum Housing / Acrylic Lens

LM79 Data - Based on WSL103W/110° Test Results

Color	Total Lumens	Lamp Watts	Lumens per Watt	CRI	Power Factor
ANSI-tilted 2700K	403	15.7	25.7	84.3	.97
ANSI-tilted 3000K	474	15.9	29.8	86.5	.97
ANSI-tilted 3500K	493	15.9	31.0	83.0	.97
ANSI-tilted 4000K	526	15.9	33.1	87.0	.97
not-ANSI-tilted 5000K	663	15.9	41.7	70.3	.97

Zone	Lumens	%Fixture	
0-30	160	33.7	
0-40	258	54.4	
0-60	423	89.2	
0-90	474	100.0	
Total Luminaire	0-180	474	100.0

Candlepower Distribution 3000K

Beam Angle	Horizontal Plane				
	0	22.5	45	67.5	90
0	208	208	208	208	208
5	210	210	207	210	203
10	208	207	205	205	201
15	203	202	198	198	194
20	196	196	192	189	186
25	187	186	179	178	173
30	177	176	167	164	163
35	163	163	154	152	150
40	150	148	140	138	135
45	133	128	124	117	111
50	114	107	104	92	87
55	92	87	81	68	62
60	72	67	68	48	42
65	51	48	38	29	24
70	30	32	24	18	14
75	16	19	11	8	6
80	8	8	3	3	3
85	0	1	0	0	0
90	0	0	0	0	0

Winline

lighting facts^{CM}

A Program of the U.S. DOE

Light Output (Lumens) **474**

Watts **15.9**

Lumens per Watt (Efficacy) **30**

Color Accuracy **86**

Color Rendering Index (CRI)

Light Color **3091 (Bright White)**

Correlated Color Temperature (CCT)

2700K 3000K 4500K 6500K



All results are according to IESNA LM-79-2008: Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: 84Q4-2B4XVA
 Model Number: WSL-103W-4-110-30K
 Type: Other



08.11 · Technische Änderungen vorbehalten · Technical amendments reserved · Sous réserve de modifications techniques

BEGA Lichttechnische Spezialfabrik
Hennenbusch · D - 58708 Menden**BEGA****Gebrauchsanweisung**
Instructions for use
Fiche d'utilisation**Wandleuchte**
Wall luminaire
Applique IP 65**6602****Anwendung**

Wandfluter mit zweiseitigem Lichtaustritt.
Für Beleuchtungs- und Gestaltungsaufgaben in der Lichtarchitektur.
Das nach unten gerichtete Licht ist für die Beleuchtung der Wand und der davor liegenden Flächen bestimmt.
Das nach oben gerichtete Licht wird mit Hilfe einer optischen Linse stark gebündelt und dient vornehmlich gestalterischen Zwecken.
Für Innen- und Außenbereiche.

Application

Wall washer with two-sided light output.
This luminaire can solve a host of lighting and design tasks in architecture.
The light directed downwards is intended to illuminate the wall and the horizontal surface in front of it.
The light directed upwards is very highly concentrated by an optical glass lens and primarily serves design purposes.
For interior and exterior lighting application.

Utilisation

Lèche-muraille à diffusion bilatérale.
Pour des applications de l'éclairage architectural et décoratif.
La lumière dirigée vers le bas est destinée à l'éclairage des murs et des abords immédiats devant le mur.
La lumière dirigée vers le haut est très concentrée par une lentille. Il en résulte un faisceau extrêmement pincé pour effet décoratif.
Pour l'intérieur et l'extérieur.

LampeHalogen-Metaldampflampe
HIT-CE 70 W · G 12Osram: HCI-T 70 W /... 7300 lm
Philips: CDM-T 70 W /... 6600 lm

Bitte beachten Sie die Betriebshinweise der Lampenhersteller.

LampMetal halide discharge lamp
HIT-CE 70 W · G 12Osram: HCI-T 70 W /... 7300 lm
Philips: CDM-T 70 W /... 6600 lm

Please note the lamp manufacturers' operating instructions.

LampeLampe aux halogénures métalliques
HIT-CE 70 W · G 12Osram: HCI-T 70 W /... 7300 lm
Philips: CDM-T 70 W /... 6600 lm

Veuillez respecter les instructions des fabricants de lampes.



Produktbeschreibung

Leuchte besteht aus Aluminiumguss, Aluminium und Edelstahl
2 Sicherheitsgläser
Silikondichtung
Plankonvexlinse aus Pressglas
Reflektor aus eloxiertem Reinst-Aluminium
Montageplatte mit 3 Befestigungsbohrungen
6,5 mm · Teilkreisdurchmesser 122 mm
2 Leitungseinführungen zur Durchverdrahtung der Netzanschlussleitung
bis ø 10,5 mm max. 3 x 1,5⁰
Anschlussklemme 2,5⁰
Schutzleiteranschluss
Fassung G 12
Vorschaltgerät 230/240/250 V ~ 50 Hz umschaltbar · Versandschaltung 230 V
Zündgerät mit Timer
Befestigungsmöglichkeit für Kompensationskondensator
Schutzklasse I
Schutzart IP 65
Staubdicht und Schutz gegen Strahlwasser
▽ Zeichen – Leuchte ist für die Montage auf normal entflammaren Befestigungsflächen geeignet
 – Sicherheitszeichen
 – Konformitätszeichen
Gewicht: 6,9 kg

Product description


Luminaire made of aluminium alloy, aluminium and stainless steel
2 safety glasses
Silicone gasket
Plano-convex lens made of pressed glass
Reflector made of anodised pure aluminium
Mounting plate with 3 fixing holes 6.5 mm
Pitch circle diameter 122 mm
2 cable entries for through-wiring of mains supply cable up to ø 10.5 mm max. 3 x 1.5⁰
Connecting terminal 2,5⁰
Earth conductor connection
Lampholder G 12
Ballast 230/240/250 V ~ 50 Hz tapped · Dispatch connection 230 V
Ignitor with timer
Prepared for PF correction capacitor
Safety class I
Protection class IP 65
Dust tight and protection against water jets
▽ Symbol – Luminaire is suitable for mounting on normal inflammable fixing surfaces
 – Safety mark
 – Conformity mark
Weight: 6.9 kg

Description du produit

Luminaire fabriqué en fonte d'aluminium et acier inoxydable
2 verres de sécurité
Joint silicone
Lentille plan-convexe en verre pressé
Réflecteur en aluminium pur anodisé
Contre plaque avec 3 trous de fixation 6,5 mm sur un cercle de ø 122 mm
2 entrées de câble pour branchement en dérivation d'un câble de raccordement jusqu'à ø 10,5 mm max. 3 x 1,5⁰
Bornier 2,5⁰
Raccordement de mise à la terre
Douille G 12
Ballast 230/240/250 V ~ 50 Hz permutable · Branchement d'usine 230 V
Amorceur temporisé
Fixation prévue pour condensateur de compensation
Classe de protection I
Degré de protection IP 65
Étanche à la poussière et protégé contre les jets d'eau
▽ Signe – Luminaire approprié à l'installation sur des surfaces de fixation normalement inflammables
 – Signe de sécurité
 – Signe de conformité
Poids: 6,9 kg

fixture type: P4-16

avenue® d

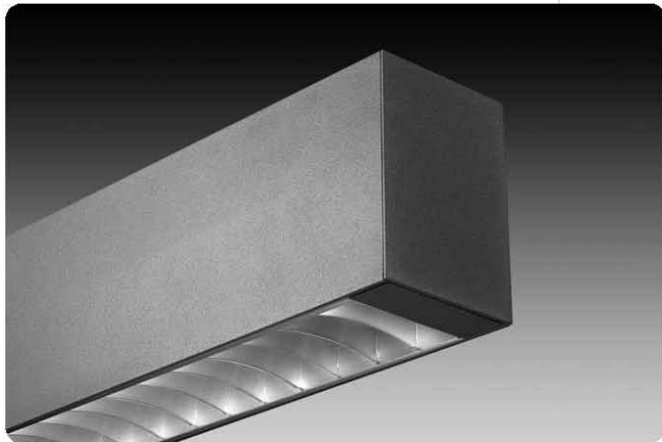

features

Extruded aluminum, suspended direct/indirect or direct linear T5/T5HO fluorescent luminaire.


3" aperture rectilinear profile creates sleek aesthetic.

Avenue® D makes an exceptional aesthetic statement in conference rooms, private offices, reception areas or other high-end applications.

shielding options



concave parabolic louver



solid regress



flush satin lens





corrugated regress

sensor options




daylight/occupancy sensor


dimensional data



flush lens



regress (direct only)



asymmetric (indirect only)

4' example

fluorescent only




fluorescent with sensor



note: Sensors may be installed in any module length. Sensor location in run must be specified. Sensors are placed on opposite end of power feed. Consult factory for additional placement options

performance

Solid Regress:
1-Lamp T5
82% Efficiency
818 cd @ 25°



Visit focalpointlights.com for complete photometric data.

January 2011 D

fixture type: S1




Delta Light USA
 4850 West Prospect Road, Fort Lauderdale, FL 33309
 T: (954) 677-9800 F: (954) 677-1007
 www.deltalight.us

nfm

Jeti Plano H 160 C

JETI PLANO H 160 C
271 54 160
 INCL 4 X CABLE SUSP. SINGLE AUTO. 9.84ft
 INCL 1 X POWER CABLE
 23X(13 / 120-277V / 60Hz / 1 X 1-ELECT. BALLAST
 1 X T5-R 55W
 15.4 IP20

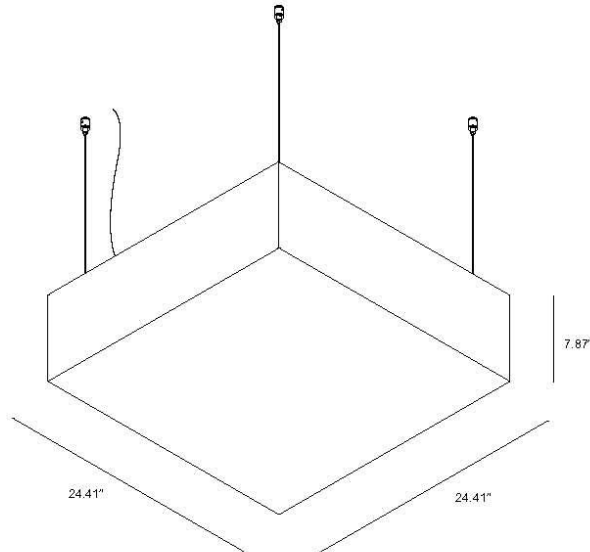

LEGEND	
◊ = A - Aluminum Gray Powder Coat	◊ = G - Grey Brown
◊ = ALU - Brushed Aluminum	◊ = M - Gold
◊ = ANO - Anodized Aluminum	◊ = MMAT - Matte Gold
◊ = AP - Aluminum Pure (Soft Sandblasted)	◊ = PRIM - Primer
◊ = B - Black	◊ = RAL - RAL Powder Coat
◊ = C - Chrome	◊ = W - White (RAL 9003)
◊ = CMAT - Matte Chrome	◊ = BAP - Parabolic Louver
◊ = INGX - Stainless Steel	◊ = SBL - Sandblasted Lens (Glass)
	◊ = ESG - Safety Glass

IMPORTANT

See further for US installation instruction sheets and installation kits, such as:

- Back Plate
- Stealth Kit
- EMT Connection

FOR ARCHITECT USE

PROJECT NAME: _____ FIXTURE TYPE: _____







SPECIFIER NAME: _____ DATE: _____



Delta Light USA
 4850 West Prospect Road, Fort Lauderdale, FL 33309
 T: (954) 677-9800 F: (954) 677-1007
 www.deltalight.us

**BACKPLATE
 INSTALLATION INSTRUCTIONS**

01. REMOVE UNIVERSAL MOUNTING RING FROM FIXTURE AND ATTACH TO J BOX
02. MAKE THE ELECTRICAL CONNECTION INSIDE JUNCTION BOX
03. ATTACH FIXTURE BACKPLATE TO THE UNIVERSAL MOUNTING RING
04. PLACE CABLE SUSPENSION
05. LOOSEN SCREWS
06. REMOVE COVER
07. (RE)PLACE LAMP
08. PLACE COVER
09. FASTEN SCREWS
10. SWITCH ON

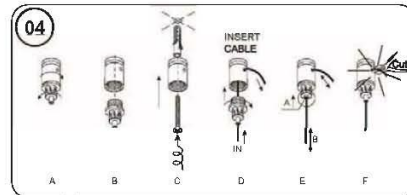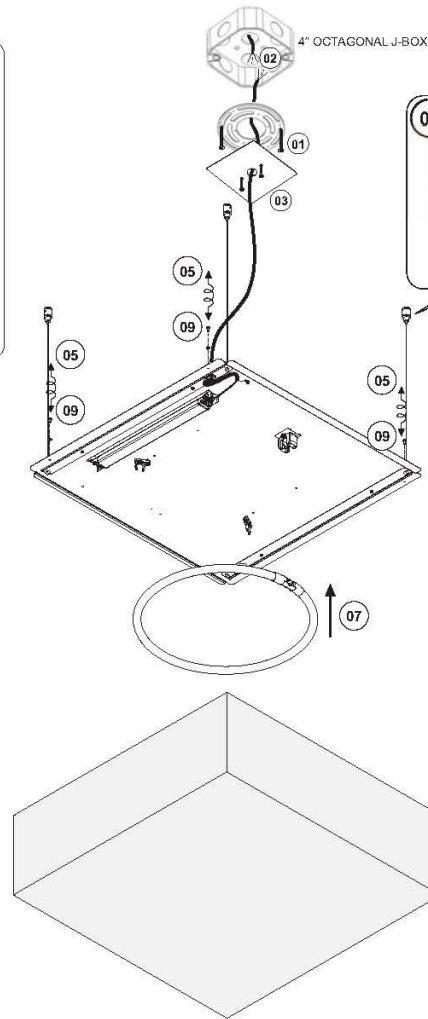

fixture type: Z1

Small scale floodlights

Housing: One piece die-cast aluminum with integral cooling fins.
Enclosure: Lamp enclosure/optical system consists of a die-cast aluminum clamping ring, clear tempered glass. Fully gasketed for weather tight operation in any mounting orientation using a molded silicone rubber gasket.
Mounting: Provided with two piece die-cast aluminum canopy supplied with universal mounting bracket for direct attachment to 3½" or 4" octagonal wiring box. Die-cast aluminum swivel.
Electrical: H.I.D. lampholders are G8.5, bi-pin with nickel plated contacts. Ballasts are integral and electronic, universal voltage 120V through 277 V.
Finish: These luminaires are available in four standard BEGA colors: Black (BLK); White (WHT); Bronze (BRZ); Silver (SLV). To specify, add appropriate suffix to catalog number. Custom colors supplied on special order.
UL listed, suitable for wet locations. Protection class: IP65.

Type:
 BEGA Product:
 Project:
 Voltage:
 Color:
 Options:
 Modified:



Floodlights with mounting canopy												
Lamp	β	Lumen	A	B	C	D	265	130	131	132	316	316
7514MH 1 39W T4 G8.5 MH	20°	3300	6½	11½	7¾	4¼						

180° glare shield
 Color effect filters
 Exchangeable lenses
 Wide beam
 Flat beam
 β =Beam angle

BEGA-US 1000 BEGA Way, Carpinteria, CA 93013 (805) 684-0533 FAX (805) 566-9474 www.bega-us.com
 ©copyright BEGA-US 2010 Updated 2/10



appendix b – ballast and driver cut sheets

fixture type: A1, D1



IDA-128-D@277V	
Brand Name	ROVR
Ballast Type	Electronic Dimming
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	120-277
Input Frequency	50/60 HZ
Status	Active

Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (*F/C)	Input Current (Amps)	Input Power (Watts) (min/max)	Ballast Factor (min/max)	MAX THD %	Power Factor	Lamp Current Crest Factor	B.E.F.
F14T5	1	14	50/10	0.07	06/19	0.03/1.00	10	0.98	1.7	5.26
F21T5	1	21	50/10	0.09	06/25	0.03/1.00	10	0.98	1.7	4.00
* F28T5	1	28	50/10	0.12	07/32	0.03/1.00	10	0.98	1.7	3.13
F28T5/ES (25W)	1	25	50/10	0.11	07/30	0.03/1.00	10	0.98	1.7	3.33

Wiring Diagram

Diag. 55B

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	In.	cm.
Black	0	0
White	0	0
Blue	0	0
Red	0	0
Yellow	0	0
Gray	0	0
Violet	0	0

	In.	cm.
Yellow/Blue	0	0
Blue/White	0	0
Brown	0	0
Orange	0	0
Orange/Black	0	0
Black/White	0	0
Red/White	0	0

Enclosure

Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
16.70"	1.18"	1.00"	16.34"
16.7/10	1.9/50	1	16.17/50
42.4 cm	3 cm	2.5 cm	41.5 cm

Revised 01/18/2011



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PHILIPS LIGHTING ELECTRONICS N.A.
 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
 Tel: 800-322-2086 · Fax: 888-423-1862 · www.philips.com/advance
 Customer Support/Technical Service: 800-372-3331 · OEM Support: 666-915-5886

fixture type: I1

Nextek Power Systems

Nextek Power Server Module

Model 1600-C2 DC Power Supply


Model 1600-C2-24V ALT DC Power Supply

16 Channel, Class 2, 24V DC Output



Power Server Module

- Nextek's **Power Server Module** converts 208 or 240V AC power to 24V DC through 16 individual Class 2 outputs. The Power Server Module has a wireless remote control and monitoring system.
- The **system advantage** is that the Power Server Module provides a safe, low-voltage DC distribution system that allows quick plug-and-play, energy efficient and individually controllable Direct Current (DC) lighting and other loads.
- The **patented triangular design** of the Power Server Module makes for a clean fit into a suspended ceiling grid for ease of installation and removal of ceiling tiles.

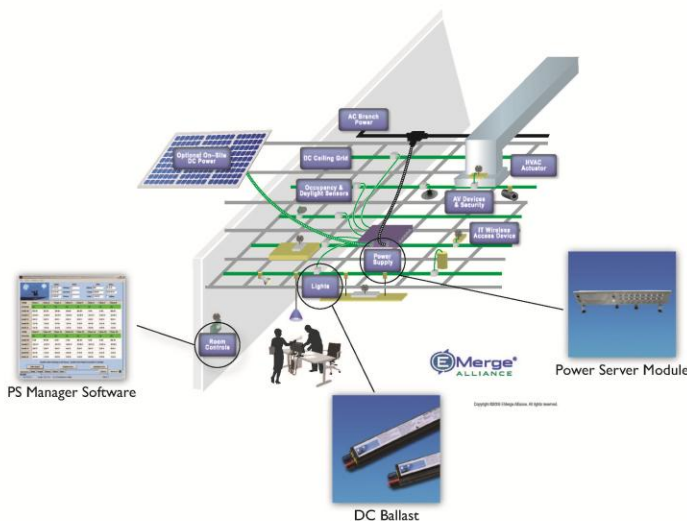

Why A Power Server Module?

Over the last 50 years, we have moved steadily from an electro-mechanical to an electronic world—a world where most of our electrical devices are driven by DC, and where most of our non-fossil fuel energy sources (such as photovoltaic cells and batteries) deliver their power as a DC supply.

The cost of Alternating Current (AC) - Despite these changes, the vast majority of today's electricity is still generated, transported and delivered as AC. Converting AC to DC and integrating alternative DC sources with the mainstream AC supply are inefficient and expensive activities that add significantly to capital costs and lock us all into archaic and uncompetitive utility pricing structures.

Take advantage of DC efficiency - Nextek's AC/DC integration technology represents a breakthrough in on-site electrical management, combining the availability of AC power with the quality and efficiency of a DC supply.



Why Class 2?

Class 2 circuits are power limited to 100 Volt-Amperes (Watts) and can be installed using more relaxed Class 2 wiring methods. A Class 2, 24 Volt DC circuit provides acceptable protection from electrical shock and fire initiation.

Clean, Efficient and Less Expensive Power

- Easy conversion of AC lighting fixtures to DC-powered systems
- Easy conversion of AC grid power into DC power for commercial building applications
- Highly efficient management of peak loads
- Complete continuity of supply through the seamless integration of available rechargeable batteries
- Complete continuity of alternative energy sources such as PV, micro turbines and fuel cells

In Addition – Unlike conventional PV installations utilizing DC to AC inverters that must be shut down in the event of a grid power failure (anti-islanding), the Nextek system can stay on and continue to support the DC loads by combining all available DC sources.



Nextek Power Systems
461 Burroughs Street
Detroit, Michigan 48202


Tel: 313-887-1321
Toll free: 1 (877) 24-VOLTS
Fax: 313-887-9433

www.nextekpower.com
info@nextekpower.com

Nextek Power Systems

Nextek Power Server Module,
Model 1600-C2 DC Power Supply
Model 1600-C2-24V ALT DC Power Supply
16 Channel, Class 2, 24V DC Output

POWER SERVER MODULE SPECIFICATIONS:
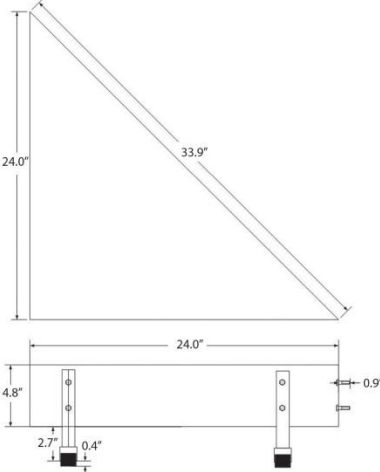
<p>STANDARDS / SPECIFICATIONS</p>	<ul style="list-style-type: none"> • UL2043 – Fire Test for Heat and Visible Smoke Release for Discrete Products and Their Accessories Installed in Air-Handling Spaces • UL1310 – Class 2 Power Units • UL1012 – Power Units Other Than Class 2 • UL2577 – Suspended Ceiling Grid Low Voltage Lighting Systems (Pending) • Emerge Alliance® Registered • ZigBee® Alliance Certification (Pending) • RoHS compliant
<p>MECHANICAL</p>	<ul style="list-style-type: none"> • Weight <ul style="list-style-type: none"> - 21.1 pounds • Mounting Orientation <ul style="list-style-type: none"> - Flat horizontal surface – using rubber feet - Ceiling grid – using plastic grid interconnects • Audible Noise <ul style="list-style-type: none"> - Less than 15 dBA • Operational Environmental Limits <ul style="list-style-type: none"> - Temperature Range 0°C – 49°C - Humidity: 90% RH non-condensing - Vibration: Low-frequency 10 – 55 Hz • Storage Environmental Limits <ul style="list-style-type: none"> - Temperature Range -40°C – 60°C - Humidity: 95% RH non-condensing (transport and storage in protective container) - Vibration: Low-frequency 10 – 55 Hz • Construction <ul style="list-style-type: none"> - Meets NEMA Type I specifications - Made of 20 gauge steel - Steel manufactured in U.S.A. • Installation <ul style="list-style-type: none"> - When installed in a suspended ceiling, installation requires a minimum of 12" from the top of the ceiling grid to the deck. 
<p>ELECTRICAL</p>	<ul style="list-style-type: none"> • Input Power <ul style="list-style-type: none"> - 208 – 240 VAC single phase, 13.5 A max., 50/60 HZ • Output Per Channel <ul style="list-style-type: none"> - 24 VDC ± 5% - 95 W maximum current limited to 3.96 A continuous - Rated impulse current – 80 A for .2 mSec • Efficiency <ul style="list-style-type: none"> - Quiescent power = 7W - 90% @ 240 VAC input; 1500 W output • Wireless Communication <ul style="list-style-type: none"> - Provided through a ZigBee® module series (XBee Series2®) and a Nextek Power Systems software interface (PS Manager). See PS Manager manual for functionality and usage. • ALT Input Power <ul style="list-style-type: none"> - 24.0 – 24.5 VDC, 65 A max. - Only included in Model 1600-C2-24V ALT
<p>STATUS INDICATORS</p>	<p>System status shall be indicated by 4 different types of LED indicators on the Power Server Module as follows:</p> <ul style="list-style-type: none"> • Power LED (bottom of Power Server Module) • System Status LED (bottom of Power Server Module) • ZigBee Association LED (bottom of Power Server Module) • Channel Status LEDs (front of Power Server Module) <p>In addition to the status indicators, control and monitoring software is available to provide additional functionality.</p>

While Nextek Power Systems has made every reasonable effort to ensure the accuracy of the information in this catalog, Nextek Power Systems does not guarantee that it is error free, nor do they make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. Nextek Power Systems, Inc. reserves the right to make any adjustments to the information contained herein at any time without notice. The specifications in this catalog are for reference purposes only and are subject to change without notice. Consult Nextek Power Systems for the latest design specifications. All trademarks are either the exclusive property of Nextek Power Systems, Inc. or other companies. Copyright 2010 by Nextek Power Systems, Inc. in the United States and other countries throughout the world.

fixture type: I2

www.sylvania.com

OPTOTRONIC®

Electronic 10.5V DC & 12V DC LED Power Supplies



OPTOTRONIC power supplies are compact and electronically stabilized. The wide range of input voltage on select models, from 100 to 277V AC, enables worldwide use on single-phase AC power lines. These supplies are available in 10.5Vdc and 12Vdc outputs and are protected against open circuit, short circuit, overload and overheating conditions.

Key Features & Benefits

- Damp rated designs available for use in outdoor applications
- Wide input voltage range: 100-277V AC (select models)
- Broad ambient temperature range for use in extreme application conditions
- Electronically stabilized output voltage with low line ripple
- Short circuit, overload and overheat protection for sustained performance
- High power factor and efficiency
- Compact enclosures for variety of applications and fixture designs
- UL Class 2 output for safe operation
- Exceptional line and load regulation

Product Offering

Ordering Abbreviation	Output Wattage	Output Voltage
OT6/100-120/10CE	6	10.5
OT20/120-240/10E	20	10.5
OT25/120/10	25	10.5
OT50/120-277/10E	50	10.5
OT10/120-240/12	10	12
OT25/120-277/12	25	12
OT60/120-277/12	60	12

LED power supplies compatible with: 10.5V or 12V LED modules

Application Information

Applications

- Ambience lighting inside furniture
- Backlighting
- Compact installations
- Effect lighting
- General lighting
- Low & medium power applications
- Panel lighting
- Path and roadway marking
- Signs
- Step and seat marking
- Wall washing

Specifications and Certifications

UL OPTOTRONIC LED power supplies are UL1310 and UL48 Recognized for the US and Canada Class 2 Unit.



OT6, OT25 and OT50 are CSA approved.



RoHS compliant (except for Item# 51505)

This light source meets restrictions on hazardous substances.

FCC 47CFR Part 15 compliant

ECS049R9 4/10

SEE THE WORLD IN A NEW LIGHT






Electrical Specifications

LED-277A-0700C-28-F-O	
Brand Name	XITANIUM
Driver Type	Electronic
Input Voltage	277
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

Max. Output Power (W)	Output Voltage (V)	Output Current (A)	Operating Temp. Range (°F/°C)	Input Current at 277V (A)	Max. Input Power (W)	Inrush Current (A _{pk} /μs)	Max. THD (%)	Min. Power Factor	Surge Protection (KV)	Weight (Lbs)	IP Rating
20	2.8~28.0	0.7	-40°~140°F (-40~60°C)	0.09	24	-	20	0.9	2.0	0.3/135	IP66

Wiring Diagram

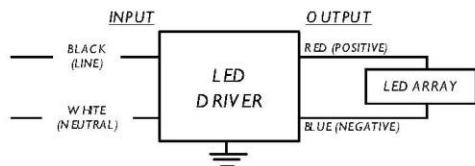

Input, Output and 0-10V Dimming use lead-wires. Lead-wires are 18AWG 105C/600V solid copper

Standard Lead Length

	in.	cm.
Black	6	15
White	6	15
Blue	6	15
Red	6	15
Gray	6	15
Violet	6	15

Maximum Wiring Distance (at full load)

Wire Size (AWG)	Distance (feet)
26	8
24	13
22	21
20	34
18	54
16	85
14	137
12	210
10	357

Revised 12/10/2009

Enclosure



	in. (mm)
Case Length	5.2 (132)
Case Width	1.3 (34)
Case Height	1.0 (25)
Mounting Length	4.8 (122.4)
Mounting Width	1.0 (24.8)
Overall Length	5.2 (132)



UL Class 2
E220165



7310_S-000
3426-32

PHILIPS LIGHTING ELECTRONICS N.A.
 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
 Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
 Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

fixture type: M1

GE Consumer & Industrial Lighting



70, 100 and 150 Watt Slim Line Electronic HID Ballast

GE's line of ultra cool UltraMax® eHID electronic ballasts provide up to 70% energy savings and 2-4 times the life of standard halogen. End users get the cost savings and the advantages offered in meeting strict watts per square foot requirements with these systems. UltraMax® eHID is a high energy efficiency ballast that uses less wattage to provide full light output.

The UltraMax® multi-volt slim line eHID ballast is designed for recessed can down lighting and outdoor landscape lighting requiring high efficiency energy savings, long life, cool ballast operation and maximum performance with ceramic metal halide lamps.

You can count on GE to answer your lamp and ballast questions at 1-888-GEBALLAST.

Performance Features

- 15-22% energy savings when replacing an HID electromagnetic ballast with UltraMax® eHID. Reduce energy costs up to \$100 per fixture* over the 5-year warranty period.
- Over 90% energy efficient ballasts.
- Low watts per square foot and long lamp life provide lower cost of ownership compared to halogen.
- Low frequency square wave electronic ballast maximizes ceramic metal halide performance and lamp life.
- Industry standard mini-square can size.
- Ultra cool operation ensures maximum ballast life and maintained warranty.
- 2% output regulation over accepted ANSI lamp voltages reduces visual flicker and maintains consistent lamp color. EM lag ballasts have up to 20% change in output power over the same lamp variation range which results in an increase in power (watts) to the lamp as the voltage increases over the life of the lamp.

Applications

- Replacement of electromagnetic HID ballasts.
- Replacement of 100W halogen or higher.
- High ceiling heights requiring high point source lumens.
- Any recessed down light application where watts per square foot are critical.



Benefits of Electronic Systems

System-Recessed Downlight @ 277 V	Ballast	Performance				% Savings (W)
		Initial Lumens	Watts	LPW	Lamp Life (hrs)	
CMH70PAR38SP	70W HX-HPF Magnetic UltraMax eHID 70W	4800 4800	94 77	51 62	- 10000	-22%
CMH100PAR38SP	100W HX-HPF Magnetic UltraMax eHID 100W	6500 6500	129 107	50 61	- 10000	-21%
MXR150/C/U/MED/O	150W CWA Magnetic UltraMax eHID 150W	12000 12000	189 164	63 73	- 15000	-15%

UltraMax® 100W eHID ballasts provide 22% energy savings and improvement in Lumens Per Watt when replacing a 100W HX-HPF electromagnetic ballast.



imagination at work

* @ \$.10 kwh over 5-year warranty period of ballast. Ballasts and system specs listed on back.

Specifications: 70, 100 and 150 Watt Slim Line Electronic HID Ballast

Product Code	Description	ANSI Designation	Line Voltage	System Watts	Nominal Current (Amps)	Power Factor	THD%	Ballast Efficiency
87546	GEMH70-SLF-MV	M98, M/C143	120	77	.66	> 99%	4.9%	91%
			277	77	.30	>97%	7.7%	91%
87561	GEMH100-SLF-MV	M90, M/C140	120	110	.93	> 99%	4.7%	91%
			277	107	.41	> 99%	7.8%	93.5%
87576	GEMH150-SLF-MV	M102, M/C142	120	167	1.44	> 99%	4.2%	90%
			277	164	.62	> 99%	10.6%	91.5%

Specifications

- Line Voltage 120VAC, +/- 10%, 50-60Hz
- Short Circuit Protection
- End of Life lamp protection
- Low Frequency Square Wave
- Lamp operating frequency: 130Hz
- OCV - 500 Vrms (Vpk-4.0kV)
- Lamp current crest factor <1.4
- Remote mounting distance = 8ft (18AWG)
- Meets ANSI Standard C62.41-1991
- ANSI approved pulse starting ensures high voltage reliable starting
- Bottom leads with mounting studs


- Meets FCC Part 18 (Class A) for EMI and RFI, Non-Consumer Limits
- UL C-UL 1029 listed, UL listed suitable for recessed use
- RoHS Compliant (Reduction in Hazardous Substances)
- Durable metal housing
- Inherent Thermal Protection
- Minimum Starting Temp: 0F, -18C
- 10 +2"/-0" lead wires 18AWG 200C
- Max Case Temp 70-100W -194F/90C 3yr, 167F/75C 5yr
150W - 185F/85C 3yr @ 277V
176F/80C 3yr @ 120V
158F/70C 5yr

Lamp Operation

M98, M/C143, M90, M/C140, M102, M/C142 Pulse Arc or Ceramic Metal Halide lamps

Packaging

2.01 lbs each

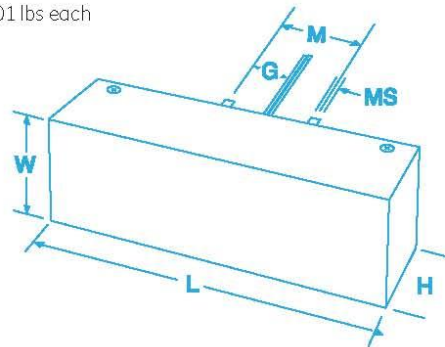

The Power Behind the Power

UltraMax® eHID electronic ballasts are custom-manufactured to our demanding Six Sigma specifications for dependable performance with 100% burn in all ballasts at the factory to ensure every ballast is ready to go on-site.



Case Dimensions

Length	Width	Height	Mount Offset	Mount Length	Mount Width	Mount Slot
(L)	(W)	(H)	(G)	(M)	(X)	(MS)
7.28 in	2.58 in	2.2 in	1 in	.43 in	-	-
185 mm	65.5 mm	56 mm	25.4 mm	50.8 mm	-	#8-32 x .43

Transforming
the **POWER**
of light™

National Customer Service Center
1-888-GEBALLAST (432-2552)

Product Code: 89550
UltraMax® is a registered trademark of General Electric Company.
©2006 General Electric Company

fixture types: M2

CFL Biax® Ballasts

Product Code	Description	Type	LEDs	Input Volts	Input Watts	Ballast Factor	System Lumens	System RPM	Nominal Line Amps	Power Factor	Starting Temp
75948	GEC140MAK-A	F40/308R/ZG11	1	120	38	0.90	2835	75	0.32	>0.99	0F
				277	38	0.90	2835	75	0.14	>0.95	0F
		F40/288R/ZG11	1	120	34	1.00	2800	82	0.29	>0.99	0F
				277	34	1.00	2800	82	0.13	>0.95	0F
		F40/258R/ZG11	1	120	31	1.00	2600	84	0.25	>0.99	0F
				277	31	1.00	2600	84	0.12	>0.90	0F
71435	GEC2MMAK-A	F40/308R/ZG11	2	120	69	0.90	5670	82	0.58	>0.99	0F
				277	68	0.90	5670	83	0.25	>0.95	0F
		F40/288R/ZG11	2	120	63	1.00	5600	89	0.54	>0.99	0F
				277	62	1.00	5600	90	0.23	>0.95	0F
		F40/258R/ZG11	2	120	58	1.00	5200	90	0.50	>0.99	0F
				277	57	1.00	5200	91	0.21	>0.90	0F
71436	GEC340MAK-A	F40/308R/ZG11	3	120	100	0.90	8505	85	0.86	>0.99	0F
				277	99	0.90	8505	86	0.36	>0.99	0F
		F40/288R/ZG11	3	120	93	1.00	8400	90	0.79	>0.99	0F
				277	91	1.00	8400	92	0.33	>0.95	0F
		F40/258R/ZG11	3	120	85	1.00	7800	92	0.73	>0.99	0F
				277	84	1.00	7800	93	0.31	>0.95	0F
71437	GEC240MPS-A	F40/308R/ZG11	2	120	70	0.90	5670	81	0.59	>0.99	0F
				277	69	0.90	5670	82	0.25	>0.95	0F
		F40/288R/ZG11	1	120	42	1.04	3276	78	0.36	>0.99	0F
				277	42	1.04	3276	78	0.17	>0.95	0F
		F40/258R/ZG11	1	120	36	1.22	3172	88	0.30	>0.99	0F
				277	36	1.22	3172	88	0.14	>0.95	0F

Transforming the **POWER** of Light™ GE National Customer Service Center 1-888-GEBALLAST (432-2552)

For product specifications and application information, please consult GE's Website: www.gelighting.com

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.

11/2009 Printed in USA

GE Consumer & Industrial Lighting

UltraMax® Instant Start & UltraStart® Programmed Start High Lumen CFL Biax® Ballasts



Featuring the Extreme Efficiency Solution for Compact 2x2 Fixtures...

GE Ultra Watt-Miser® 25W Biax® System



imagination at work



High Lumen Biax® High Efficiency CFL Ballasts

GE has developed a line of High Lumen Biax® CFL ballasts that incorporate all the benefits of GE's UltraMax® instant start and UltraStart® programmed start T8 and T5 ballasts. These high efficiency (>90%) ballasts along with GE's 25W High Lumen Biax® 104 Lumen Per Watt Lamp are GE's highest efficient fluorescent system for compact spaces typical in 2x2 ft. fixtures. 25W High Lumen Biax® lamps are direct replacements for F40/30 watt CFL lamps on standard instant start ballasts. These lamps can be operated on standard instant start ballasts or GE's UltraStart® programmed start ballast designed for the 25W.

The GE UltraStart® Watt-Miser® Biax® Lamp and Ballast System Advantage

- 14 watts, 20% lower system watts than standard 2-lamp, F40/30 watt CFL systems
- Operates lamps in parallel (which means if one lamp fails, the other lamps remain on) - significantly reduces lamp maintenance costs
- Extends Lamp Life to a 36,000 hours @ 12 Hr Start with an Extended 3 Year GE Express System Warranty

GE UltraStart® Biax® programmed start ballasts use a control circuit to apply very precise cathode heat to ensure lamp cathodes have reached optimum temperature during lamp starting. Precise starting reduces the amount of cathode degradation associated with each start and increases lamp life significantly. After starting the lamps, continuous cathode cutout technology (CCC) is applied - which eliminates wasted power to the lamps, resulting in high efficiencies.

GE's Highest Efficient Fluorescent System for 2x2 ft. Fixtures

Standard 2 Lamp T12U



Mean Lumens = 4,791
Watts = 90W
Mean LPW = 53
Life = 14,000 hrs

25W Watt-Miser® Lamp



Mean Lumens = 4,940
Watts = 60W
Mean LPW = 82
Life = 20,000*
Savings = **-\$18/fixture**

UltraStart® Watt-Miser®



Mean Lumens = 4,940
Watts = 50W
Mean LPW = 98
Life = 36,000
Savings = **-\$20.40/fixture**

Environmental Awareness

GE's commitment to create products that help our customers improve their environmental and operating performance. GE Biax® ballasts are high-efficiency, energy-efficient and RoHS compliant.

GE's UltraStart® Biax® programmed start and GE UltraMax® Biax® Instant Start ballasts are among the highest energy-efficient ballasts available and contribute to significant reductions in energy consumption and the curbing of greenhouse gas emissions.

RoHS compliant:

(European Directive 2002/95/EC on the Restriction of Hazardous Substances) states that (beyond certain limited emissions) electrical and electronic products shall not contain lead, cadmium, mercury, hexavalent chromium, polybrominated biphenyls (PBBs) or polybrominated diphenyl ethers (PBDEs). GE's Biax® ballasts use lead-free solder and other environmentally preferable materials that meet the RoHS directive. RoHS-compliant ballasts are GE's commitment to helping our customers meet their disposal needs now, and in the future.


GE encourages customer awareness on the importance of reducing hazardous materials and getting ahead of complying with environmental trends. Look for the RoHS-compliant mark on all GE Biax® and other GE ballasts.



UltraMax® & UltraStart® Biax® Ballasts Features and Benefits

- GE UltraStart® programmed start ballasts for use with sensors, short burn cycles or where lamp life is a primary concern
- GE UltraStart® instant start ballasts for use in long (> 3 hr) lamp cycles
- High-Efficiency, Energy Savings - High efficiency components, low losses & GE UltraStart® ballasts complete cathode cutout, maximizes energy savings
- Multi-Voltage Technology - Simplify installation. Adapts automatically to any voltage from 108V to 305V
- Anti-Striation Control - Reduces maintenance issues caused by striating lamps
- End of Life Lamp Protection
- Lower Maintenance Costs with Parallel Lamp Operation - If one lamp fails, the other lamps remain lit. This can reduce spot relamping by 50%, or extend group relamping by up to 15%.
- Fast Starting Time - GE UltraStart® ballasts start in less than 700 milliseconds compared with standard programmed start >1.1 seconds. This is an important feature when using sensors. GE UltraStart® ballasts fast starting time eliminate the traditional PB ballast delay of waiting for the lights to turn on.
- Auto-Reset - Automatically resets after lamp replacement and withstands temporary losses in power typical with backup lighting systems
- Complies with RoHS Restrictions of Hazardous Materials Standards - Environmentally conscious

Technical Specifications

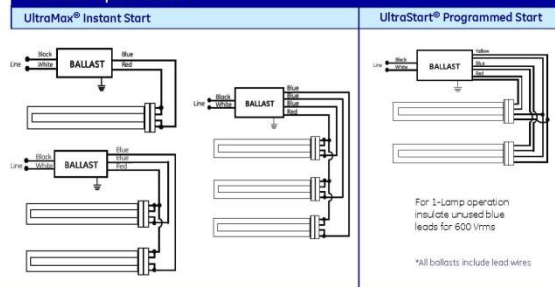

GE Biax Ballasts
Length (L) 9.5"
Mount Length (M) 8.9"
Width (W) 1.7"
Mount Width (X) 1.05"
Height (H) 1.18"

Specifications
• Lamp Frequency > 42kHz
• Lamp CCF > 1.7
• Lamp End of Life Protection Circuit
• Re-Lamp Auto-Reset
• THD < 10%
• Power Factor > 98%
• cUL listed, Outdoor Type 1, HL
• FCC 47CFR Part 18 Non-Consumer





GE Lighting

71428 - GEC213-MVPS-BES

GE CFL Multi-Volt ProLine™ Electronic Program / Rapid Start Ballast

- Multi-Voltage technology means a single ballast handles voltage from 108V to 305V
- Programmed starting for extended lamp life
- End-of-Lamp-Life Protection
- Color Coded Poke-In Connectors simplifies wiring



GENERAL CHARACTERISTICS

Application	2 or 1- CFQ13W/G24q Bottom Exit with Studs 120-277V Proline PS
Category	Compact Fluorescent
Ballast Type	Electronic - Program / Rapid Start
Starting Method	Programmed start
Lamp Wiring	Series
Line Voltage Regulation (+/-)	10 %
Case Temperature	70 °C(158 °F)
Ballast Factor	Normal
Power Factor Correction	Active
Sound Rating	A (20-24 decibels)
Enclosure Type	Metal
Additional Info	Auto-restart/Thermally protected/Universal voltage

PRODUCT INFORMATION

Product Code	71428
Description	GEC213-MVPS-BES
Standard Package	Case
Standard Package GTIN	10043168714287
Standard Package Quantity	10
Sales Unit	Case
No Of Items Per Sales Unit	1
No Of Items Per Standard Package	10
UPC	043168714280

DIMENSIONS

Case dimensions	
Length (L)	5.0 in(127.00 mm)
Width (W)	2.4 in(60.96 mm)
Height (H)	1.0 in(25.40 mm)
Mounting dimensions	
Mount Length (M)	4.6 in(117.60 mm)
Weight	0.57 lb
Exit Type	Poke-in
Remote Mounting Distance	20 ft
Remote Mounting Wire Gauge	18 AWG

ELECTRICAL CHARACTERISTICS

Supply Current Frequency 50 Hz/60 Hz

SAFETY & PERFORMANCE

- CSA
- UL Class P
- UL Listed
- UL Type 1 Outdoor
- UL Type CC
- UL Type HL
- FCC Part 18 Class B at 120 volts

SPECIFICATIONS BY LAMP & WATTAGE

Lamp	# of Lamps	Line Volts	System Watts	Nom. Line Current	System Ballast Factor	Ballast Efficacy Factor	Power Factor% (>=)(<=)	Crest Factor THD% (<=)	Min. Starting Temp (°F/°C)
CFTR18W/4P	1	120	20	0.17 A	1.00	5.00	99	1 1/2	-20.0 / -29
CFTR18W/4P	1	277	20	0.07 A	1.00	5.00	97	1 1/2	-20.0 / -29
CFTR13W/4P	1	120	16	0.16 A	1.00	NaN	96	1 1/2	-20.0 / -29
CFTR13W/4P	1	277	16	0.06 A	1.00	NaN	96	1 1/2	-20.0 / -29
CFTR13W/4P	2	120	29	0.25 A	1.00	3.45	99	1 1/2	-20.0 / -29
CFTR13W/4P	2	277	29	0.11 A	1.00	3.45	99	1 1/2	-20.0 / -29
CFS16W/4P	1	120	17	0.14 A	1.00	5.88	96	1 1/2	-20.0 / -29
CFS16W/4P	1	277	17	0.06 A	1.00	5.88	96	1 1/2	-20.0 / -29
CFS10W/4P	1	120	13	0.11 A	1.05	8.08	96	1 1/2	-20.0 / -29
CFS10W/4P	1	277	13	0.05 A	1.05	8.08	96	1 1/2	-20.0 / -29
CFS10W/4P	2	120	23	0.19 A	0.95	4.13	97	1 1/2	-20.0 / -29
CFS10W/4P	2	277	23	0.09 A	0.95	4.13	97	1 1/2	-20.0 / -29
CFQ18W/4P	1	120	20	0.17 A	1.00	5.00	99	1 1/2	-20.0 / -29
CFQ18W/4P	1	277	20	0.07 A	1.00	5.00	97	1 1/2	-20.0 / -29
CFQ13W/4P	1	120	16	0.16 A	1.00	NaN	96	1 1/2	-20.0 / -29
CFQ13W/4P	1	277	16	0.06 A	1.00	NaN	96	1 1/2	-20.0 / -29
CFQ13W/4P	2	120	29	0.25 A	1.00	3.45	99	1 1/2	-20.0 / -29
CFQ13W/4P	2	277	29	0.11 A	1.00	3.45	99	1 1/2	-20.0 / -29

WARRANTY INFORMATION

For additional information, visit www.gelighting.com

fixture type: N2

UltraStart® Watt-Miser® and High Lumen T5 Systems

T5 Watt-Miser® High Output Lamps

P/C	Description	Watts	Lumens Initial	Lumens Mean	Color Temp	CRI	Rated Life 3hrs/start	Rated Life 12hrs/start	Nominal Length (in.)	Case Qty
71627	F54T5/830W-MECCO	51	5,000	4,600	3000	85	25,000	30,000	45.2	40
71628	F54T5/835W-MECCO	51	5,000	4,600	3500	85	25,000	30,000	45.2	40
71629	F54T5/841W-MECCO	51	5,000	4,600	4100	85	25,000	30,000	45.2	40
71630	F54T5/850W-MECCO	51	4,750	4,410	5000	85	25,000	30,000	45.2	40
71631	F54T5/865W-MECCO	51	4,750	4,370	6500	85	25,000	30,000	45.2	40

T5 Watt-Miser® High Efficiency

P/C	Description	Watts	Lumens Initial	Lumens Mean	Color Temp	CRI	Rated Life 3hrs/start	Rated Life 12hrs/start	Nominal Length (in.)	Case Qty
71632	F14T5/830W-MECCO	13	1,350	1,240	3000	85	25,000	30,000	21.6	40
71633	F14T5/835W-MECCO	13	1,350	1,240	3500	85	25,000	30,000	21.6	40
71634	F14T5/841W-MECCO	13	1,350	1,240	4100	85	25,000	30,000	21.6	40
71635	F14T5/850W-MECCO	13	1,300	1,190	5000	85	25,000	30,000	21.6	40
71636	F14T5/865W-MECCO	13	1,250	1,150	6500	85	25,000	30,000	21.6	40

P/C	Description	Watts	Lumens Initial	Lumens Mean	Color Temp	CRI	Rated Life 3hrs/start	Rated Life 12hrs/start	Nominal Length (in.)	Case Qty
71637	F21T5/830W-MECCO	20	2,100	1,930	3000	85	25,000	30,000	33.4	40
71638	F21T5/835W-MECCO	20	2,100	1,930	3500	85	25,000	30,000	33.4	40
71639	F21T5/841W-MECCO	20	2,100	1,930	4100	85	25,000	30,000	33.4	40
71640	F21T5/850W-MECCO	20	2,000	1,840	5000	85	25,000	30,000	33.4	40
71641	F21T5/865W-MECCO	20	1,950	1,790	6500	85	25,000	30,000	33.4	40

P/C	Description	Watts	Lumens Initial	Lumens Mean	Color Temp	CRI	Rated Life 3hrs/start	Rated Life 12hrs/start	Nominal Length (in.)	Case Qty
71642	F28T5/830W-MECCO	26	2,900	2,660	3000	85	25,000	30,000	45.2	40
71643	F28T5/835W-MECCO	26	2,900	2,660	3500	85	25,000	30,000	45.2	40
71644	F28T5/841W-MECCO	26	2,900	2,660	4100	85	25,000	30,000	45.2	40
71645	F28T5/850W-MECCO	26	2,750	2,530	5000	85	25,000	30,000	45.2	40
71646	F28T5/865W-MECCO	26	2,700	2,480	6500	85	25,000	30,000	45.2	40

P/C	Description	Watts	Lumens Initial	Lumens Mean	Color Temp	CRI	Rated Life 3hrs/start	Rated Life 12hrs/start	Nominal Length (in.)	Case Qty
71647	F35T5/830W-MECCO	33	3,650	3,350	3000	85	25,000	30,000	57.1	40
71648	F35T5/835W-MECCO	33	3,650	3,350	3500	85	25,000	30,000	57.1	40
71649	F35T5/841W-MECCO	33	3,650	3,350	4100	85	25,000	30,000	57.1	40
71650	F35T5/850W-MECCO	33	3,500	3,220	5000	85	25,000	30,000	57.1	40
71651	F35T5/865W-MECCO	33	3,400	3,120	6500	85	25,000	30,000	57.1	40

T5 High Lumen

P/C	Description	Watts	Lumens Initial	Lumens Mean	Color Temp	CRI	Rated Life 3hrs/start	Rated Life 12hrs/start	Nominal Length (in.)	Case Qty
71652	F28W/T5/830W-LECCO	26	3,050	2,810	3000	85	20,000	24,000	45.2	40
71653	F28W/T5/835W-LECCO	26	3,050	2,810	3500	85	20,000	24,000	45.2	40
71654	F28W/T5/841W-LECCO	26	3,050	2,810	4100	85	20,000	24,000	45.2	40
71655	F28W/T5/850W-LECCO	26	2,900	2,670	5000	85	20,000	24,000	45.2	40
71656	F28W/T5/865W-LECCO	26	2,850	2,620	6500	85	20,000	24,000	45.2	40

GE UltraStart® Ballast

P/C	Description	# Lamps	Lamp Type	Voltage	Type	Output	Additional Information
99649	GE4540-MPS90-E	4-1	F54T5HO	120 to 277	UltraStart	PRS	High Temp E Can
99650	GE4540-MPS90-E-A2	4-1	F54T5HO	120 to 277	UltraStart	PRS	High Temp E Can Pallet Pack
99651	GE228-MPS40-A	2 or 1	F54T5HO	120 to 277	UltraStart	PRS	High Temp F Can
99652	GE228-MPS40-F-A2	2 or 1	F54T5HO	120 to 277	UltraStart	PRS	High Temp F Can Pallet Pack
99653	GE228-MPS40-A	2 or 1	F14-F35HE	120 to 277	UltraStart	PRS	High Light 1.15 BF A Can
99654	GE228-MPS40-A-T42	2 or 1	F14-F35HE	120 to 277	UltraStart	PRS	High Light 1.15 BF A Can Pallet
99655	GE228-MPS4-A	2 or 1	F14-F35HE	120 to 277	UltraStart	PRS	Normal Light 95 BF A Can
99656	GE228-MPS4-A-T42	2 or 1	F14-F35HE	120 to 277	UltraStart	PRS	Normal Light 95 BF A Can Pallet

For additional product and application information, please consult GE's Website: www.ge-lighting.com

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, express or implied, that such performance will be obtained under end-use conditions.

71094 1/2006 Printed in USA

GE Consumer & Industrial Lighting



UltraStart® Watt-Miser® T5 Systems



High-Bay Solutions

Incredible Energy Savings

The GE UltraStart® Watt-Miser® T5 system offers the industry's **lowest** overall system wattage for high-bay applications - 216 watts vs. 234 watts. This equates to over **\$54.00** in energy savings per fixture. See below.

Huge Maintenance Savings

GE incorporates parallel lamp operation with the UltraStart® Watt-Miser® T5 System. When one lamp fails, the others remain lit. Studies show parallel operation reduces spot re-lamping by up to 50% and can extend group re-lamping by 15%.

"Ultra-Fast" Starting Time

Faster than typical programmed start systems, the GE UltraStart® Watt-Miser® T5 system is virtually "instant on" (7 seconds start time). You'll experience no delays associated with the use of occupancy sensors and/or lighting controls.



UltraStart® T5 54W Multi-Volt Ballast

- Parallel operation
- Adapts automatically to any voltage from 120-277
- Anti-striction control
- Bi-Level switching
- Environmentally conscious - RoHS compliant
- Arc-guard protection UL type CC rating
- Fast starting time: 700ms
- 90C Temperature rating
- 5 year/55C ambient, making more Hi Bay applications possible



Save up to \$54.00 per fixture in energy savings with High Output Watt-Miser Lamps & UltraStart Ballast

High Output Watt-Miser® Lamps

- Save \$36.00 energy per 4-lamp fixture vs. standard F54T5 lamp
- 51W T5 High output lamp
- 5,000 Initial lumens (same as current 54W lamp)
- 98 Initial lumens/watt
- Ideal for spot and group relamping
- Environmentally conscious TCLP-compliant

Don't Leave Money On The Table By Not Choosing GE T5 Systems!

Standard 4 lamp 54W T5	Watt-Miser® lamp	UltraStart® Watt-Miser®
Initial Lumens = 20,000 Watts = 234W LPW = 85	Initial Lumens = 20,000 Watts = 222W LPW = 90 Lamp to Lamp Savings = \$36/fixture	Initial Lumens = 20,000 Watts = 216W LPW = 93 Lamp and Ballast Savings = \$54/fixture

Assumptions: 8.5 ball, 30,000 hours @ 12 hours start, Savings per 4 lamp 54W T5 fixture

Commercial Troffer Solutions

UltraStart® T5 14-35W Multi-Volt Ballast

- Parallel operation
- Adapts automatically to any voltage from 120-277
- One ballast handles a variety of lamp sizes 14W to 35W
- Anti-striction control
- Bi-Level switching
- Environmentally conscious - RoHS compliant
- Arc-guard protection UL type CC rating
- Fast starting time: 700ms
- 90C Temperature rating 5 year/55C ambient, making more Hi Bay applications possible



High Efficiency Watt-Miser® Lamps

Save 5% energy per lamp vs. standard High Efficiency lamps!

- Save 5% on wattage by lamp type
- Same Light Output
- 25,000 hour rated life
- Environmentally conscious: TCLP compliant
- Compatible with existing T5 ballasts; maximum savings using GE UltraStart T5 ballasts
- All lamps offered in: 3000K/3500K/4100K/5000K/6500K



F28W/T5 High Lumen

5% higher lumen output vs. standard F28W/T5 lamps

- Reduce maintenance costs: High lumen lamps
- 20,000 hour rated life
- Ideal solution for indirect lighting applications
- 3050 initial lumens vs. 2900 lumens for standard T5
- Environmentally conscious: TCLP compliant

Lamp Type	F34T12	F32TB	F28T5HL	F28T5SHL	F28T5WH	F28T5WH
Ballast Type	2 EM	Std IS	HE PS	HE PS	HE PS	HE PS
Lamp Life*	20000	24000	24000	24000	30000	30000
Number of Lamps	3	3	2	2	2	2
Initial Lumens	2750	2800	3050	3050	2900	2900
Ballast Factor	0.90	0.88	1.15	0.95	1.15	0.95
Light Source Lumen (Mean)	6,683	7,022	6,664	5,505	6,337	5,235
Optical Efficiency (Parabolic)	73.0%	73.0%	86.0%	86.0%	86.0%	86.0%
Fixture Lumen Output (Mean)	4,878	5,126	5,731	4,735	5,449	4,502
Light Loss/Gain		5%	17%	-8%	6%	-12%
System Wattage	114	84	70	57	67	55
Light Source LPW (Mean)	59	84	95	97	95	95
Fixture LPW (Mean)	43	61	82	83	81	82
% Energy Savings		26%	39%	50%	41%	52%

* @ 12 hours per start

fixture type: N3



Electrical Specifications

LED-INTA-0024V-28-F-O	
Brand Name	XITANIUM
Driver Type	Electronic
Input Voltage	120~277
Input Frequency	50/60Hz
RoHS	Yes
Status	Active

Output Power (W)	Output Voltage (V)	Output Current (A)	Operating Temp. Range (°F/°C)	Input Current at 120V (A)	Max. Input Power (W)	Inrush Current (A _{in} /μs)	Max. THD (%)	Min. Power Factor	Surge Protection (KV)	Weight (Lbs)	IP Rating
67	24	0.10~2.8	-40°~140°F (-40~60°C)	0.65	78	100/200	20	0.99	2.5	1.4/635	IP66

Wiring Diagram

Input and output use lead-wires.
Lead-wires are 18AWG 105C/600V solid copper

Standard Lead Length

	in.	cm.
Black	9	22
White	9	22
Blue	26	66
Red	26	66
Gray		
Violet		

Maximum Wiring Distance (at full load)

Wire Size (AWG)	Distance (feet)
26	2
24	3
22	5
20	9
18	14
16	21
14	34
12	53
10	89

Enclosure

	in. (mm)
Case Length	8.34 (211.8)
Case Width	1.76 (42.5)
Case Height	1.1 (27.9)
Mounting Length	8.99 (228.4)
Mounting Width	1.22 (30.9)
Overall Length	9.45 (240)



**UL Class 2
E220165**



**7310_S-000
3426-32**

Revised 09/15/2009

PHILIPS LIGHTING ELECTRONICS N.A.
10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886



GE Lighting

DATA SHEET

CMH Electronic Ballasts

Product Information for Original Equipment Manufacturers

A range of GE electronic ballasts have been introduced to complement the 20, 35, 70 and 150W Constant Color™ Ceramic Metal Halide lamps

Features

- Integral version with open terminals for embodiment into luminaires
- Remote version with terminal cover and cable strain relief for location outside the luminaire
- 50,000 hours service life under the specified conditions
- Reduced power consumption compared to electromagnetic circuits
- Reduced component count and simplified wiring compared to electromagnetic circuits
- Rapid and controlled power run-up
- Lamp life maximised by square-wave current and constant lamp power
- Excellent lamp colour stability throughout life
- Automatic lamp failure shut-down
- Timed restart after mains voltage interruption
- Immune to mains voltage variations



Watts	Volts	Description	Mounting	Weight	Pack Qty	Product Code W
20	220-240	BLS/E/20W/CMH	Integral	190 g	12	13032
20	220-240	BLS/E/20W/CMH-R	Remote	230 g	12	13034
35	220-240	BLS/E/35W/CMH	Integral	215 g	12	13035
35	220-240	BLS/E/35W/CMH-R	Remote	230 g	12	13036
70	220-240	BLS/E/70W/CMH	Integral	300 g	12	13040
70	220-240	BLS/E/70W/CMH-R	Remote	310 g	12	13047
150	220-240	BLS/E/150W/CMH	Integral	430 g	12	13050
150	220-240	BLS/E/150W/CMH-R	Remote	445 g	12	13053

	20W	35W	70W	150W	
System Power	235	43	78	159	W
System Efficacy	72	79	79	88	lm/W
Lumens*	1700	3400	6200	14000	lm
Lamp Power	20	39	72	146	W
Lamp Efficacy	85	87	86	96	lm/W
Lamp Voltage Range	70...125	70...125	70...125	70...125	V

*Typical value for Single Ended Mini 20W/35W/70W CMH and Single Ended 150W/300K CMH

	20W	35W	70W	150W
Single Ended Mini	*	*	*	
Single Ended		*	*	*
Double Ended			*	*
PAR 20		*		
PAR 30		*	*	
Elliptical Clear		*		
Elliptical Diffuse		*		
Tubular Clear		*	*	

Application Areas

- Retail
- Display Cabinet
- Commercial Interiors
- Offices
- Lobbies
- Public Buildings




CMH Electronic Ballasts


Operating Characteristics	20W	35W	70W	150W	
Mains Voltage	220...240	220...240	220...240	220...240	V
Mains Current	0.10	0.18	0.33	0.69	A
Mains Frequency	50...60	50...60	50...60	50...60	Hz
Power Factor	> 0.95	> 0.95	> 0.95	> 0.95	
Allowed Mains Voltage Range	198...264	198...264	198...264	198...264	V
Ignition Voltage*	< 2.5	< 2.5	< 2.5	< 2.5	kV
Lamp Operating Frequency	150	150	150	150	Hz
Max Cable Capacitance	1000	3000	3000	3000	pF
Max Lamp Distance**	10	25	25	25	m
Ambient Temperature Range	-20...+50	-20...+50	-20...+50	-20...+50	°C
Maximum Case Temperature	75	75	75	80	°C
Thermal Cut-off on PCB	110	110	110	110	°C

* If a hot lamp or no lamp is detected the ballast will attempt to start the lamp after one minute, if not successful further attempts are made up to a maximum of 4 times in 5 minute cycles, then if not successful the ballast will shut-down. The ballast is reset automatically by a supply interruption.
 ** Typical value if cable capacitance is below the specified limit

Dimensions

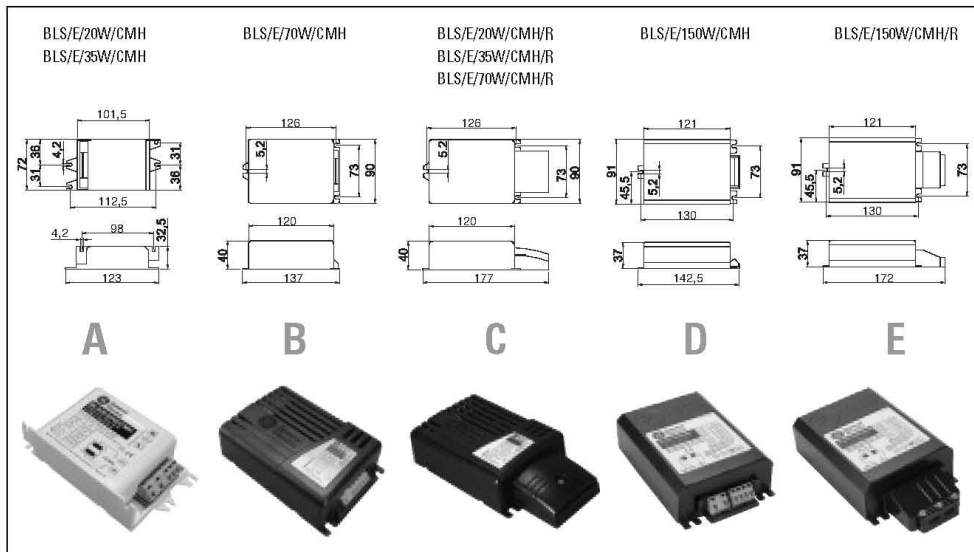

Circuitry

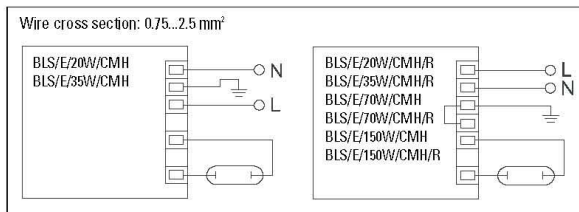

The ballasts comply with the relevant parts of the following standards:

- RFI suppression EN 55015
- Harmonics EN 61000-3-2
- Immunity EN 61547
- Safety EN 60926/EN 60928/EN 61347
- Performance EN 60927/EN 60929



Please visit us on the web at www.GELighting.com

GE Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.
 CMH Electronic Ballasts – Product Information for OEMs – October 2003.

and General Electric are both registered trademarks of the General Electric Company. © General Electric Company 2003

fixture type: P4-16



IDA-2S28-D@277V	
Brand Name	ROVR
Ballast Type	Electronic Dimming
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	120-277
Input Frequency	50/60 HZ
Status	Active

Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (*F/C)	Input Current (Amps)	Input Power (Watts) (min/max)	Ballast Factor (min/max)	MAX THD %	Power Factor	Lamp Current Crest Factor	B.E.F.
F14T5	2	14	50/10	0.12	09/34	0.03/1.00	10	0.98	1.7	2.94
F21T5	2	21	50/10	0.18	10/49	0.03/1.00	10	0.98	1.7	2.04
* F28T5	2	28	50/10	0.22	12/63	0.03/1.00	10	0.98	1.7	1.59
F28T5/ES (25W)	2	25	50/10	0.21	12/59	0.03/1.00	10	0.98	1.7	1.69

Wiring Diagram

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.
Black	0	0
White	0	0
Blue	0	0
Red	0	0
Yellow	0	0
Gray	0	0
Violet	0	0

	in.	cm.
Yellow/Blue	0	0
Blue/White	0	0
Brown	0	0
Orange	0	0
Orange/Black	0	0
Black/White	0	0
Red/White	0	0

Enclosure

Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
16.70 "	1.18 "	1.00 "	16.34 "
16 7/10	1 9/50	1	16 17/50
42.4 cm	3 cm	2.5 cm	41.5 cm

Revised 01/18/2011



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PHILIPS LIGHTING ELECTRONICS N.A.
 10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
 Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
 Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886




VEZ-154	
Brand Name	MARK 10 POWERLINE
Ballast Type	Electronic Dimming
Starting Method	Programmed Start
Lamp Connection	Series
Input Voltage	277
Input Frequency	50/60 HZ
Status	Active

Electrical Specifications

Lamp Type	Num. of Lamps	Rated Lamp Watts	Min. Start Temp (*F/C)	Input Current (Amps)	Input Power (Watts) (min/max)	Ballast Factor (min/max)	MAX THD %	Power Factor	Lamp Current Crest Factor	B.E.F.
F54T5/HO	1	54	50/10	0.23	13/63	0.03/1.00	10	0.98	1.7	1.59
F54T5/HO/ES (49W)	1	49	50/10	0.21	13/59	0.03/1.00	10	0.98	1.7	1.69
* FC12T5/HO	1	55	50/10	0.22	13/59	0.03/0.90	10	0.98	1.7	1.53
FT55W/2G11	1	55	50/10	0.22	13/59	0.05/0.90	10	0.98	1.7	1.53

Wiring Diagram

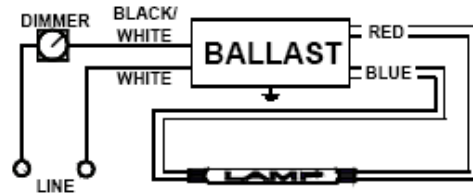

The wiring diagram that appears above is for the lamp type denoted by the asterisk (*)

Standard Lead Length (inches)

	in.	cm.		in.	cm.
Black	0	0	Yellow/Blue	0	0
White	0	0	Blue/White	0	0
Blue	0	0	Brown	0	0
Red	0	0	Orange	0	0
Yellow	0	0	Orange/Black	0	0
Gray	0	0	Black/White	0	0
Violet	0	0	Red/White	0	0

Enclosure



Enclosure Dimensions

OverAll (L)	Width (W)	Height (H)	Mounting (M)
16.70 "	1.18 "	1.00 "	16.34 "
16.7/10	1.2/50	1	16.17/50
42.4 cm	3 cm	2.5 cm	41.5 cm

Revised 01/07/2011



Data is based upon tests performed by Philips Lighting Electronics N.A. in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.

PHILIPS LIGHTING ELECTRONICS N.A.

10275 WEST HIGGINS ROAD · ROSEMONT, IL 60018
 Tel: 800-322-2086 · Fax: 888-423-1882 · www.philips.com/advance
 Customer Support/Technical Service: 800-372-3331 · OEM Support: 866-915-5886

fixture type: Z1

Revised: 3/5/2009

PHILIPS ADVANCE		e-Vision® Electronic Ballast for Metal Halide Lamps			Catalog Number: IMH-39-G For 39W Metal Halide Lamps ANSI M130 120-277 50/60Hz Electronic Status: RELEASED											
DIMENSIONS AND DATA																
Lamp		Input Volts	Catalog Number*	Line Current (Amps)	Input Power (Watts)	Min Power Factor	Wiring Diag	Fig.	Weight (lb)	Max. Distance to Lamp (ft)						
Number	Watts															
39W Watt Lamp, ANSI Code M130 Minimum Starting Temp -30°C/-20°F																
1	39	120 277	IMH-39-G-XXX	0.39 0.18	46 45	0.9	3	G	0.9	5						
Case Figure	Overall Length	Case Length	Case Width	Height	Mountin Length	Mounting Width										
G	97mm [3.8"]	90mm [3.5"]	77mm [3.0"]	30mm [1.2"]	87mm [3.4"]	67mm [2.6"]										
INSTALLATION & APPLICATION NOTES: 1. Maximum allowable case temperature is 90°C. See figure above for measurement location 2. Ignition pulse is 4 kV max 3. All leads are 9 inches long 4. Ballast output will shutdown after 20 minutes if lamp fails to ignite 5. Power must be cycled off – then on, after replacing lamp 6. Connect the red lead to the center terminals of the lamp when using screw base lamps							*Ordering Information <table border="1"> <tr> <th>Order Suffix</th> <th>Description</th> </tr> <tr> <td>-LF</td> <td>Ballast with side exit leads and mounting feet</td> </tr> <tr> <td>-BLS</td> <td>Ballast with bottom exit leads and mounting studs</td> </tr> </table>				Order Suffix	Description	-LF	Ballast with side exit leads and mounting feet	-BLS	Ballast with bottom exit leads and mounting studs
Order Suffix	Description															
-LF	Ballast with side exit leads and mounting feet															
-BLS	Ballast with bottom exit leads and mounting studs															
Data is based on tests performed by Philips Advance in a controlled environment and is representative of relative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.																

Philips Lighting Electronics N.A.

10275 West Higgins Road • Rosemont, IL 60018 • www.philips.com/advance
 Tel: 800-322-2086 • Fax: 800-423-1882 • Customer Support: 800-372-3331 • OEM Support: 866-915-5886

appendix c - full control schedule and cut sheets

Controls Schedule			
Type	Manufacturer	Product	Description
LC-100	Wattstopper	Intelligent Power Pack	Power pack delivers 0-10V dimming control to lighting loads.
LMLS-305	Wattstopper	LightSaver Photocell	Closed loop photosensor provides the daylight data necessary for operation.
LMRC-211	Wattstopper	LightSaver Room Dimming Controller	Provides automatic dimming control for fluorescent fixtures. Closed loop control utilizes a photocell for single-zone dimming.
LMRC-212	Wattstopper	LightSaver Room Dimming Controller	Provides automatic dimming control for fluorescent fixtures. Closed loop control utilizes a single photocell for multi-zone dimming.
LMRC-213	Wattstopper	LightSaver Room Digital Controller	Provides up to 16 scene settings for maximum control of restaurant lighting settings.
LMSW-100	Wattstopper	LightSaver Wall Switches	Allows occupants to temporarily override the daylighting control systems.
LMSW-105	Wattstopper	LightSaver Scene Switch	Allows occupant control of dimming scenes.

control type: LC-100

LC-100 Intelligent Power Pack



PROJECT
LOCATION/TYPE

Product Overview

Description

The LC-100 is a power pack with two relay outputs and two dimming channels delivering both switching and 0-10V dimming control to lighting loads. Signal inputs offer integrated operation with a range of control devices.

Operation

A dual voltage device capable of operating at either 120 or 277V, the LC-100 installs as a standard power pack, connecting to junction boxes in a ceiling or a location close to controlled loads. With 24VDC at 150mA available, it provides power to occupancy sensors, photocells, and other devices. Low voltage switch inputs give occupants ON/OFF switching and up/down dimming control of two independent lighting loads. Separate signaling inputs for occupancy sensors, time clocks and photocells allow shutoff and daylighting control while providing convenient scenarios (i.e., blink warning, manual on or auto on, hold on, on only) to meet control needs.

Dimming Control

When used with 0-10V controllable ballasts, the LC-100 provides dimming and ON/OFF control of up to 100 ballasts per dimming channel. Occupants can conveniently dim up/down and turn lighting ON/OFF using momentary low voltage switches. The load shed feature dims lighting to preset levels during peak demand periods to reduce energy consumption. Lighting maximum levels can also be set for greater energy savings.

Applications

The LC-100 integrates control of other devices to meet room-specific lighting control needs. It is ideal for compliance with bi-level switching, daylighting and lighting shutoff energy code provisions. Where load shedding is needed, the LC-100 can switch off non-critical lighting while leaving other lighting on. Or with controllable ballasts, it can dim lighting down to preset load "shed" levels.

Features

- Single package with relay outputs, dimming channels, power supply, and device inputs for simpler installation
- Two switch inputs accept three-wire momentary, two-wire momentary pushbutton, or maintained low voltage switches
- Hold-ON feature keeps lighting on during scheduled time, reverts to occupancy sensor control after hours
- Burn in timer prevents lamps from dimming for initial 100 hours for extended lamp life
- Pilot light output for status annunciation at switches
- Blink warning five minutes prior to shutoff
- Isolated relay contact for each relay output provides status
- Manual ON/Auto ON settings for convenience and energy savings
- After hour override adjustable to 30 minutes, 1 hour, 2 hours or 4 hours
- Works with the LS-301 dimming photosensor to provide closed loop dimming control
- Qualifies for ARRA-funded public works projects

WattStopper
www.wattstopper.com
800.879.8585




Specifications


- 120/277 VAC voltage input, 50/60 Hz
- Two relay outputs rated 20 Amp 120V tungsten and ballast, 20 Amp 277V ballast
- Two isolated NO/NC relays rated 1 Amp @ 24VDC
- NEMA 1 enclosure; acceptable for use in plenum spaces
- Output power 150mA @ 24VDC with automatic overload protection
- Dual voltage input 120 or 277VAC @ 14 Watts maximum
- Switch wiring distances up to 1000 feet with 18 gauge wire
- Dimensions: 6.63" x 6.13" x 2.13" [168.4mm x 155.7mm x 54.1mm] with a 1/2 inch snap-in nipple
- UL and cUL listed
- Five year warranty

Wiring & Installation

LC-100 Wiring Connections, Inputs, and to Dimming Ballasts

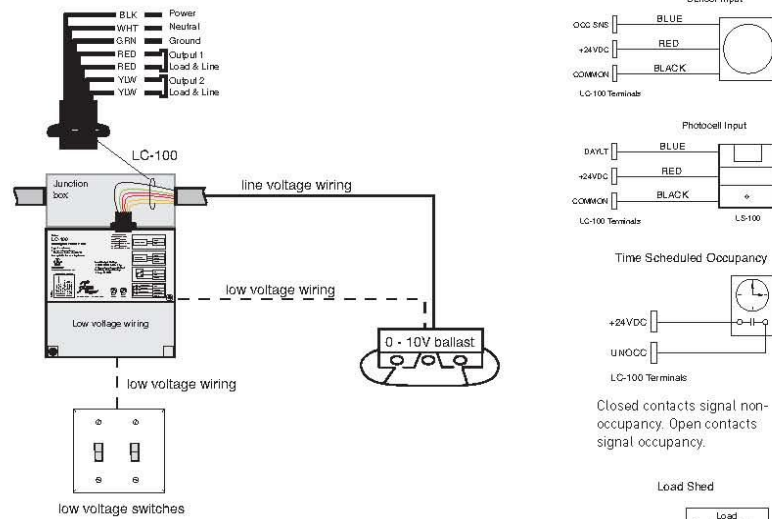

LC-100 Wiring Connections

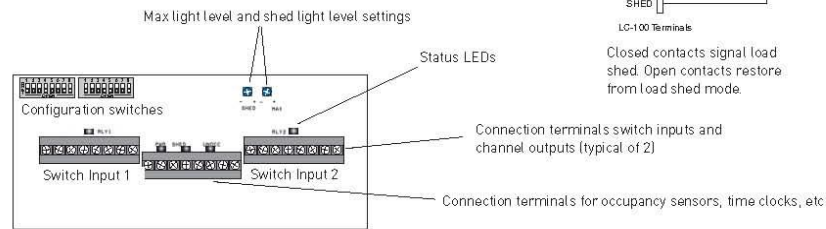

Ordering Information

Catalog No.	Input Voltage	Load Ratings			Output
		Ballast (A)	Incan (A)	Motor (HP)	
LC-100	120/277 VAC; 50/60 Hz	20	20	1*	24 VDC; 150 mA**

* 1 Hp rated at 120/250 VAC. ** Output is 150 mA with relays connected.

Installation Notes

1. All WattStopper power packs should be installed in accordance with state, local, and national electrical codes and requirements.
2. Power packs are designed to attach to existing or new electrical enclosures with 1/2 inch knockouts. (Check electrical codes in your area.)
3. Low-voltage wiring should use stranded, 18-22 AWG, properly rated cable. Do not run low voltage Class 2 wiring with high voltage wiring. For plenum return ceilings use UL listed plenum-approved cables.

Pub. No. 14703 rev.10/2009

A Group brand www.wattstopper.com | 8 0 0 . 8 7 9 . 8 5 8 5

control type: LMLS-305



LMLS-305 0-10 Volt Dimming Photosensor

Single zone, closed loop
automatic dimming
daylighting sensor

Component of Digital Lighting
Management integrated control
systems

Controls standard 0-10 VDC
electronic dimming ballasts



All setup performed remotely
with LightSaver handheld or
DLM wireless configuration tool

Optional occupant adjustment via
handheld remote

Product Overview

Description

The LMLS-305 0-10 Volt Dimming Photosensor is a single zone ceiling-mounted device that works with standard 0-10 VDC electronic dimming ballasts to dim lighting as the ambient light level increases. It is an optional part of a WattStopper Digital Lighting Management (DLM) system and is designed for closed loop daylighting applications.

Operation

The LMLS-305 operates on Class 2 power supplied to a DLM local network by one or more DLM room controllers. It is a closed loop photosensor that measures the total light level from daylight and electric light in the controlled area in order to adjust electric lighting levels. As the daylight contribution increases, the controlled lights dim down. The LMLS-305 features a sliding setpoint control algorithm to compensate for the different spatial distribution ratios of electric light and daylight. It calculates the required light level based on two setpoints. The night setpoint is the target level when no daylight is present. The day setpoint is the target level when significant daylight is present. In Plug n' Go mode, the LMLS-305 defaults to controlling the first load in the DLM system.

Features

- Provides precise control of lighting to maintain desired light level
- Extremely linear photocell response with greater than 1% accuracy
- Designed to measure light as the human eye perceives it and eliminate overreporting of illumination levels provided by daylight

WattStopper
www.wattstopper.com
800.879.8585

LOCATION/TYPE

Adjustment via Handheld Remote Control

All LMLS-305 adjustments can be made either with the LightSaver LSR-301-S or the DLM LMCT-100 handheld remotes. The LSR-301-S provides five buttons for initial setup, which is easily completed by first raising or lowering electric lighting to desired levels, then programming this target level into the photosensor. The LMCT-100 uses simple, menu-driven screens for users to adjust daylighting parameters. In addition, an occupant remote control (LSR-301-P) provides an easy tool for use by occupants in adjusting light levels. With this optional tool, users can increase target light levels by up to 25% or reduce them to the lamp/ballast minimum level. Pressing the "Auto" button returns the control to programmed levels.

Applications

The LMLS-305 is designed to blend into its surroundings when installed in any environment. It provides one zone of daylighting control for applications such as private offices or classrooms. The LMLS-305 can be combined with a DLM occupancy sensor and a DLM wall switch.

- Separate handheld remote controls for setup and occupant adjustment to prevent tampering
- Boosts energy savings by reducing maximum lamp output, often resulting in savings of 20%, or more, compared with lights at full output
- Achieves lumen maintenance by holding target light level as lamp output decreases over time
- Qualifies for ARRA-funded public projects




Specifications

- Input voltage: 24VDC from DLM network
- Current consumption: 30 mA
- DLM local network connection: 1 RJ45 port via RJ45 plug and coupler (included)
- Full range dimming: .2 VDC (minimum) to 10 VDC (100% lighting) output voltage
- 0-10VDC signal: grey and violet to ballast
- Controls up to 50 standard dimming ballasts
- Setpoints are adjustable from 20-60 footcandles (210-640 lux)
- Operating conditions: for indoor use only; 32-120°F (0-49°C); less than 90% RH
- UL and cUL listed
- FCC part 15 compliant
- Five year warranty


Controls & Response

Remote Controls

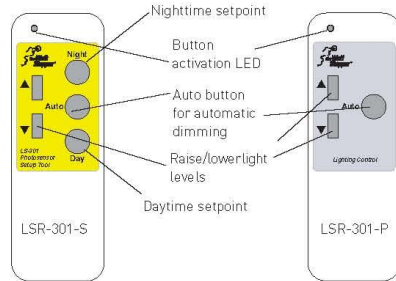

Remote handheld (above left) enables easy setup while optional occupant remote (above right) provides adjustability for individual lighting preferences.


Spectral Response Curve



The spectral response of the LMLS-305 photocell closely matches the sensitivity of the human eye.


Installation & Placement

Mounting and Installation

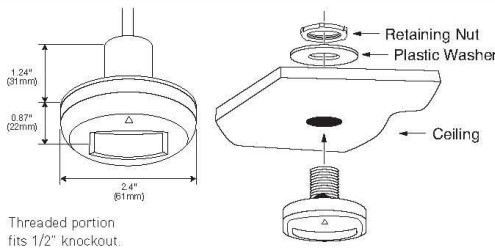

Threaded portion fits 1/2" knockout.

Placement




Placement Guidelines

- Mount photocell between 6 and 12 feet (1.8m - 3.7m) from window.
- Do not mount directly above direct/indirect pendant fixtures. Mount at least 4 feet (1.2m) from pendant fixtures.

Connecting

Sample Connection Diagram

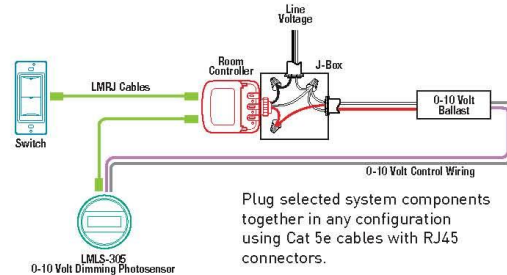

Plug selected system components together in any configuration using Cat 5e cables with RJ45 connectors.

Ordering Information

Catalog No.	Description
<input type="checkbox"/> LMLS-305	0-10 Volt Dimming Photosensor
<input type="checkbox"/> LMLS-305-U	0-10 Volt Dimming Photosensor, ARRA-compliant
<input type="checkbox"/> LSR-301-S	Setup Remote Control (2 AAA batteries included)
<input type="checkbox"/> LSR-301-S-U	Setup Remote Control, ARRA-compliant (2 AAA batteries included)
<input type="checkbox"/> LSR-301-P	Occupant Remote Control (2 AAA batteries included)
<input type="checkbox"/> LSR-301-P-U	Occupant Remote Control, ARRA-compliant (2 AAA batteries included)
<input type="checkbox"/> LMCT-100	Wireless Remote Configuration Tool
<input type="checkbox"/> LMCT-100-U	Wireless Remote Configuration Tool, ARRA-compliant



LMRC-210 Series Digital On/Off/0-10 Volt Dimming Room Controllers

Plenum-rated controllers with line voltage relay(s) and 0-10 volt dimming output(s)

Components of Digital Lighting Management integrated control systems

Plug to other components using Cat 5e cables with RJ45 connectors eliminating wiring errors



Plug n' Go automatic configuration for maximum energy efficiency

Store 16 preset lighting levels for each load

Support energy saving manual-on, bi-level, tri-level and dimming control strategies

PROJECT
LOCATION/TYPE

Product Overview

Description

LMRC-210 Series Digital Room Controllers include one, two or three relay(s) to switch a total of 20 amps, a high-efficiency switching power supply and one 0-10 volt output per relay for control of dimmable loads including electronic ballasts (Advance Mark 7, or equivalent). They are the foundation of a WattStopper Digital Lighting Management (DLM) system, and allow integration of occupancy sensors, daylighting controls and switches for energy-efficient lighting control.

Operation

LMRC-210 Series Room Controllers operate on one 120 or 277 volt, 20 amp, feed and provide Class 2 power to sensors and switches via the DLM local network. Once powered up, Plug n' Go automatically configures system components for the most energy-efficient operation. The room controllers then dim or switch lighting or motor loads in response to input from the communicating devices. When a dimming input is received, the relay switches on when the dimmed level rises above zero, and off when it reaches zero, to coordinate control of power and the 0-10 volt signal to the load. They also monitor the current draw of the total connected load. Each room controller stores up to 16 preset levels for each dimmed output.

Features

- Plug n' Go™ automatic configuration for quick installation and maximum energy savings
- Push n' Learn™ functionality for personalization without the need for tools or a PC
- Digital Lighting Management components plug together on a free-topology Cat 5e DLM local network
- On/Off/Dim button for each load
- LED indicates status of each connected load

Plug n' Go Automatic Configuration

DLM room controllers manage Plug n' Go automatic system configuration, which establishes functionality based on the installed components. When room controllers are connected only to occupancy sensors, the system defaults to automatic on/off operation. If a wall switch is added to a system with one load, the load defaults to manual-on/automatic-off operation. If there is a wall switch and multiple loads, load one turns on automatically, while additional loads default to manual-on control; all loads turn off automatically. At system startup, default dimming parameters are established including: levels for presets 1-4; fade times; and fade and ramp rates. Dimming and system parameters may be customized using Push n' Learn.

Applications

LMRC-210 Series Room Controllers are ideal for single or multiple zone on/off or dimming lighting control applications. They are appropriate for applications in private offices, open offices, conference rooms and classrooms in any commercial building. LMRC-210 Series Room Controllers also help facility managers who want to track building power usage by monitoring current for lighting or other loads. A network bridge (LMBC-300 or LMRC-3xx) is required to expose DLM local network power data readings to a Segment Manager or BAS.

- Integral current monitoring of total connected load
- Optional lamp burn in, from 1-100 hours
- 4 RJ45 ports with integral strain relief
- Zero-crossing circuitry for each relay for reliability and increased product life
- UL 2043 plenum rated
- RoHS compliant
- Qualifies for ARRA-funded public works projects

WattStopper
www.wattstopper.com
800.879.8585




Specifications

- Input/output voltage: 120/277VAC, 50/60Hz
- Maximum 20A combined load per Room Controller; each relay rated for:
 - Ballast or incandescent: 20A
 - Motor load: 1Hp
- Class 2 dimming control signal: 0-10VDC, sinks up to 100mA per channel for control of compatible ballasts (50 if each sources 2mA)
- Class 2 output to DLM local network: 24VDC, up to 250mA across 4 RJ45 ports
- DLM local network parameters:
 - Maximum current: 800mA
 - Category 5e cable, up to 1,000'
 - Up to 64 loads
 - Up to 48 communicating devices
 - Maximum 4 LMRC-100 Series Room Controllers
- Operating conditions: for indoor use only; 32-158°F (0-70°C); 5-95% RH, non-condensing
- UL and cUL listed
- FCC part 15 compliant
- Five year warranty


Controls & Mounting

Controls and Dimensions

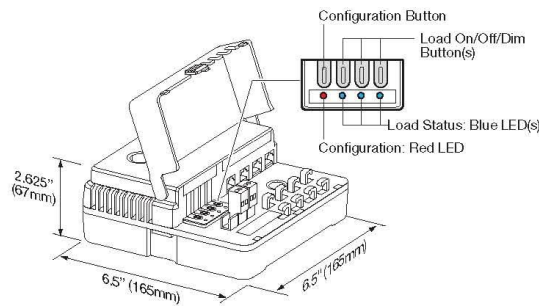

Load Parameter <small>(for each dimmed output)</small>	Default Setting	Available Options
High trim	100%	1-100%
Low trim	0%	0-100%
Preset level: Scenes 1-16	1: 100%, 2: 75%, 3: 50%, 4: 25%, 5-16: 100%	all: 0-100%
Preset fade time	2 seconds	0 seconds - 18 hours
Lamp burn in time	0	0-100 hours


Mounting and Wiring

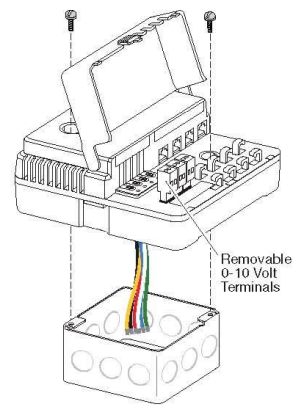

Mount to 4" x 4" x 2 1/8" deep electrical box. Depending on outputs used, a 4-square extension box may be needed. Connect to single 20A circuit.

Connecting

Sample Connection Diagram with Dimming Switches and Scene Control

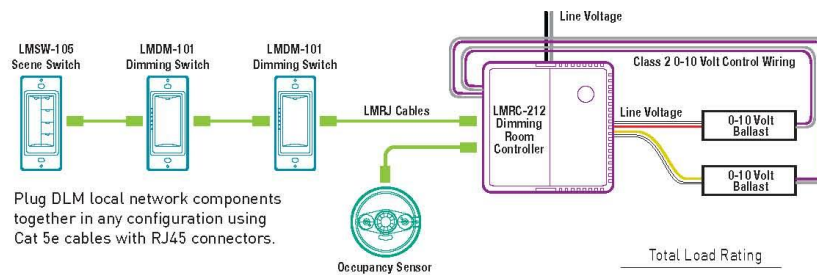

Plug DLM local network components together in any configuration using Cat 5e cables with RJ45 connectors.

Ordering Information

Catalog No.	Description	Voltage	Total Load Rating			
			Ballast (A)	Incan (A)	Motor	Class 2 Outputs
<input type="checkbox"/> LMRC-211	1 Relay Room Controller, 0-10V dimming	120/277VAC, 50/60Hz	20	20	1 Hp	24VDC, 250mA and 0-10VDC
<input type="checkbox"/> LMRC-211-U	1 Relay Room Controller, 0-10V dimming, ARRA compliant					
<input type="checkbox"/> LMRC-212	2 Relay Room Controller, 0-10V dimming					
<input type="checkbox"/> LMRC-212-U	2 Relay Room Controller, 0-10V dimming, ARRA compliant					
<input type="checkbox"/> LMRC-213	3 Relay Room Controller, 0-10V dimming					
<input type="checkbox"/> LMRC-213-U	3 Relay Room Controller, 0-10V dimming, ARRA compliant					
<input type="checkbox"/> LMRC-CA	Conduit Adapter for Low Voltage Connections					

Pub. No. 30104 rev. 11/2010



LMSW-100 Series Digital Wall Switches

Low voltage pushbutton switches for control of multiple loads

Components of Digital Lighting Management integrated control system

Plug to other components using Cat 5e cables with RJ45 connectors eliminating wiring errors



Customizable buttons with LED status indicators

IR transceiver for wireless configuration and remote control

Plug n' Go automatic configuration and Push n' Learn for personalization

PROJECT
LOCATION/TYPE

Product Overview

Description

LMSW-100 Series Digital Wall Switches are low voltage devices for energy-saving manual on/off control of one or more loads from one or more locations. They are part of a Digital Lighting Management (DLM) system and can control any load(s) connected to DLM room controllers.

Operation

LMSW-100 Series Switches operate on Class 2 power supplied to a DLM local network by one or more room controllers. The switches send a digital signal for on or off whenever a pushbutton is pressed by a user. Plug n' Go automatic configuration assigns each load to a switch button upon system startup. If the number of buttons equals the number of loads, each button operates one load. If there are more loads than buttons, the last button controls multiple loads. Any extra buttons are unassigned. When multiple switches are installed, default operation is for multi-way control; each switch controls all of the loads on the system. Button assignments may be quickly reconfigured using Push n' Learn. Button configuration may be changed from load control to scene control using DLM configuration tools.

Features

- Hidden configuration button for easy access to Push n' Learn
- Digital Lighting Management components plug together on a free-topology Category 5e DLM local network
- Infrared (IR) transceiver for wireless configuration and control
- Sleek single gang devices fit decorator wall plates; 1-, 2-, 3-, 4-, and 8-button models
- Each button can control individual or multiple loads, or one scene; LED indicates status
- Switches may be used for multi-way control
- Five color options and custom engraving options; standard buttons may be replaced in the field
- RoHS compliant
- Qualifies for ARRA-funded public works projects

Button Features and IR Communications

An LED shows the status of the load(s) or scene assigned to each button on a switch. Switches are available with one, two, three, four or eight buttons. When an unassigned button is pressed, the LED will blink. Each switch may be personalized in the field with custom-engraved buttons. The IR transceiver in each LMSW-100 Series Digital Wall Switch allows two-way communication for both wireless system configuration and operation.

Applications

LMSW-100 Series Digital Wall Switches are recommended for virtually all applications, including offices, conference rooms and classrooms. They are ideal for any area where manual on/off control is desired. They are also perfect for applications requiring multi-way control. LMSW-100 Series Switches increase energy savings and improve the return on investment of any Digital Lighting Management system.


WattStopper
www.wattstopper.com
800.879.8585

Specifications


- Input voltage: 24VDC from DLM local network
- Current consumption: 5mA
- DLM local network connection: 2 RJ45 ports
- 1, 2, 3, 4 or 8 control buttons, each with LED status indicator
- Hidden configuration button to access Push n' Learn
- Infrared (IR) transceiver
- Operating conditions: for indoor use only; 32-131°F (0-55°C); 5-95% RH, non-condensing
- UL and cUL listed
- FCC part 15 compliant
- Five year warranty

Controls & Mounting

Product Controls, Dimensions and Models




Mounting

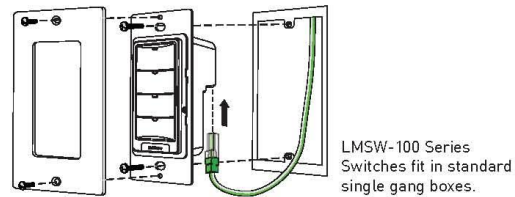

Connecting

Sample Connection Diagram with Multi-way Bi-level Control

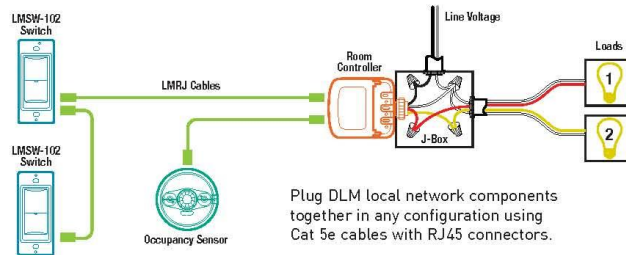

Ordering Information


Catalog No.	Color	Product Description	Catalog No.	Color	Product Description	
<input type="checkbox"/> LMSW-101-W	White	1-Button Digital Wall Switch	<input type="checkbox"/> LMSW-104-W	White	4-Button Digital Wall Switch	
<input type="checkbox"/> LMSW-101-LA	Light Almond		<input type="checkbox"/> LMSW-104-LA	Light Almond		
<input type="checkbox"/> LMSW-101-I	Ivory		<input type="checkbox"/> LMSW-104-I	Ivory		
<input type="checkbox"/> LMSW-101-G	Grey		<input type="checkbox"/> LMSW-104-G	Grey		
<input type="checkbox"/> LMSW-101-B	Black	<input type="checkbox"/> LMSW-104-B	Black	<input type="checkbox"/> LMSW-104-W-U	White	4-Button Digital Wall Switch, ARRA-compliant
<input type="checkbox"/> LMSW-101-W-U	White	<input type="checkbox"/> LMSW-104-L-U	Light Almond			
<input type="checkbox"/> LMSW-101-I-U	Light Almond	2-Button Digital Wall Switch	<input type="checkbox"/> LMSW-108-W	White	8-Button Digital Wall Switch	
<input type="checkbox"/> LMSW-102-W	White		<input type="checkbox"/> LMSW-108-LA	Light Almond		
<input type="checkbox"/> LMSW-102-LA	Light Almond		<input type="checkbox"/> LMSW-108-I	Ivory		
<input type="checkbox"/> LMSW-102-I	Ivory		<input type="checkbox"/> LMSW-108-G	Grey		
<input type="checkbox"/> LMSW-102-G	Grey	<input type="checkbox"/> LMSW-108-B	Black	<input type="checkbox"/> LMSW-108-W-U	White	8-Button Digital Wall Switch, ARRA-compliant
<input type="checkbox"/> LMSW-102-B	Black	<input type="checkbox"/> LMSW-108-I-U	Light Almond			
<input type="checkbox"/> LMSW-102-W-U	White	3-Button Digital Wall Switch	Note: Switches do not include face plates. Order decorator style plate separately.			
<input type="checkbox"/> LMSW-102-I-U	Light Almond					
<input type="checkbox"/> LMSW-103-W	White					
<input type="checkbox"/> LMSW-103-LA	Light Almond					
<input type="checkbox"/> LMSW-103-I	Ivory	3-Button Digital Wall Switch, ARRA-compliant	www.wattstopper.com 8 0 0 . 8 7 9 . 8 5 8 5			
<input type="checkbox"/> LMSW-103-G	Grey					
<input type="checkbox"/> LMSW-103-B	Black					
<input type="checkbox"/> LMSW-103-W-U	White					
<input type="checkbox"/> LMSW-103-I-U	Light Almond					

Pub. No. 30802 rev. 03/2010

Atrium brand | Legrand

www.wattstopper.com | 8 0 0 . 8 7 9 . 8 5 8 5

appendix d – lighting plans

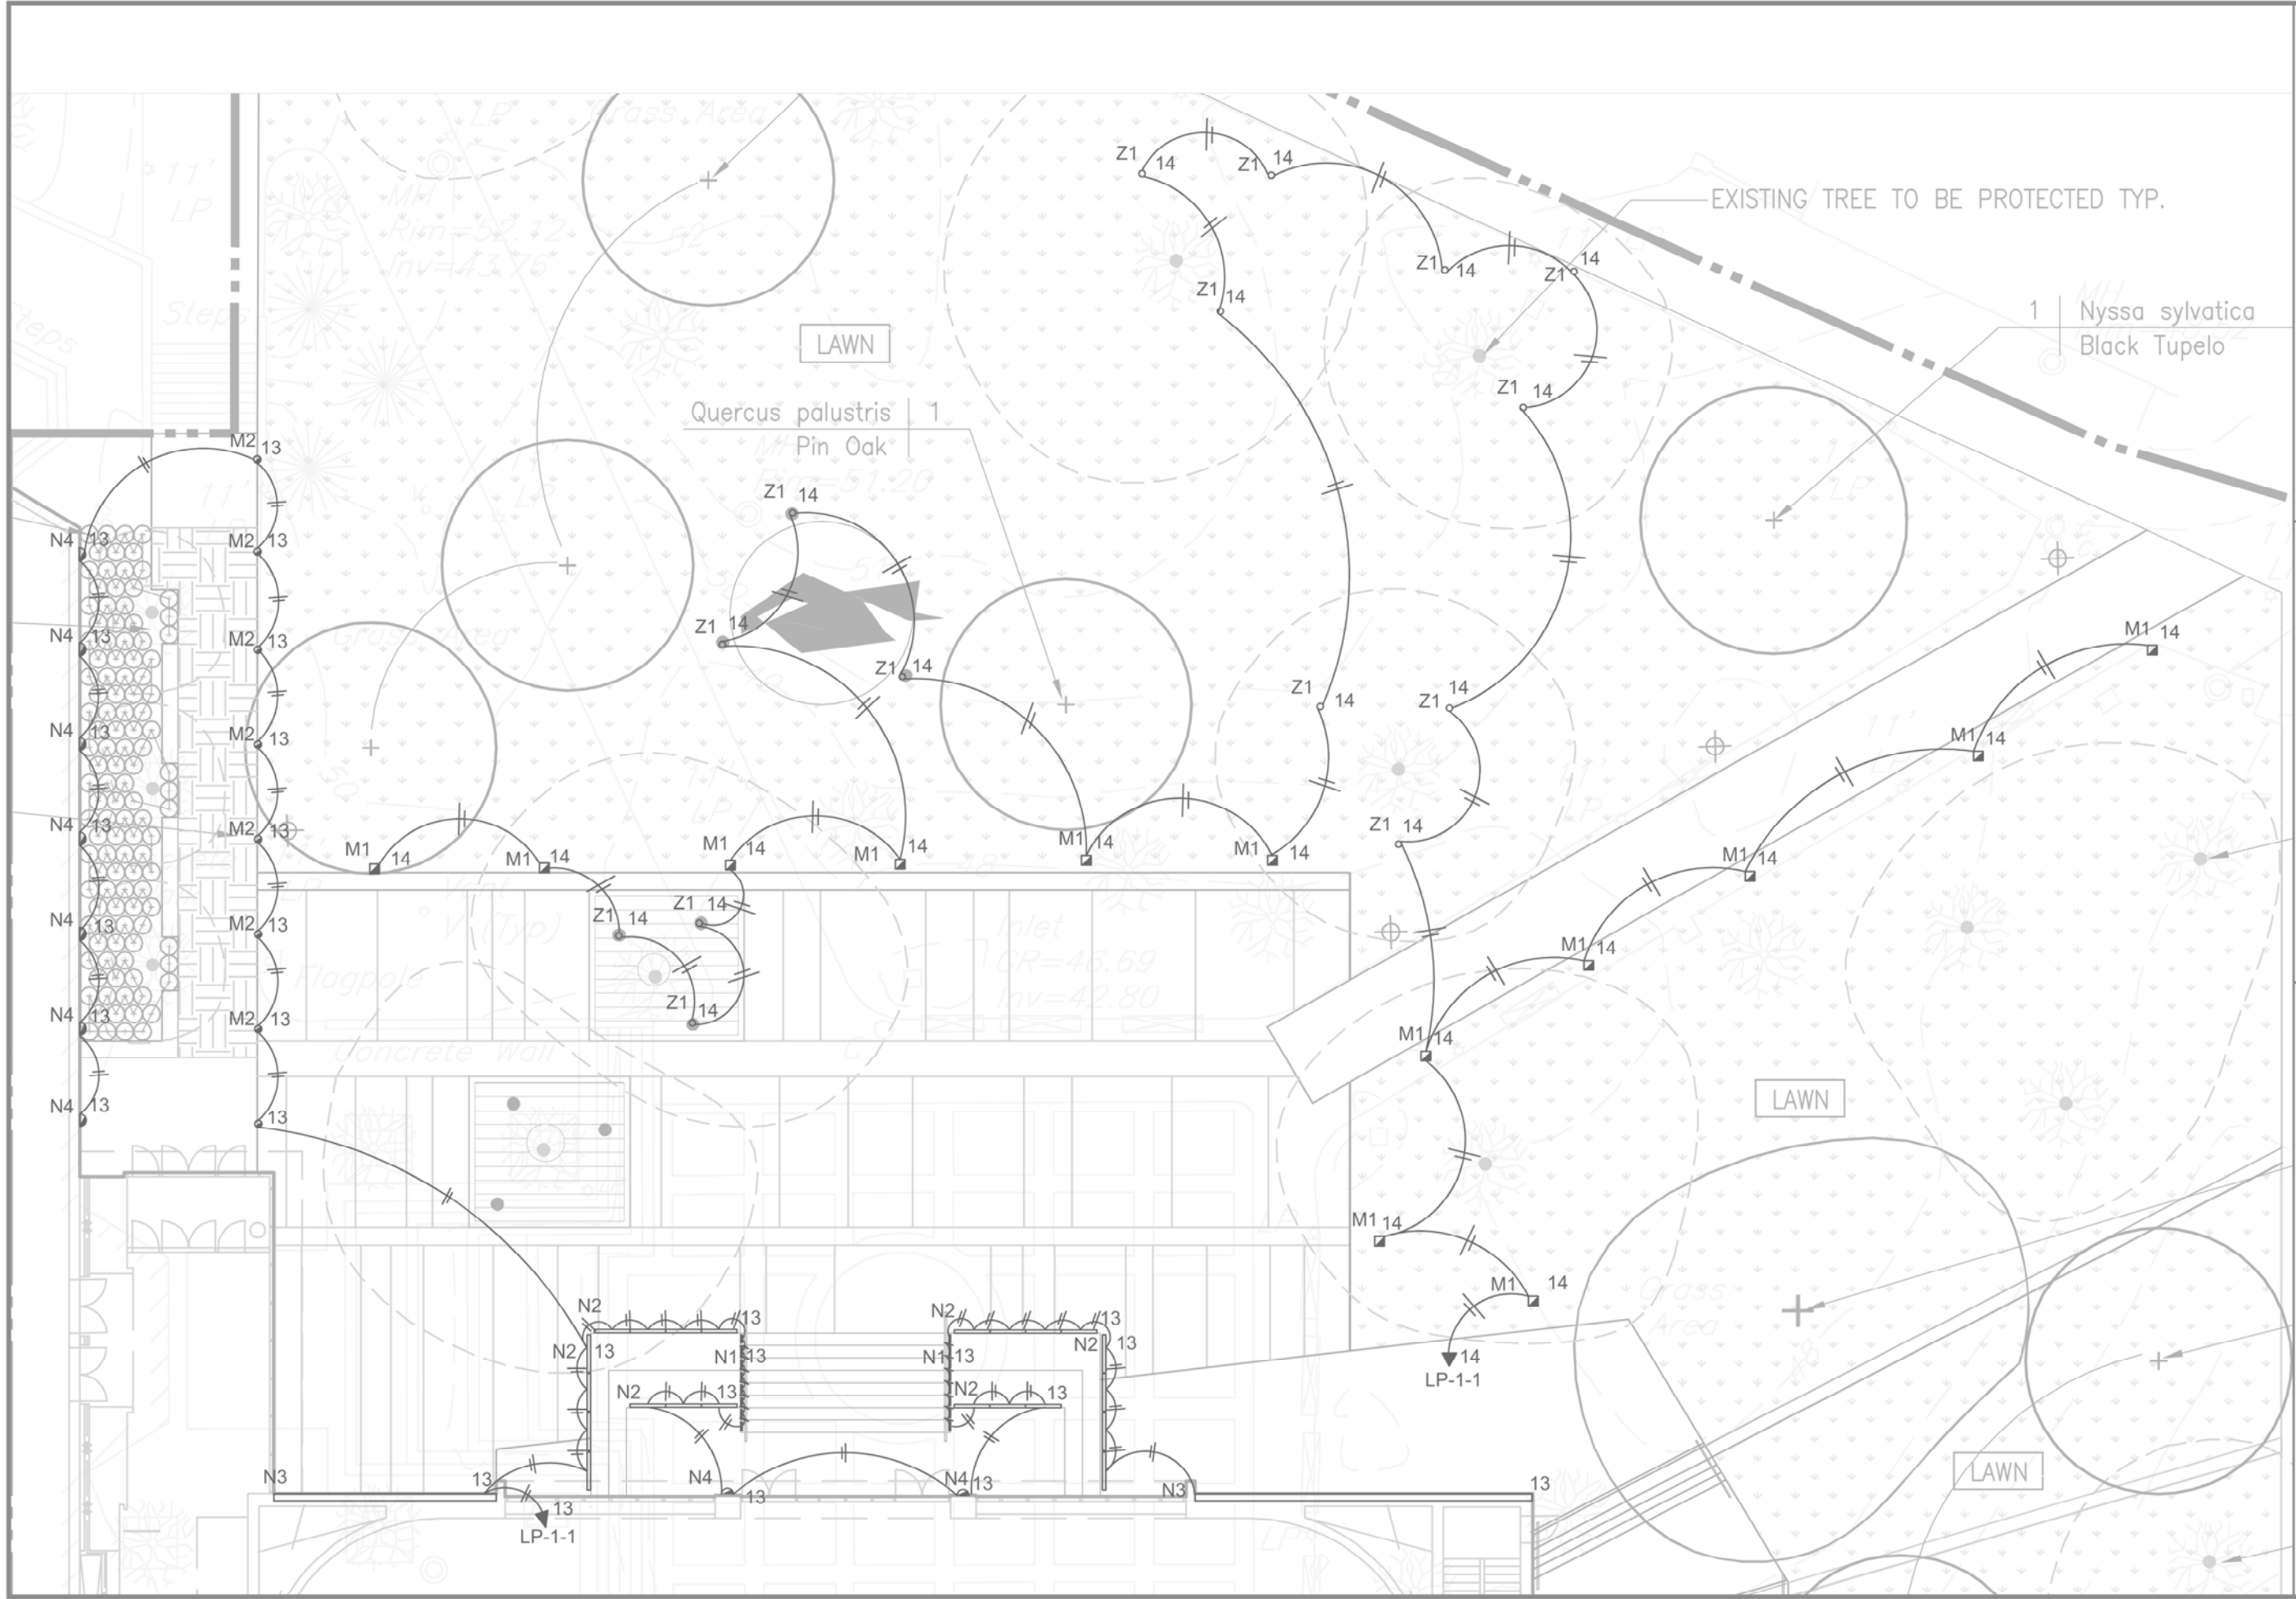


Fitness Center Third Floor
Lighting Plan 1/16" = 1"



 64 PLEASANT STREET, WATERTOWN MA 02472
 (617) 926-3100 FAX (617) 924-2748
 Architects
 Engineers
 Interior Designers
 Planners
EwingCole
 Cleveland • Irvine • Las Vegas • Philadelphia • Washington


Britnei Godusky | Lighting Electrical
 Final Senior Thesis Report
 Drexel University Recreation Center
 Philadelphia, PA

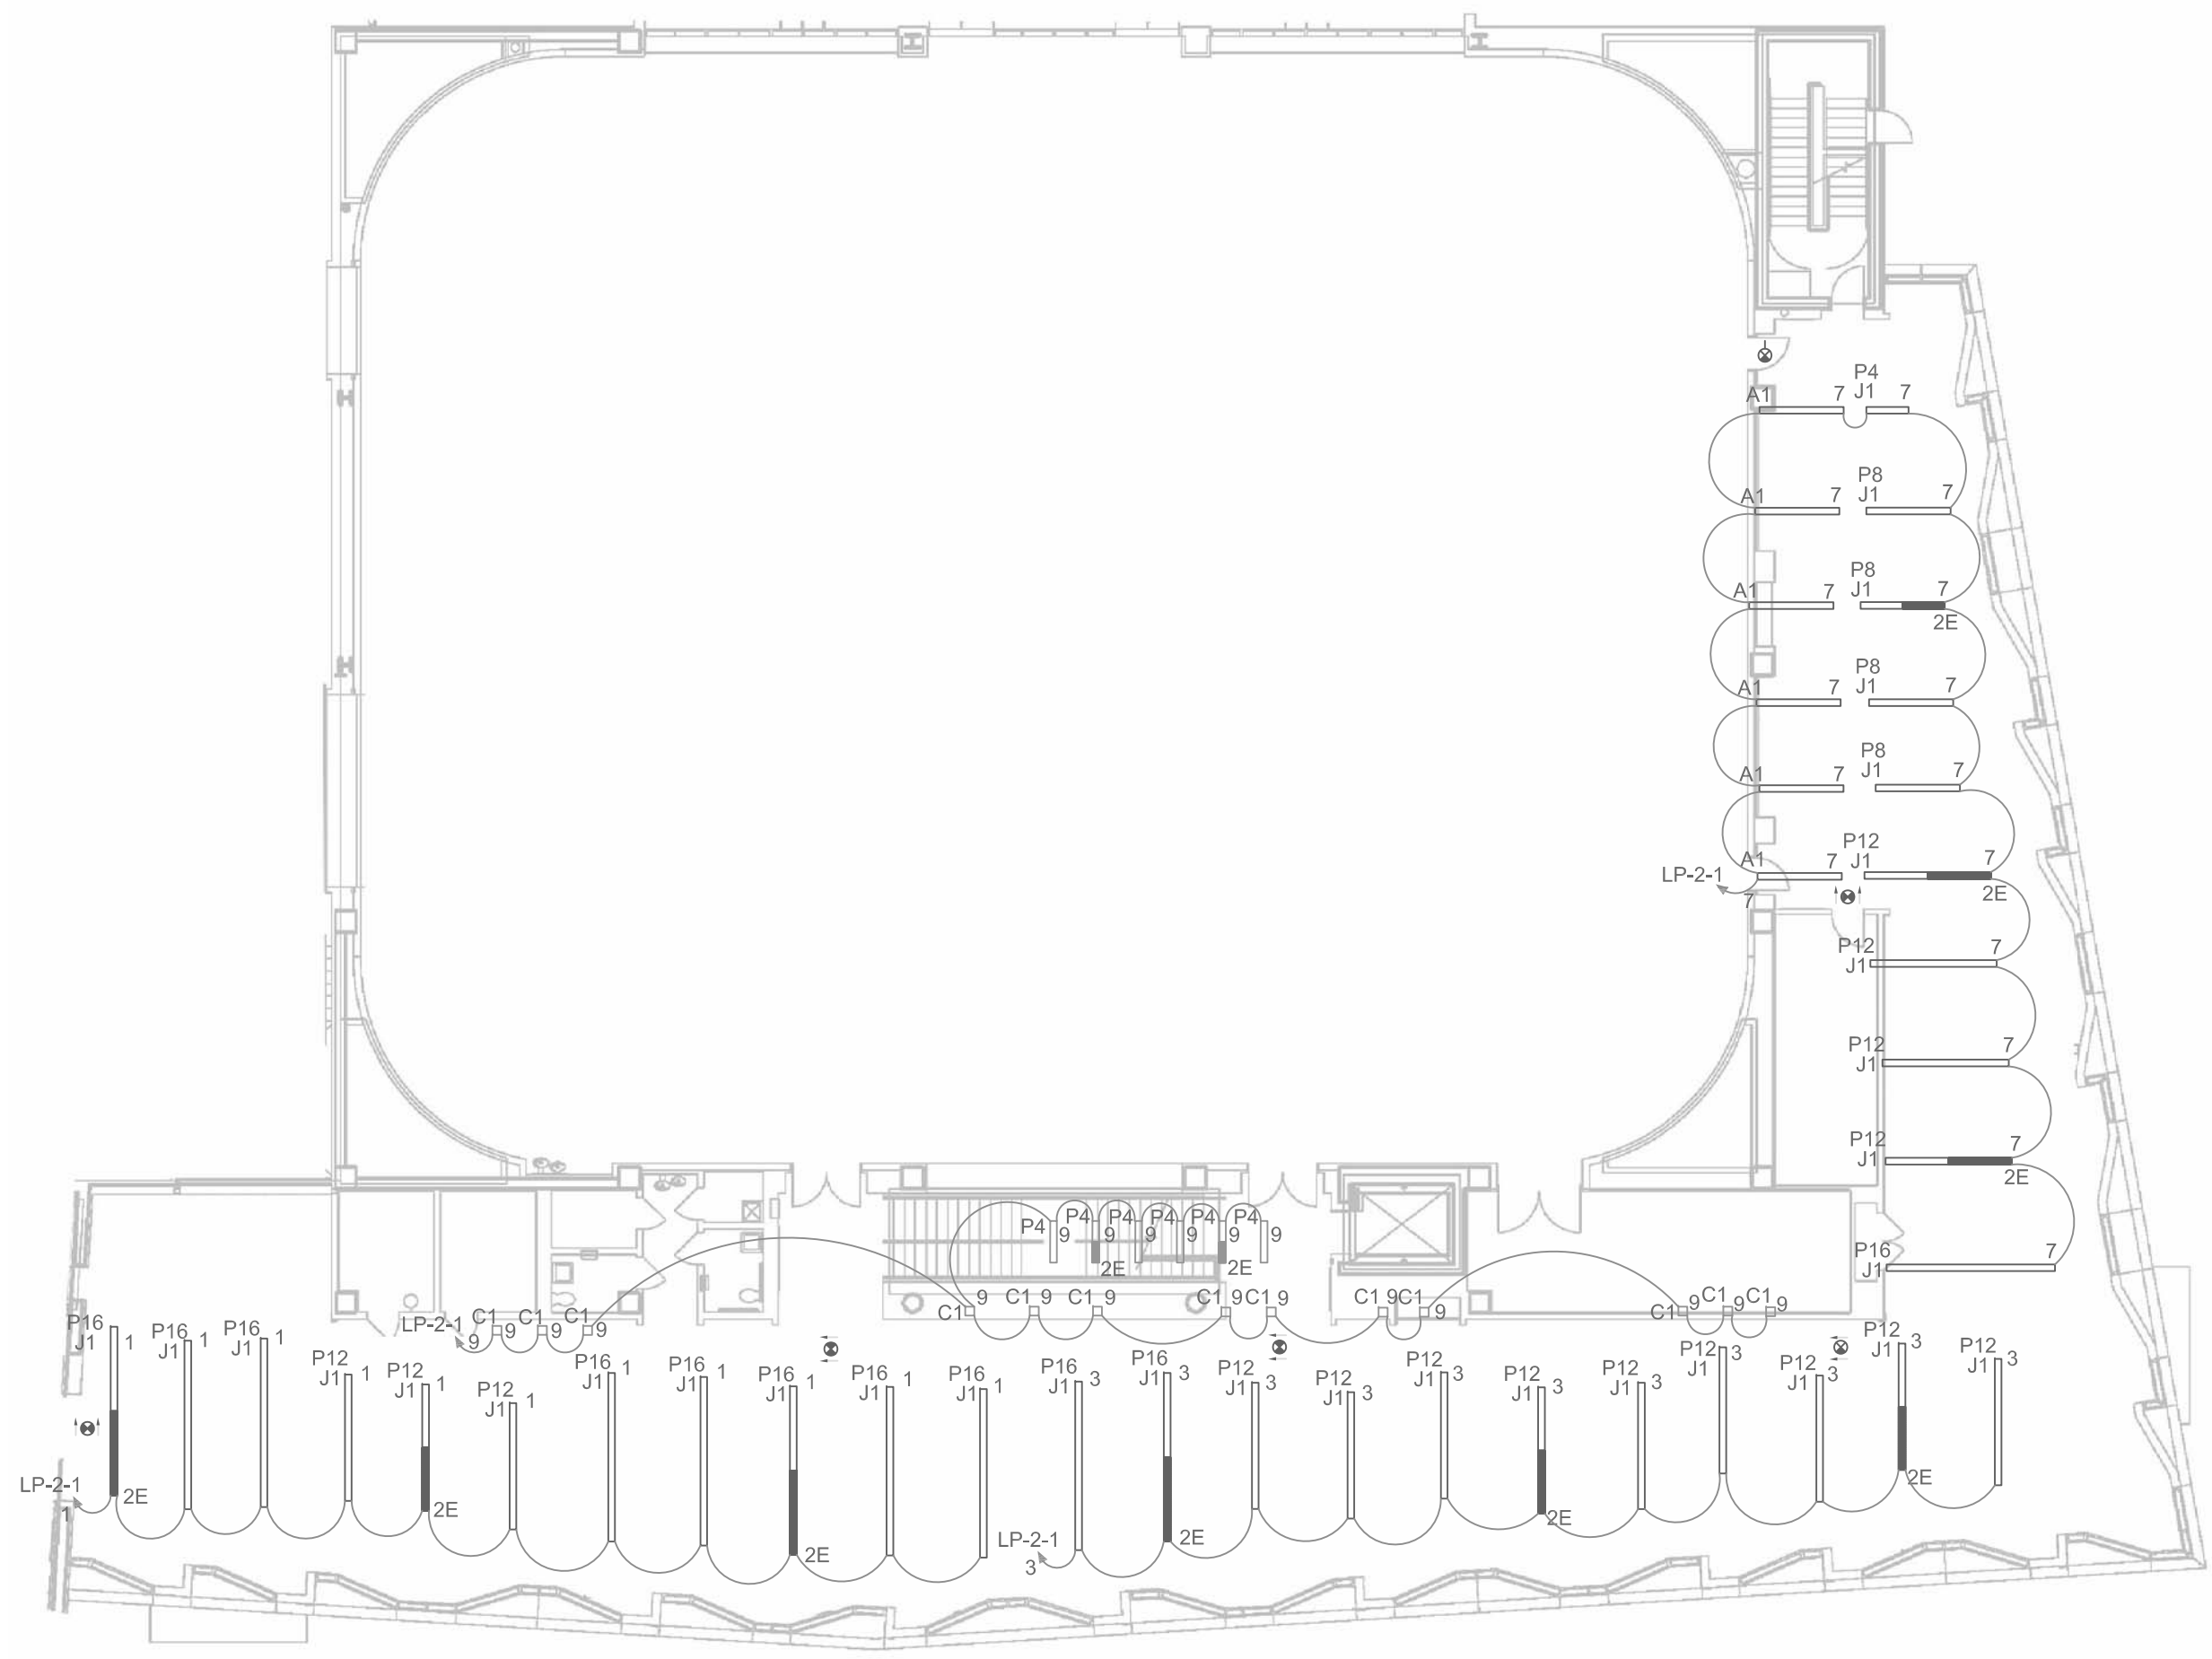

Fitness Center Second Floor
Lighting Plan 1/16" = 1"

ARCHITECT
SASAKI
 64 PLEASANT STREET, WATERTOWN MA 02472
 (617) 926-3300 FAX (617) 924-2748
 ENGINEERS
EwingCole
 INNOVATOR DESIGNERS
 PLANNERS
 Cleveland • Irvine • Las Vegas • Philadelphia • Washington

Britnei Godusky | Lighting Electrical
 Final Senior Thesis Report
 Drexel University Recreation Center
 Philadelphia, PA

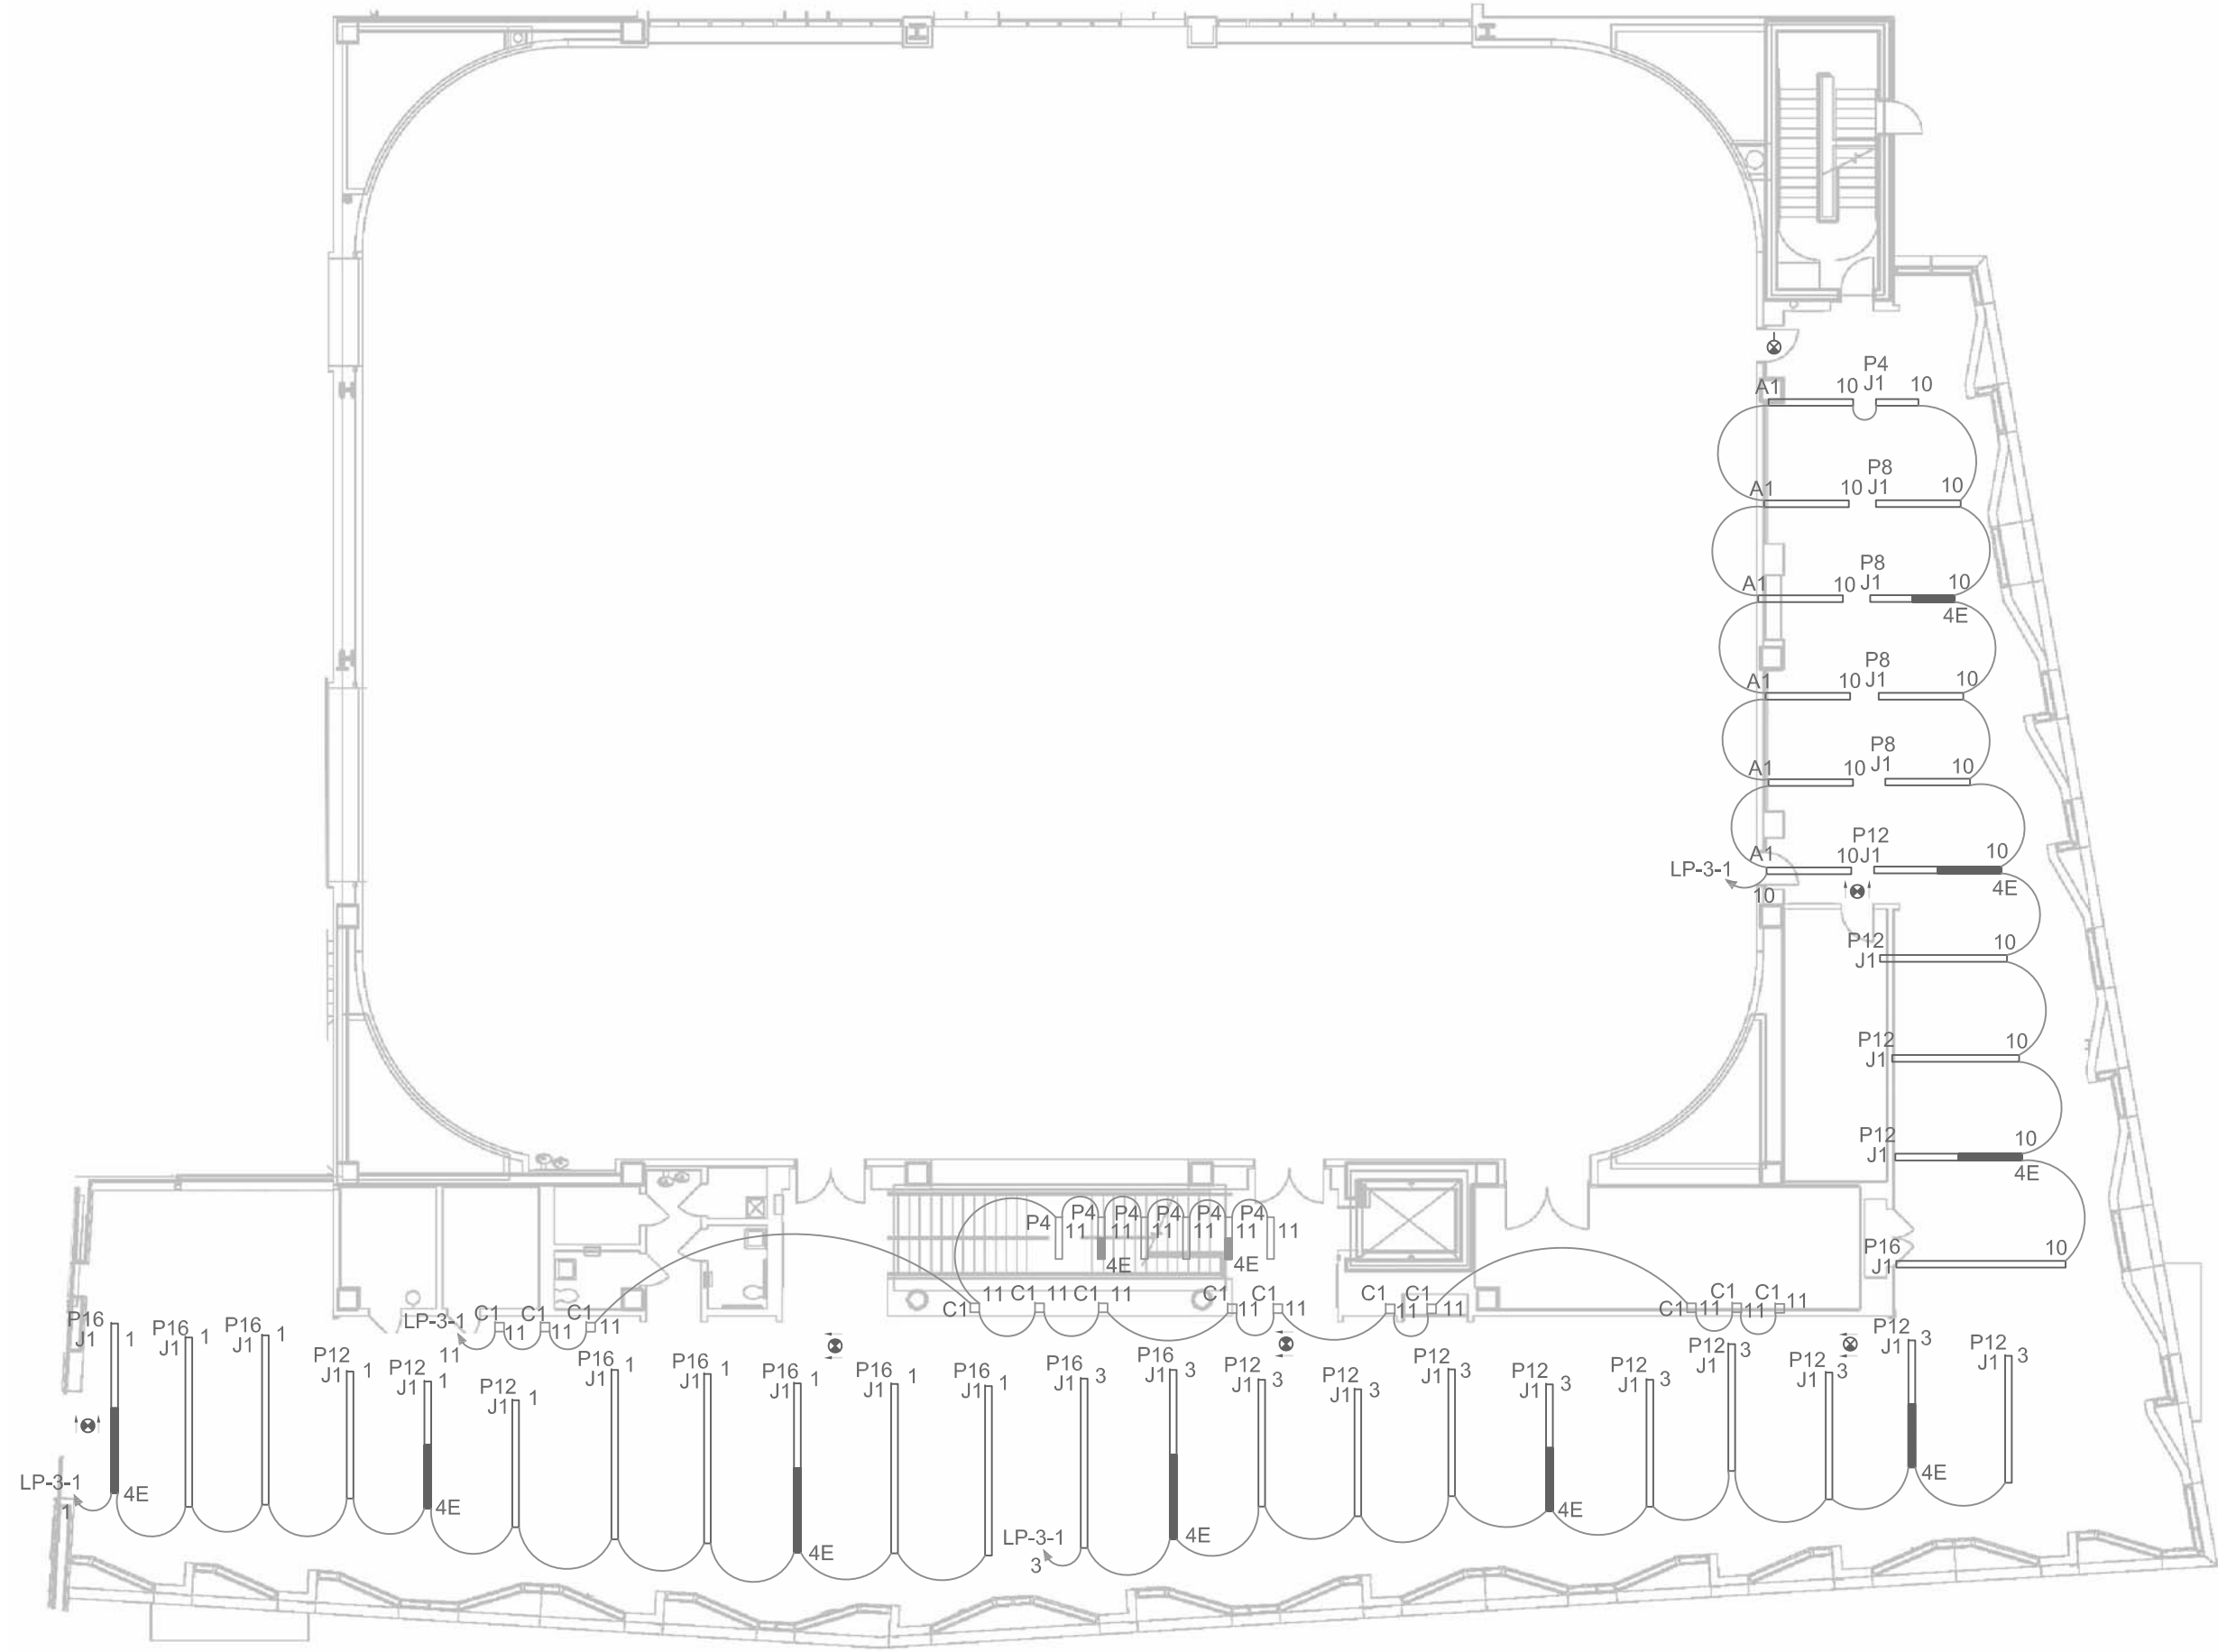


Fitness Center Third Floor
Lighting Plan 1/16" = 1"

ARCHITECT
SASAKI
64 PLEASANT STREET, WATERTOWN MA 02472
(617) 926-3300 FAX (617) 924-2748

EwingCole
Engineers
Interior Designers
Planners
Cleveland • Inire • Las Vegas • Philadelphia • Washington

Britnei Godusky | Lighting Electrical
Final Senior Thesis Report
Drexel University Recreation Center
Philadelphia, PA

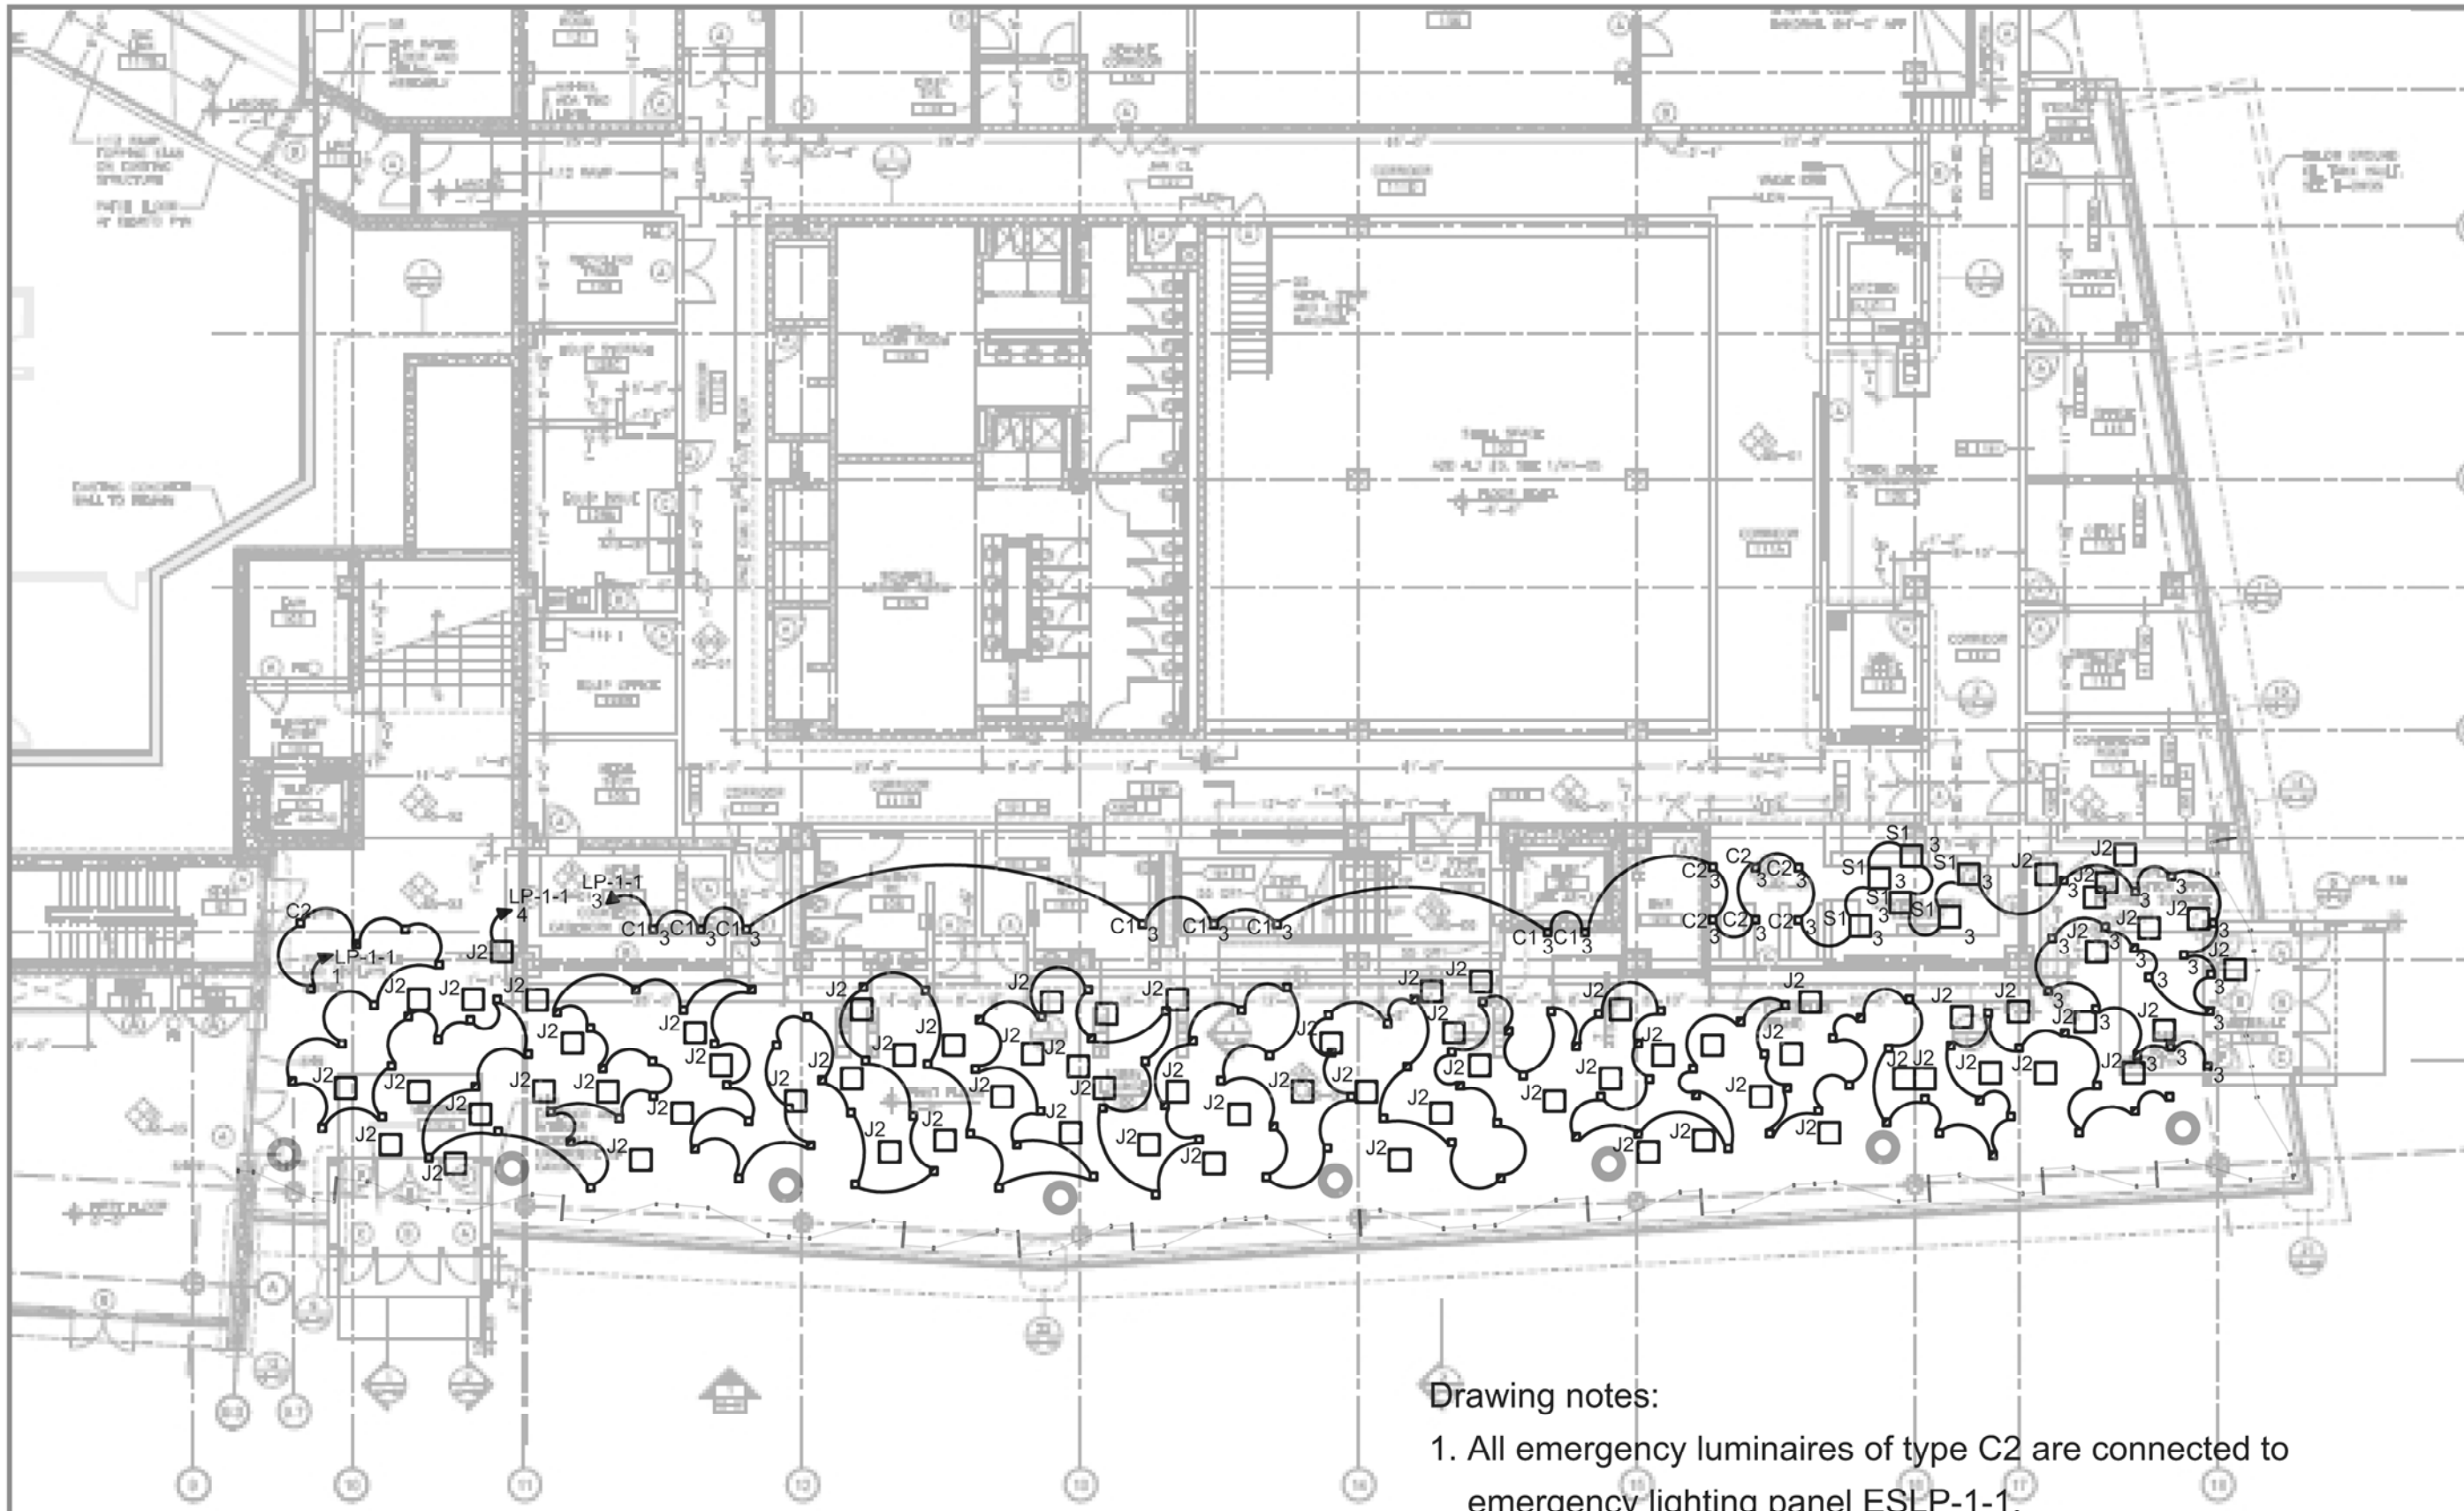

Drawing notes:

1. All emergency luminaires of type C2 are connected to emergency lighting panel ESLP-1-1.
2. All luminaires of type J2 are on lighting panel LP-1-1, circuit 4.
- ☞ 3. Luminaire type C2, typical of 147.


Lobby
Lighting Plan 1/16" = 1"

SASAKI
64 PLEASANT STREET, WATERTOWN MA 02472
(617) 926-3100 FAX (617) 924-2748

EwingCole

Architects
Engineers
Interior Designers
Planners
Cleveland • Irvine • Las Vegas • Philadelphia • Washington

Britnei Godusky | Lighting Electrical
Final Senior Thesis Report
Drexel University Recreation Center
Philadelphia, PA

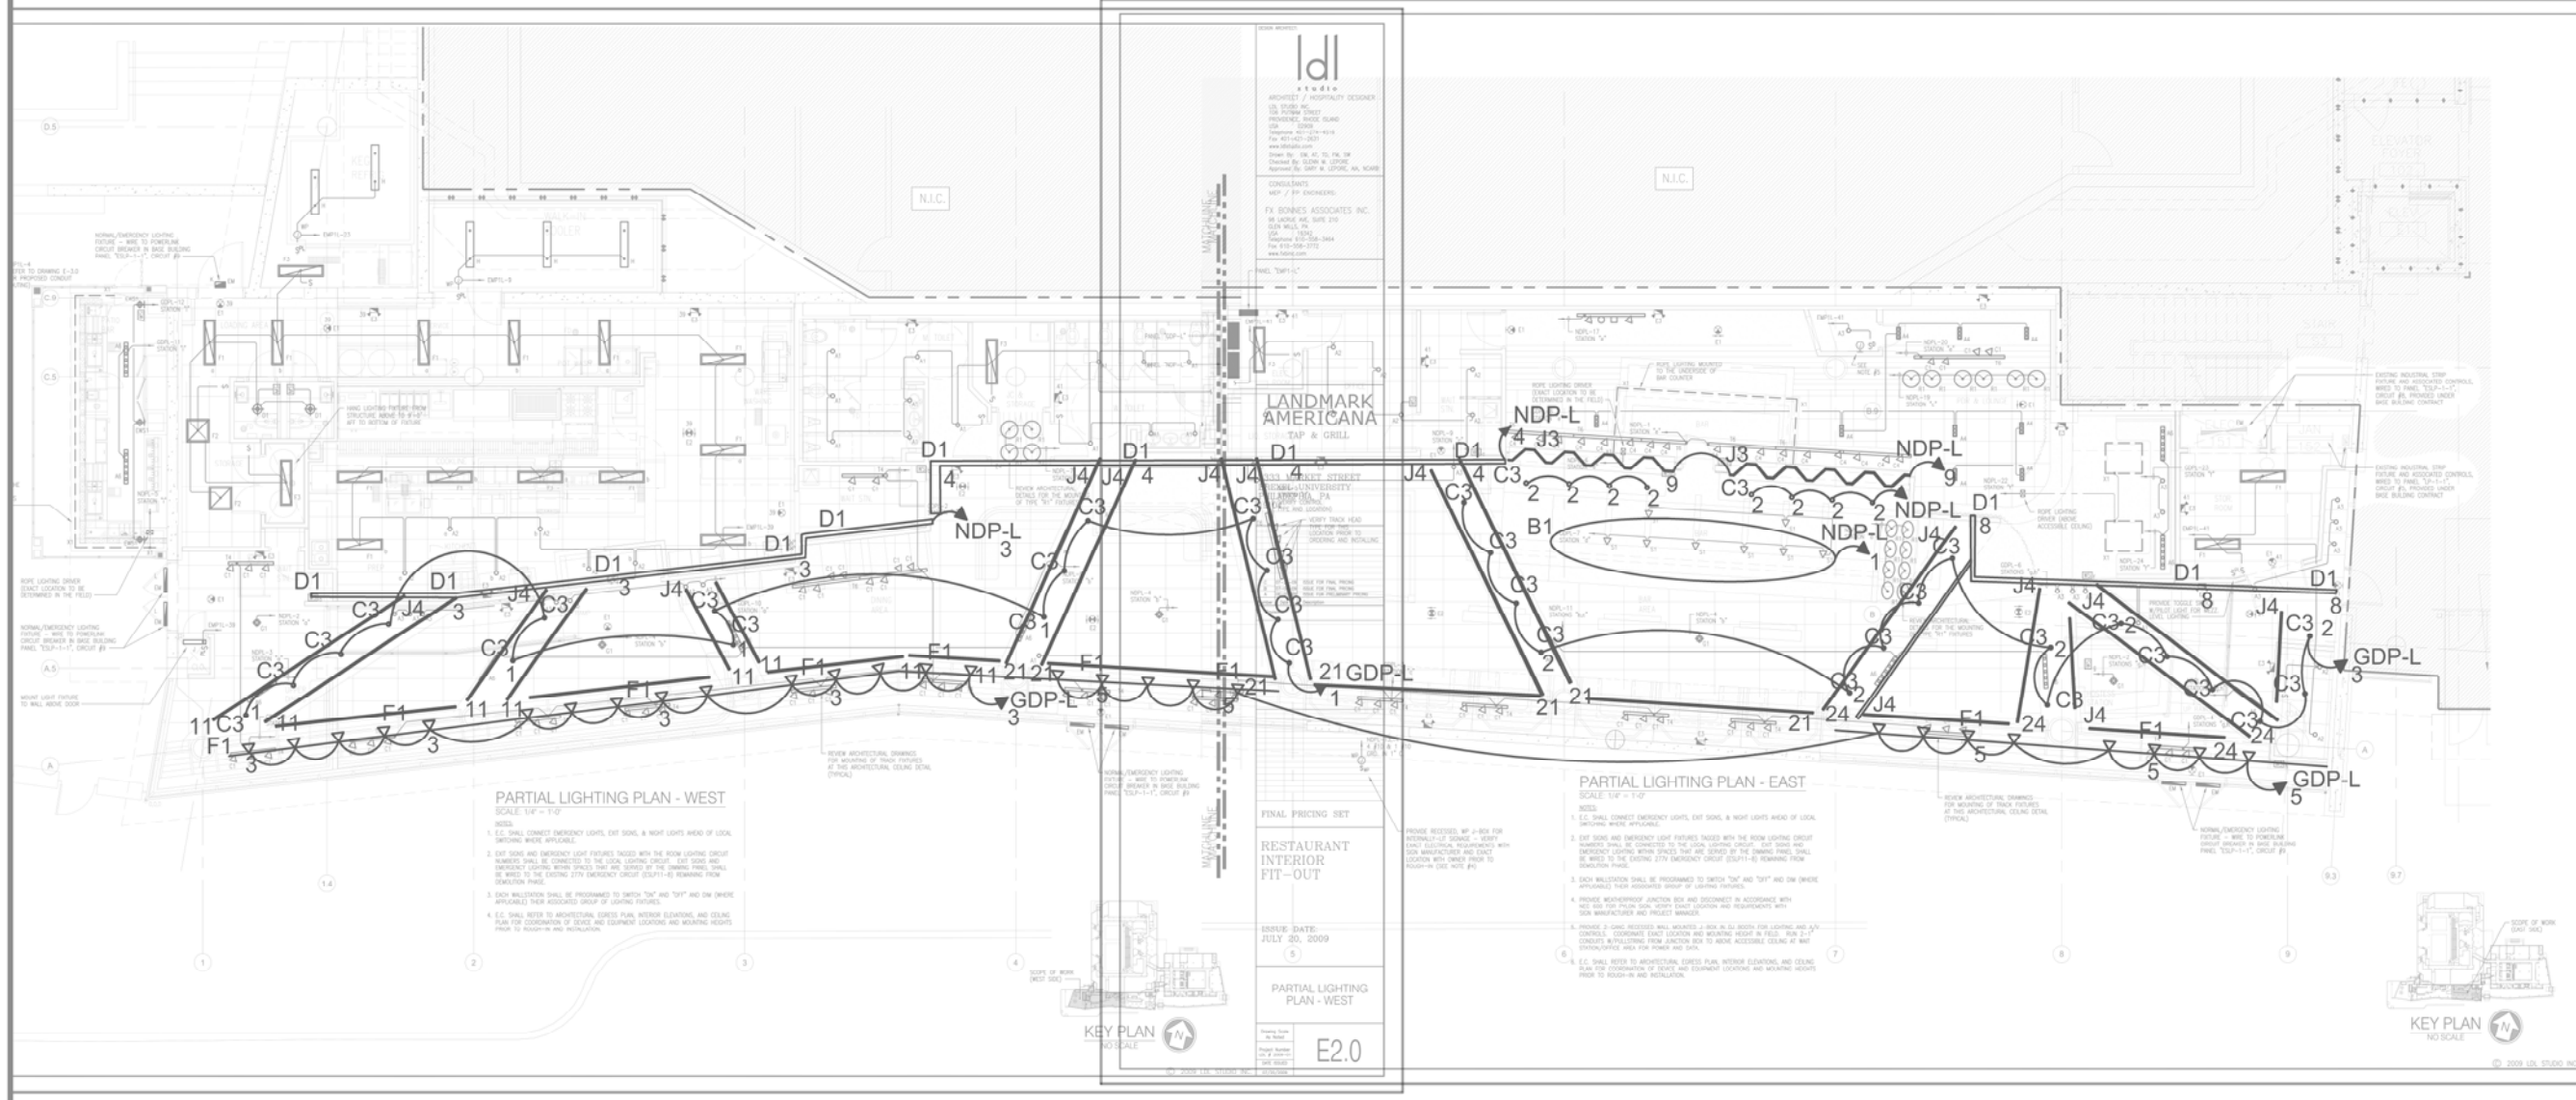

Restaurant
Lighting Plan 1/16" = 1"

64 PLEASANT STREET, WATERTOWN MA 02472
(617) 926-3300 FAX (617) 924-2748

EwingCole
Architects
Engineers
Interior Designers
Planners

Britnei Godusky | Lighting Electrical
Final Senior Thesis Report
Drexel University Recreation Center
Philadelphia, PA