

Appendix A - Luminaire Cutsheets

LINEA LED Specification

The simple linear form of LINEA combined with LED illumination provides a synergy of form and function. High-power LEDs provide a wide asymmetric distribution while generating no light above ninety degrees horizontal. Bollard housing and shaft are single-piece, fabricated from aluminum, and finished in finely textured paint. All hardware is stainless steel. Optional steel housing for high abuse environments available on request. Housing is hot-dip galvanized prior to being finished in finely textured paint. Standard colors; matte silver grey metallic or graphite grey. Special colors available.

CSA/US Certified for Wet Locations



LN950-LED-NW-UNV-D-034A-SG-DIM

Model	Lamp	Color Temperature	Volt	Mounting	Pole	Finish	Option
LN950	LED - Standard output	WW -3000K	UNV - 120-277V	D - Bollard	03SRA - 3' Straight Rectangular Aluminum	SG - Silver Grey	DIM - 0-10vDC Dimming
	HP/LED - High output	NW - 4000K				GG - Graphite Grey	EF - External Flange
						CC - Custom Color	N - None

Ordering Information

LINEA LED Specification

HOUSING

Single piece bollard consists of luminaire head and shaft fabricated from rectangular 6061 aluminum alloy with radiussed corners. Nominal wall thickness is 0.187" with cross-section of 7.5" x 3.5". LED light engine and driver are housed in self contained weather-proof powerpack enclosure within the bollard and removable with a single fastener. Lens is clear impact-resistant acrylic. LED array is thermally managed using convection and transmission of heat through the use of an aluminum heat sink and the luminaire housing. All hardware is stainless steel. Contact factory for hot-dip galvanized steel housing for high abuse environments.

OPTICS

LED light engine consists of five high output multi-chip LED arrayss fitted with prismatic lens optics to produce a uniform asymmetric light distribution pattern suitable for pathways and sidewalks. Luminaire emits zero uplight at or above 90 degrees horizontal and qualifies for use in LEED zones LZ1, LZ2, LZ3, and LZ4. Color temperature may be 3000K or 4000K.

ELECTRICAL

Standard output: Integral LED driver is housed in luminaire head and consumes 16 watts at 350 mA. Input voltage range is 120v - 277v AC, 50-60 Hz. LED driver shall be UL recognized.

High output: Integral LED driver is housed in luminaire head and consumes 33 watts at 700 mA. Input voltage range is 120v - 277v AC, 50-60 Hz. LED driver shall be UL recognized.

LED DELIVERED LUMENS / BUG RATING

Standard Output:

3000K - 568 delivered lumens / Bo-Uo-G1

4000K - 659 delivered lumens / Bo-Uo-G1

High Output:

3000K - 1061 delivered lumens / Bo-Uo-G2

4000K - 1216 delivered lumens / Bo-Uo-G2

NOTE : Due to rapid and continuous advances in LED technology, LED luminaire data is subject to change without notice and at the discretion of HessAmerica. Consult factory for more current technical data.

MOUNTING

Flangeless mounting is standard. Optional external flange mounting available on request.

FINISH

Standard finishes are finely textured dark grey, graphite grey, or matte silver gray metallic. Special colors available on request.

CERTIFICATION


CSA/US Certified for Wet Locations

WARRANTY


Limited product warranty period including LEDs is five years. Driver shall carry the manufacturer's limited warranty.

Additional information

Dimensions

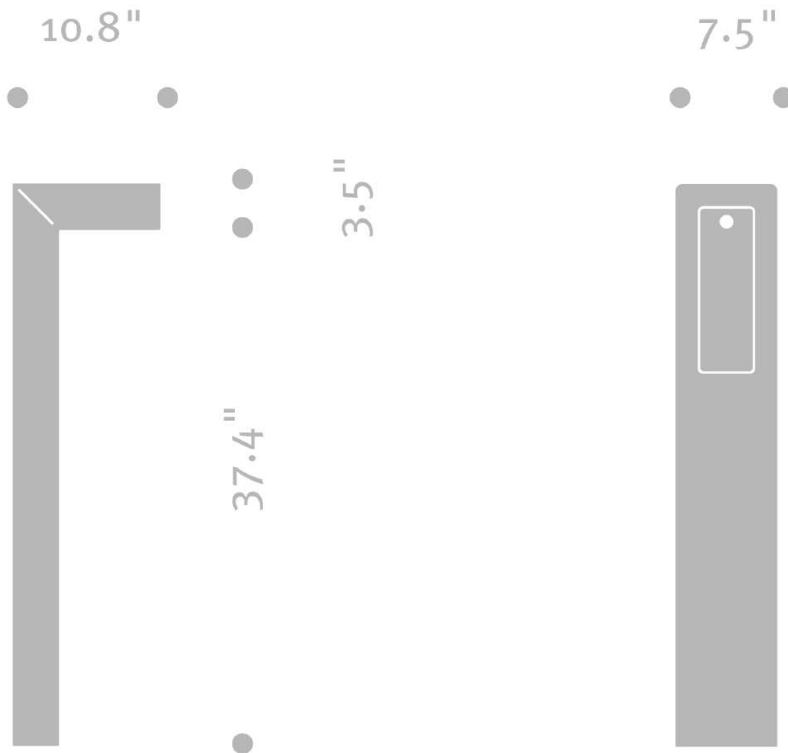

Mounting Detail

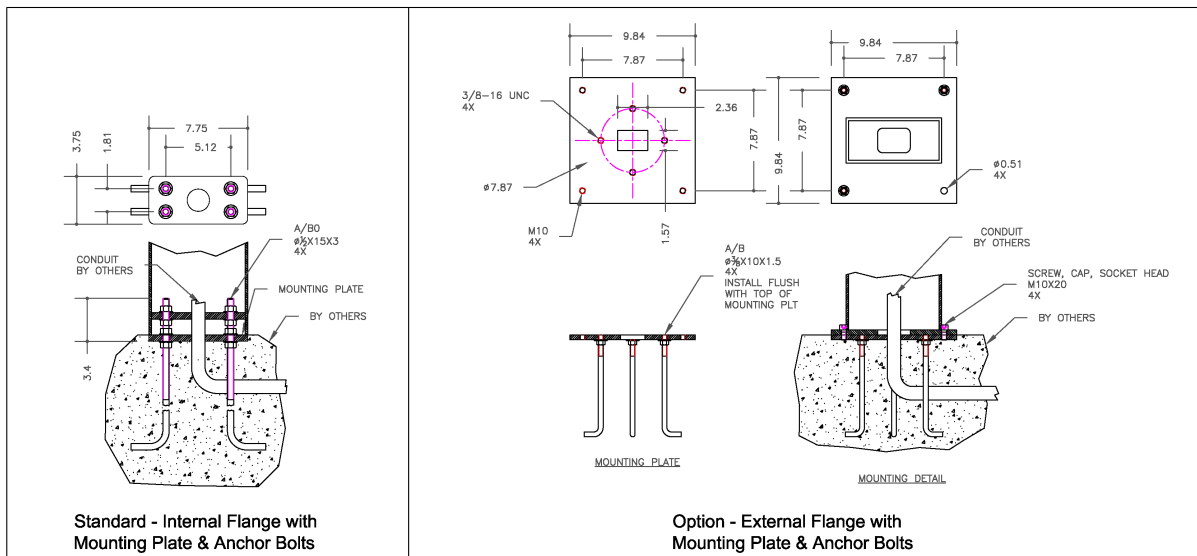

Specifications are subject to change without notification

HessAmerica > Products > Lighting Products > Illuminating Bollard > LINEA

http://www.hessamerica.com/Products/Lighting/Illuminating_Bollard/LINEA_/



■ Heidenheim . Germany
■ Heidenheim . Germany

LINEA



LINEA






LINEA


www.hessamerica.com/3111

LINEA . LED Illuminating Bollard

The simple linear form of LINEA combined with LED illumination provides a synergy of form and function. The housing contains an array of high-power LEDs arranged to provide a wide asymmetric distribution while generating no light above ninety degrees horizontal. Bollard housing and shaft are single-piece, fabricated from aluminum, and finished in finely textured paint. All hardware is stainless steel. Optional steel housing for high abuse environments available on request. Steel housing is hot-dip galvanized prior to being finished in finely textured paint. Standard colors; matte silver grey metallic or graphite grey. Special colors available. CSA certified for Wet Locations.

Model	Height	Lamp
LN950	40.5"	LED

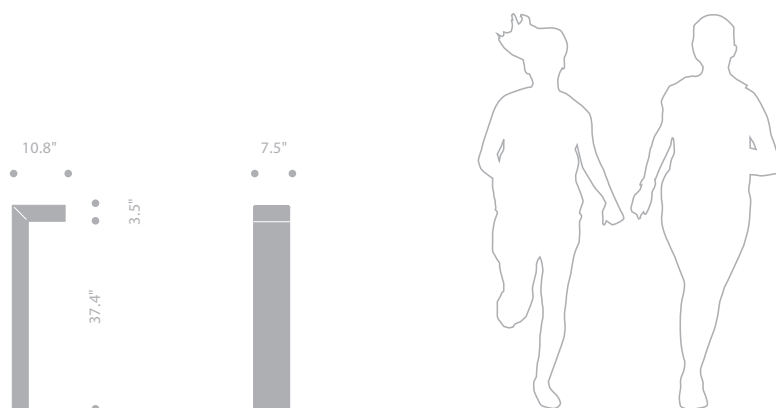



BASYS™ LED II

Applications: The BASYS LED II family has a broad range of distributions, outputs, and finishes. Whether you are looking to get high light levels or a sleek, minimalist appearance, BASYS LED II has you covered. Perfect for offices, foyers, hallways, conference rooms, or educational areas.

Type: _____

Project: _____

Recessed Round
Downlight

6"

online
Find it Fast

1124



IBEW Union Made

BASYS LED II HOUSING

BR6DLED2-N-46W-835-M5-DH2

FIXTURE	TRIM/CEILING TYPE	WATTAGE/OUTPUT	LED MODULE	DISTRIBUTION	DRIVER	OPTIONS
BASYS LED II Round 6" Recessed Downlight Direct White LED CRI = 85 typical	N Standard Flange F Flangeless	18W 1400 lm	827 2700K, 85 typical CRI	M5 Medium Distribution, 55° cutoff W5 Wide Distribution, 55° cutoff	D_* Standard 0-10V Dimming Driver, 10%	EM_* Standby Battery Pack, 5W, 290lm
		26W 2150 lm	830 3000K, 85 typical CRI 835 3500K, 85 typical CRI 3.5-step MacAdam		DH_* Lutron HiLume A Series, 1%	EMH_* Standby Battery Pack, 22W, 1200lm F Fusing
		37W 2800 lm			DD_* DALI Dimming, 0.1%	
		46W 3200 lm				
		<i>For exact Lumen Output and Wattage consumption data, please consult LM-79 reports.</i>		<i>* Specify "1" for 120V or "2" for 277V.</i>		
		<div>Trim Finish Multiplier for Lumen Output Clear Specular 1.10 Clear Semi-Specular 1.00 Matte 0.87 White Matte 0.80</div>	<div>CCT Multiplier for Lumen Output 2700K 0.87 3000K 0.93 3500K 1.00</div>			

BASYS LED II TRIM

BR6DLED2

FIXTURE	TRIM/CEILING TYPE	DISTRIBUTION	REFLECTOR FINISH	FLANGE FINISH	LENS
BASYS LED II Round 6" Recessed Downlight	N Standard Flange F Flangeless	M5 Medium Distribution, 55° cutoff W5 Wide Distribution, 55° cutoff	CL Clear Specular	N Natural W White C* Custom F Flangeless	SL Solite Lens
			CS Clear Semi-Specular		SB Sandblasted Lens
			MT Matte		CA Clear Tempered Glass Lens Solite Lens is standard.
			WH White Matte		
			CC* Custom		
			<div>* For Custom Colors, please specify RAL # _____</div>		


BASYS LED II MOUNTING

OPTIONS


- 9930** Set of two 27" C-Channel mounting bars
- 9952** Set of two 52" C-Channel mounting bars
- 9956** Set of two 28" 10 ga. one-piece universal mounting bars



FLANGED VIEWS

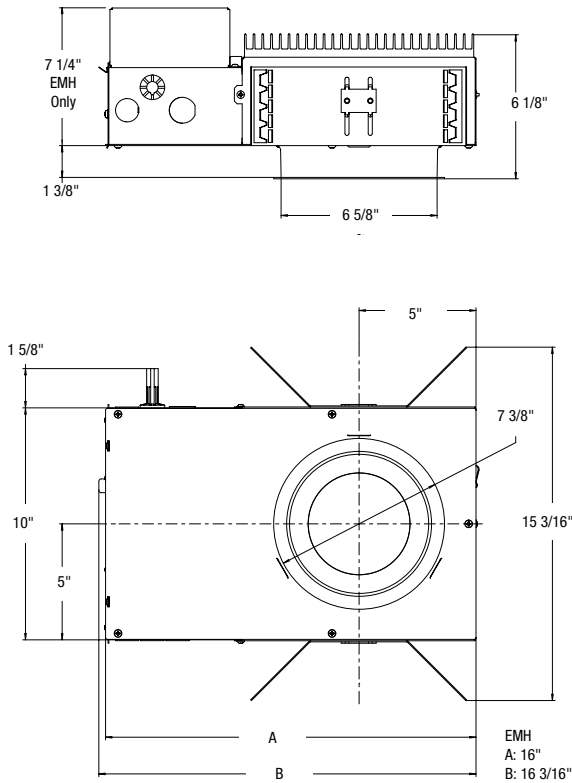

FLANGELESS VIEWS

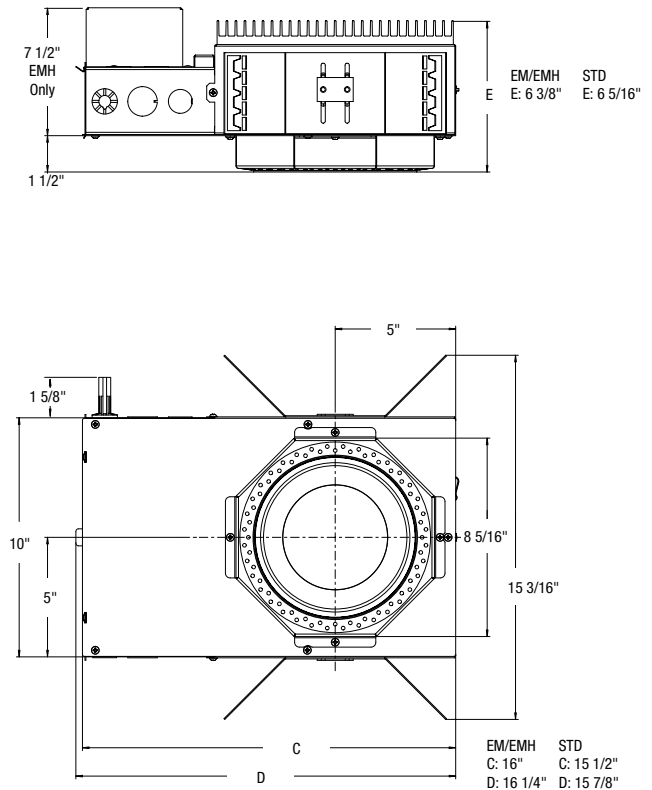

A ceiling cutout template will be provided with each fixture



IBEW Union Made

Rated for Wet Locations

1) Housing - Enclosed housing is of 20-gauge galvanized steel. Shallow integral heat sink rests on top of the housing. 20-gauge aluminum plaster frame has a fixed throat of 1 3/8" to accommodate double-thickness plasterboard.

Thru Wire Box Oversized junction box is 16-gauge galvanized steel.

CSA listed for thru wiring (4 in and 4 out at 90°C) and has 7/8" and 1 1/8" knockouts.

Driver door provides access to driver and thru wire box through fixture aperture.

2) Wattage & CCT - Wattage options are 18W, 26W, 37W, or 46W. Available in 2700K, 3000K, or 3500K color temperatures. 3.5-step MacAdam.

3) Dimming - Basys LED II is available with 0-10V Dimming driver standard, with 10% dimming. 1% dimming is available with the Lutron HiLume A series. 0.1% dimming is available with a DALI driver. For non-dimming installations, the standard 0-10V dimming driver will be provided, and the dimming control wires can simply be capped off at installation.

Compatible 0-10V Dimmers:

- Lutron DDTV
- Lutron NTFTV
- LEVITON IP710-DLZ
- Wattstopper/Legrand ADF-120277

4) Driver - The driver can be removed either through the aperture or back of thru wire box for replacement and ease of wire connection.

Standard Quick Disconnect for driver module allows driver to be removed completely from housing without tools. It offers quick connection to building power supply.

5) Standby Battery Pack - EM = 5W, 290lm
EMH = 22W, 1200lm

6) Mounting - Rigid mounting brackets provide 3" vertical adjustment from inside aperture and plenum side of housing. Brackets accommodate One-Piece Universal Mounting Bar (mounting bars ordered as an optional accessory).

7) Reflectors - Upper Reflector - Reflector is anodized aluminum of high-specularity, vacuum metalized, designed to provide highest efficiency and effective beam distribution. The lens obscures direct view of the LEDs.

Lower Reflector - Compound parabolic curve of lower reflector provides optical and physical and 55° cutoff. Aluminum anodized lower reflector is designed to provide iridescent-free finish. Solite lens included.

Lower Reflector Finishes -

Specular - highly polished post-anodized finish with dark light appearance. Precise light distribution and glare limitation provides highest lumen output.

Semi-Specular - architectural visual identity is provided while maintaining precise directionality of light.

Matte - soft, diffuse, evenly illuminated surface provides a congruous appearance between the downlight and the ceiling.

White - Zumtobel White painted finish blends well with typical White painted ceilings.

8) Life - 50,000 hours rated life. L70.

9) Weight - 4" STD = 8.75 lbs.
4" EM = 11.25 lbs.


BASYS LED II

6" Round Downlight, 18W, 3500K, 80 CRI

Medium Beam, 55° cutoff

1535 lumens, 18.8W, 81.6 lm/W

Candela Distribution

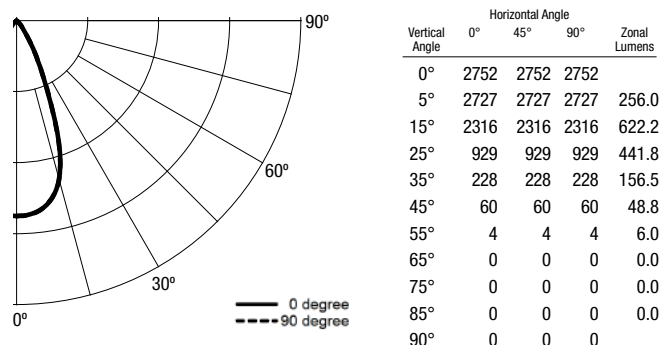

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	
0		119	119	119	119	116	116	116	116	111	111	111	106	106	106	
1		336	427	509	583	346	430	506	575	436	501	561	441	497	548	
2		289	352	405	449	295	354	403	445	357	400	437	361	398	430	
3		254	299	333	361	258	300	332	359	302	331	355	304	329	350	
4		227	259	282	300	229	259	281	298	260	280	296	261	279	294	
5		205	227	243	255	206	228	243	254	228	242	253	229	241	251	
6		186	202	213	221	187	202	213	220	203	212	219	203	212	218	
7		171	182	189	194	171	182	189	194	182	188	193	182	188	192	
8		157	165	169	172	158	164	169	172	164	169	172	164	168	171	
9		146	150	153	155	146	150	153	154	150	152	154	150	152	154	
10		135	138	139	140	135	138	139	140	137	139	139	137	138	139	


BASYS LED II

6" Round Downlight, 18W, 3500K, 80 CRI

Wide Beam, 55° cutoff

1547 lumens, 18.8W, 82.3 lm/W

Candela Distribution

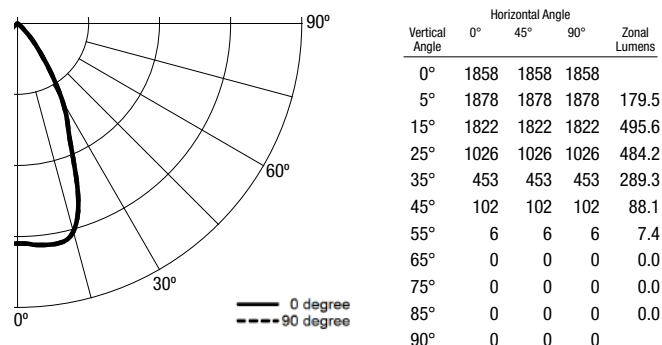

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	
0		119	119	119	119	116	116	116	116	111	111	111	106	106	106	
1		320	405	481	550	329	408	479	543	413	474	530	418	470	518	
2		273	331	378	418	279	332	377	415	335	374	408	338	371	401	
3		238	278	308	332	242	278	307	330	280	305	327	281	304	323	
4		211	238	258	273	213	238	257	272	239	256	269	240	255	267	
5		189	207	220	229	190	207	220	229	207	219	227	208	218	226	
6		171	183	191	197	171	183	190	196	183	190	195	182	189	194	
7		155	163	167	171	155	163	167	171	162	167	170	162	166	169	
8		142	146	149	150	142	146	148	150	146	148	150	145	148	149	
9		131	132	133	134	131	132	133	133	132	132	133	131	132	133	
10		121	120	120	120	121	120	120	120	120	120	119	119	119	119	


BASYS LED II

6" Round Downlight, 26W, 3500K, 80 CRI

Medium Beam, 55° cutoff

2251 lumens, 26.5W, 84.9 lm/W

Candela Distribution

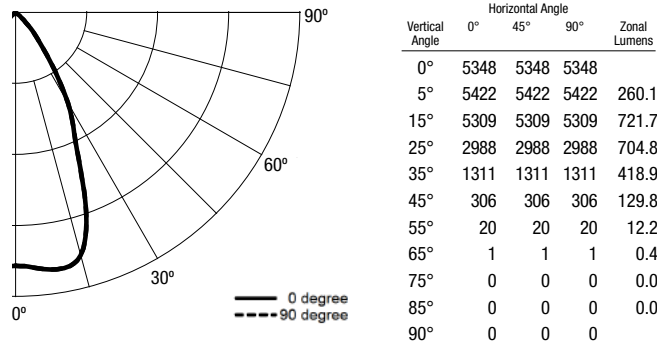

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	
0		119	119	119	119	116	116	116	116	111	111	111	106	106	106	
1		194	225	253	279	196	225	251	275	225	247	268	224	243	261	
2		168	185	200	212	168	185	199	210	184	196	206	183	193	203	
3		148	157	163	169	148	156	162	168	155	161	165	153	159	163	
4		132	135	137	139	131	134	136	138	133	135	137	132	134	135	
5		119	118	117	117	118	117	117	116	116	116	115	115	115	115	
6		108	104	102	100	107	104	101	100	103	101	99	101	100	99	
7		99	93	90	87	98	93	89	87	92	89	86	91	88	86	
8		91	84	80	77	90	83	79	76	83	79	76	82	78	76	
9		84	76	71	68	83	76	71	68	75	71	68	74	70	68	
10		78	70	64	61	77	69	64	61	68	64	61	68	64	61	


BASYS LED II

6" Round Downlight, 26W, 3500K, 80 CRI

Wide Beam, 55° cutoff

2251 lumens, 26.5W, 84.9 lm/W

Candela Distribution

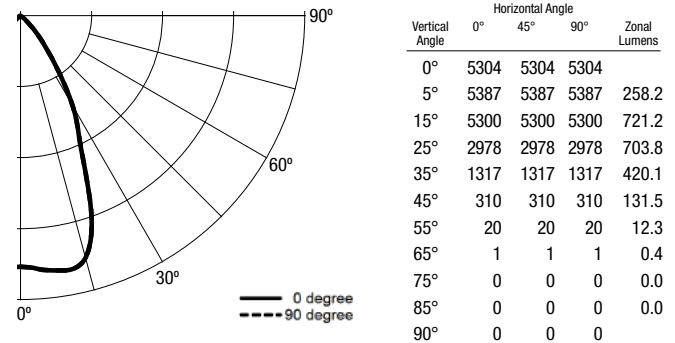

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	
0		119	119	119	119	116	116	116	116	111	111	111	106	106	106	
1		194	225	253	278	196	225	251	275	224	247	268	224	243	261	
2		168	185	200	212	168	185	198	210	184	196	206	183	193	203	
3		148	156	163	169	147	156	162	167	154	160	165	153	159	163	
4		132	135	137	138	131	134	136	138	133	135	136	131	133	135	
5		119	118	117	117	118	117	117	116	116	115	115	115	114	114	
6		108	104	102	100	107	104	101	100	102	100	99	101	100	98	
7		99	93	89	87	98	93	89	87	91	88	86	90	88	86	
8		91	84	79	76	90	83	79	76	82	79	76	81	78	76	
9		84	76	71	68	83	76	71	68	75	71	68	74	70	67	
10		78	69	64	61	77	69	64	61	68	64	61	68	63	60	


BASYS LED II

6" Round Downlight, 37W, 3500K, 80 CRI

Medium Beam, 55° cutoff

2892 lumens, 36W, 80.3 lm/W

Candela Distribution

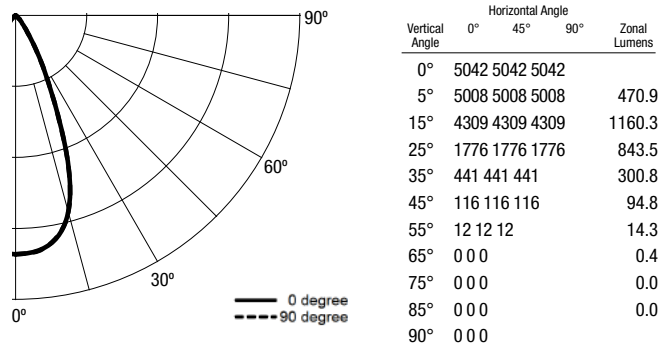

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106		
1	335	425	507	580	345	429	504	573	434	500	559	440	495	546		
2	288	351	403	447	294	353	401	443	356	399	436	359	396	428		
3	253	297	332	359	257	298	331	357	300	329	353	302	327	349		
4	226	257	280	298	228	258	280	297	259	279	294	260	278	292		
5	204	226	242	253	205	226	241	253	227	241	251	227	240	249		
6	185	201	212	219	186	201	211	219	201	211	218	202	210	217		
7	170	180	188	192	170	180	187	192	180	187	191	180	186	191		
8	156	163	168	171	157	163	168	171	163	167	170	163	167	170		
9	145	149	152	153	145	149	151	153	149	151	153	148	151	152		
10	135	137	138	139	134	136	138	138	136	137	138	136	137	138		


BASYS LED II

6" Round Downlight, 37W, 3500K, 80 CRI

Wide Beam, 55° cutoff

2812 lumens, 34W, 82.7 lm/W

Candela Distribution

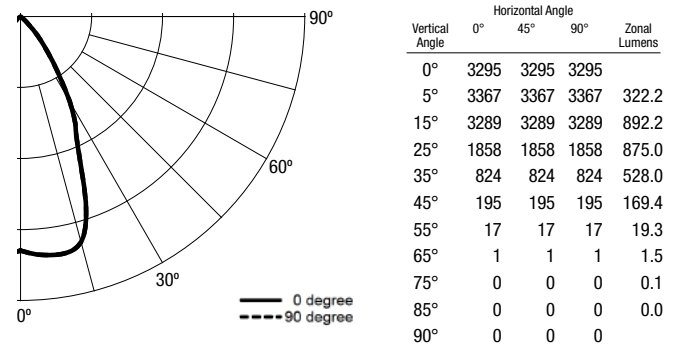

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106		
1	319	404	480	548	328	407	477	541	412	472	528	416	468	516		
2	272	329	377	416	278	331	375	413	334	372	406	336	370	399		
3	237	276	307	331	241	277	306	329	279	304	325	280	302	321		
4	210	237	256	271	212	237	256	270	238	255	268	238	253	266		
5	188	206	219	228	189	206	218	227	206	217	226	207	217	224		
6	170	182	190	195	170	182	189	195	181	189	194	181	188	193		
7	154	162	166	170	155	162	166	169	161	166	169	161	165	168		
8	141	145	148	149	141	145	147	149	145	147	149	144	147	148		
9	130	131	132	133	130	131	132	132	131	132	132	130	131	132		
10	120	119	119	119	120	119	119	119	119	119	118	119	118	118		


BASYS LED II

6" Round Downlight, 46W, 3500K, 80 CRI

Medium Beam, 55° cutoff

3496 lumens, 44.8W, 78 lm/W

Candela Distribution

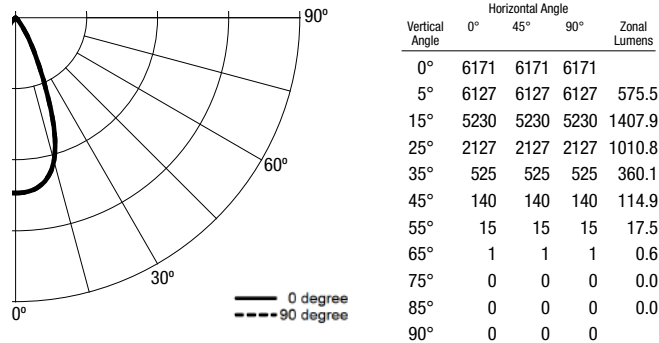

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	
0		119	119	119	119	116	116	116	116	111	111	111	106	106	106	
1		335	426	507	581	345	429	505	574	435	500	560	440	496	547	
2		288	351	403	447	295	353	402	443	356	399	436	359	396	429	
3		253	298	332	360	257	299	331	357	301	330	353	302	328	349	
4		226	258	281	299	229	258	280	297	259	279	295	260	278	292	
5		204	226	242	254	206	227	242	253	227	241	251	228	240	250	
6		186	201	212	220	187	201	212	219	202	211	218	202	211	217	
7		170	181	188	193	171	181	188	193	181	187	192	181	187	191	
8		157	164	168	171	157	164	168	171	164	168	171	163	167	170	
9		145	149	152	154	145	149	152	154	149	151	153	149	151	153	
10		135	137	138	139	135	137	138	139	137	138	139	136	138	138	


BASYS LED II

6" Round Downlight, 46W, 3500K, 80 CRI

Wide Beam, 55° cutoff

3433 lumens, 42.7W, 80.4 lm/W

Candela Distribution

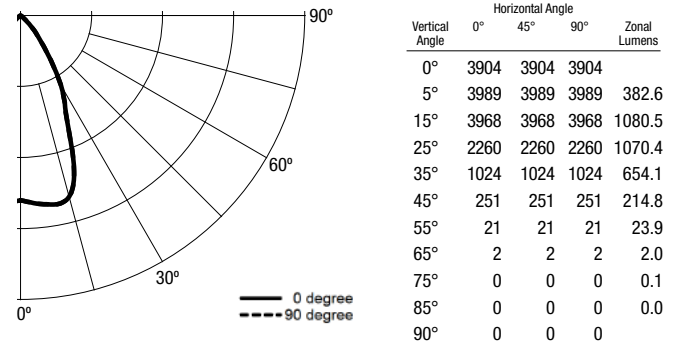

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
	RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	
0		119	119	119	119	116	116	116	116	111	111	111	106	106	106	
1		319	403	478	546	328	405	476	539	411	471	526	415	466	514	
2		272	328	375	415	277	330	374	411	333	371	404	335	368	398	
3		236	275	305	329	240	276	304	327	277	303	323	279	301	320	
4		209	236	255	270	211	236	254	269	237	253	266	237	252	264	
5		187	205	217	227	188	205	217	226	205	216	225	205	215	223	
6		169	181	188	194	169	181	188	194	180	187	193	180	187	192	
7		154	161	165	168	154	161	165	168	160	164	168	160	164	167	
8		140	144	146	148	140	144	146	148	144	146	147	143	145	147	
9		129	130	131	131	129	130	131	131	130	130	131	129	130	131	
10		119	119	118	118	119	118	118	118	118	118	117	118	117	117	

DESCRIPTION

Recessed 3.5" aperture lens wall wash luminaire utilizing a LED array. Housing is suitable for 2x8 residential or commercial constructions, airtight and can be used in direct contact with insulation. Housing platform + primary reflector + optical element combination supports various distributions and reflector types providing design flexibility. Use where excellent light control and low aperture brightness are demanded.

SPECIFICATION FEATURES

Frame

Galvanized steel plaster frame with integral bar hanger receivers. Setscrews provide positive horizontal locking. Integral gun sights facilitate the use of guide strings or laser lines. Shipped with overspray protector installed.

Housing

Steel housing painted matte black for visually dark interior. Removable access panels allow splice inspection and service of all electrical components including LED module and driver from below the ceiling thru the aperture. Removable hinged top allow top access. All fasteners are captive.

Bar Hangers

Captive preinstalled bar hangers adjust from 8-1/2" to 24" wide; pass thru feature allows shortening without removal. Captive nail penetrates standard and engineered lumber. Mounting flange levels platform with ceiling. Integral clip attached directly to tee-bar.

Universal Mounting Bracket

Accepts 1/2" EMT, C channel and bar hangers and adjusts 3" vertically from above the ceiling.

Gaskets

Closed cell gaskets achieve restrictive airflow requirements without additional caulking.

Adjustment Mechanism

Dynamic aiming rotates 365°, tilts 45° and locks in position. Angle markings assist in repeatable settings. Translating center beam optics aligns axis of primary reflector with aperture from nadir to 45°.

LED Module

Field replaceable module utilizes Cree® MT-G2 LED array and conforms to Zhaga standards for interchangeability. Proximity phosphors over chip on board LEDs provide a uniform source with high efficiency and no pixilation. Color accuracy within 2 SDCM and optional 90 CRI provides excellent color. Passive cooling achieves L70 at 40,000 hours.

Primary Optic

Borosilicate glass segmented optic with > 95% reflective multi-layer hard coating delivers a highly efficient and uniform beam. Various distributions are available and can be interchanged without tools. Elastomeric glare shield accepts theatrical color filters and diffusion films.

Media

Optional media holder accepts one or two 3.0mm thick color filters or beam modifying lens. Order media holder, color filters and lens separately.

Lower Reflector

Spun 0.04" thick aluminum angle cut parabolic contour provides cutoff to lens. Neutral color glass linear spread lens provides smooth vertical illumination with a minimal downlight component. Available in a wide range of specular and semi-specular Alzak® finishes. Light trap eliminates spill light at edge of flange and reflector. Metal trim ring can be removed for painting and can be installed flush mount with optional flush mount collar accessory.

Trim Retention

Retained with two torsion springs holding the flange tightly to the finished ceiling surface and

Catalog #	Type
Project	
Comments	Date
Prepared By	

accommodates ceiling thickness from 1/2 - 1" thick. Use optional plaster lip extender for ceilings up to 2" thick.

Junction Box

(6) 1/2" and (2) 3/4" trade size pry outs positioned to allow straight conduit runs.

Driver

Integral constant current driver provides noise free operation. Continuous, flicker-free 1% dimming, available with 2 or 3 wire phase cut and EcoSystem/DALI digital control interfaces. The DALI option is Fifth Light compatible.

Emergency Option

Provides 90 minutes of standby lighting meeting most life safety codes for egress lighting. Remote charge indicator and test switch. The maximum battery pack ambient is 50°C.

Compliance

Type IC inherently protected, suitable for direct contact with insulation and cULus listed for wet locations. Restrictive airflow per ASTM-E283. EMI/RFI emissions per FCC 47CFR Part 18 consumer limits. Contains no mercury or lead and RoHS compliant. Photometric testing in accordance with IES LM79-08. Lumen maintenance projections in accordance with IES LM-80-08 and TM-21-11. Zhaga compliant. Meets EMI/RFI emission per FCC 47CFR Part 18 consumer limits at 120V input. Lighting Facts Labeled.


Warranty

5 year warranty.



P3LED09
E3LWW



LED Lens Wall Wash
3.5" Aperture
900 Lumen Series



Catalog #	X-Dimension
P3LED09*E	16.4" (416mm)
P3LED09*E010	16.25" (413mm)
P3LED09*E5LT	16.25" (413mm)
P3LED09*EDMX	16.25" (413mm)
P3LED09*1ELTE	16.9" (429mm)
P3LED09*EL3D	16.9" (429mm)

E Driver Option		
Input Voltage	120V	277V
Input Current (A)	0.12	0.06
Input Power (W)	14.3	15
Inrush Current (A)	0.17	0.43
THD: ≤ 20%		
PF: ≥ 0.90		
T Ambient: -20 to +40°C		
T Plenum: +65°C Max.		
Sound Rating: Class A		

E010 Driver Option		
Input Voltage	120V	277V
Input Current (A)	0.13	0.06
Input Power (W)	14.3	15
Inrush Current (A)	0.6	1
THD: ≤ 20%		
PF: ≥ 0.90		
T Ambient: -20 to +40°C		
T Plenum: +65°C Max.		
Sound Rating: Class A		

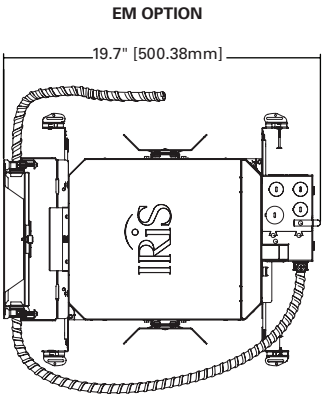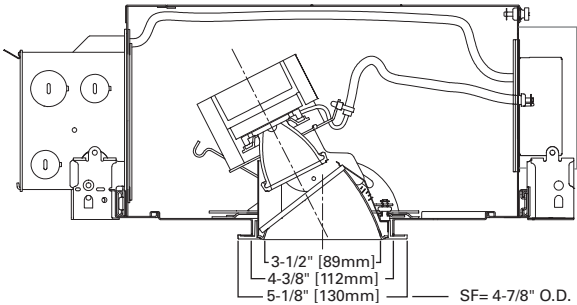

ORDERING INFORMATION

P3LED E3LWW

Complete luminaire consists of a housing platform and optical element. Housing platform can be ordered without primary optic. Order primary optics separately.

Example: P3LED09830E RG50NFL25 E3LWWH

Platform	Lumens ¹	Distribution	Color	Driver	Options
P3LED-09-FL40-840--EL3D-E3LWW-WH-RG50FL40					


P3LED = 3.5" Aperture IC, AT LED Housing Platform P3LED = 3.5" Aperture IC, AT LED Housing Platform, CCEA listed for City of Chicago Plenum Requirements	09 = 900 Lumens (Nominal)	[Blank] = Omit Primary Optic NFL25 = 25° Beam FL40 = 40° Beam	827 = 80 CRI Minimum, 2,700 K CCT 927 = 90 CRI Minimum, 2,700 K CCT 830 = 80 CRI Minimum, 3,000 K CCT 930 = 90 CRI Minimum, 3,000 K CCT 835 = 80 CRI Minimum, 3,500 K CCT 840 = 80 CRI Minimum, 4,000 K CCT	E = 120 – 277V 50/60Hz Leading or Trailing Edge Phase Cut 1% Dimming E010 = 120 – 277V 50/60Hz 0-10V 10% Dimming E5LT = 120 – 277V 50/60Hz DALI 1% Dimming 1ELTE = 120V 60Hz Leading Edge 1% Dimming, Lutron A-Series EL3D = 120 – 277V 50/60Hz 3-wire and EcoSystem 1% Dimming, Lutron A-Series	EM = Integral Battery Backup with Remote Test Switch and Indicator Light (Not available with 1ELTE and EL3D driver options)
---	----------------------------------	--	--	---	---

Optical Element	Finishes		Options	Accessories
E3LWW				
E3LWW = 3.5" Aperture Lens Wall Wash Reflector	Alzak® Finishes C = Specular Clear H = Semi-Specular Clear G = Gold WMH = Warm Haze WH = Wheat WHH = Wheat Haze GP = Graphite GPH = Graphite Haze K = Cognac KH = Cognac Haze CC = Chocolate CCH = Chocolate Haze B = Black	Painted Finishes MW = Matte white W = Gloss white	[Blank] = Metal Trim Ring, Matte White SF = Self-flanged SFWF = Self-flanged, Matte White Flange	RG50NFL25 = 25° Beam Glass Reflector, 50mm RG50FL40 = 40° Beam Glass Reflector, 50mm FMC3 = Flush Mount Collar Accessory PLE3 = Plaster Lip Extender for Up to 2" Thick Ceilings ZLM03 = Replacement LED module, see specification sheet for catalog number and performance data







ENERGY DATA

1ELTE Driver Option			EL3D Driver Option			E5LT Driver Option			EDMX Driver Option		
Input Voltage	120V	277V	Input Voltage	120V	277V	Input Voltage	120V	277V	Input Voltage	120V	277V
Input Current (A)	0.13		Input Current (A)	0.13	0.06	Input Current (A)	0.12	0.06	Input Current (A)	0.13	0.06
Input Power (W)	15.7		Input Power (W)	15.6	16	Input Power (W)	14.3	15.2	Input Power (W)	15.1	16.1
Inrush Current (A)	1.9		Inrush Current (A)	1.9	2	Inrush Current (A)	1.73	1.8	Inrush Current (A)	1.82	1.89
THD: ≤ 20%			THD	≤20%		THD: ≤ 20%			THD	≤20%	
PF: ≥ 0.90			PF	≥0.90	≥0.80	PF: ≥ 0.90			PF	≥0.90	≥0.60
T Ambient: -20 to +40°C			T Ambient: -20 to +40°C			T Ambient: -20 to +40°C			T Ambient: -20 to +40°C		
T Plenum: +65°C Max.			T Plenum: +65°C Max.			T Plenum: +65°C Max.			T Plenum: +65°C Max.		
Sound Rating: Class A			Sound Rating: Class A			Sound Rating: Class A			Sound Rating: Class A		

PHOTOMETRICS

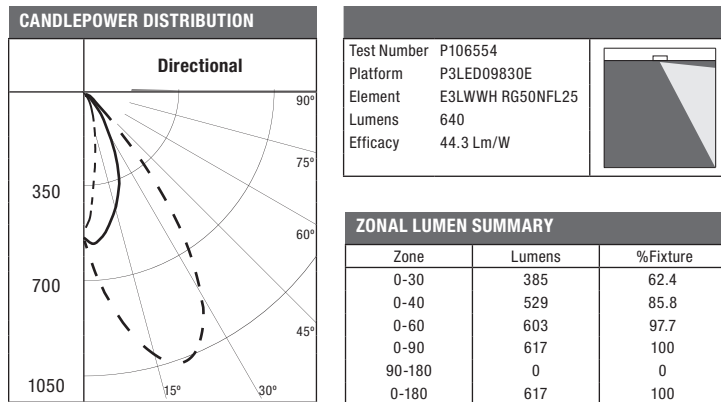

SINGLE UNIT FOOTCANDLES								MULTIPLE UNIT FOOTCANDLES											
3' FROM WALL (Distance From Fixture Along Wall)								2.5' FROM WALL (Spacing Between Fixtures)						3' FROM WALL (Spacing Between Fixtures)					
DD	●	1'	2'	3'	4'	5'	6'	●	2' apart	●	●	3' apart	●	●	2' apart	●	●	3' apart	●
1'	1.6	1.1	0.5	0.2	0.1	0	0	3.3	3.5	3.3	2.8	2.2	2.8	2.1	2.2	2.1	1.8	1.5	1.8
2'	2.5	2	1.1	0.4	0.2	0.1	0	5.9	6.1	5.9	5.1	4.1	5.1	3.6	3.9	3.6	2.9	2.9	2.9
3'	5.7	4	1.7	0.7	0.3	0.2	0.1	17.3	17.6	17.3	15.3	10.2	15.3	7.4	8	7.4	6.4	5.4	6.4
4'	12	8.9	3.9	1.4	0.5	0.2	0.1	23.3	26.3	23.3	19.4	18.3	19.4	15.9	17.8	15.9	13.4	12.3	13.4
5'	11.9	9.8	5.6	2.4	0.9	0.3	0.2	19.9	22.1	19.9	16.3	17.4	16.3	17.5	19.7	17.5	14.3	15.6	14.3
6'	9.4	8.2	5.5	3	1.3	0.5	0.2	14.8	16.3	14.8	12.4	13.6	12.4	14.9	16.3	14.9	12.4	13.7	12.4
7'	7	6.3	4.6	2.9	1.6	0.7	0.3	10.6	11.5	10.6	9.1	10	9.1	11.6	12.5	11.6	9.9	10.9	9.9
8'	5.1	4.7	3.6	2.5	1.5	0.9	0.4	7.6	8.1	7.6	6.6	7.3	6.6	8.7	9.3	8.7	7.6	8.4	7.6
9'	3.7	3.5	2.8	2.1	1.4	0.9	0.5	5.5	5.8	5.5	4.9	5.4	4.7	6.5	6.9	6.5	5.8	6.3	5.8
10'	2.7	2.6	2.2	1.7	1.2	0.8	0.5	4.1	4.2	4.1	3.7	4	3.8	4.9	5.2	4.9	4.4	4.8	4.4

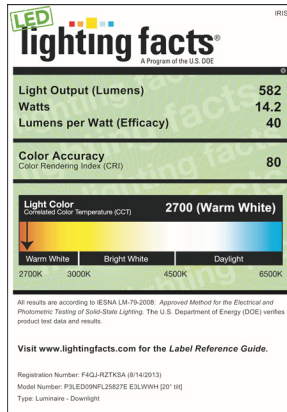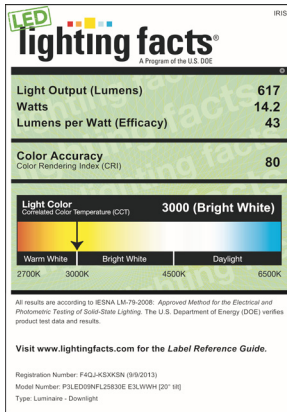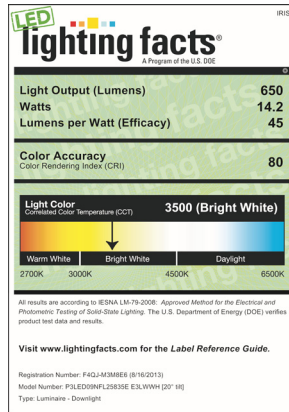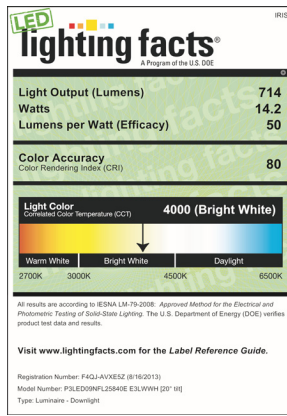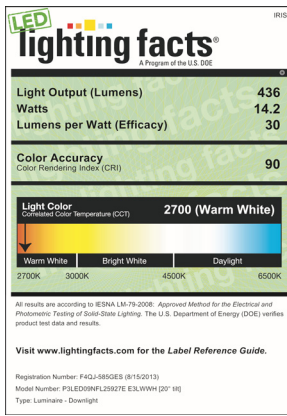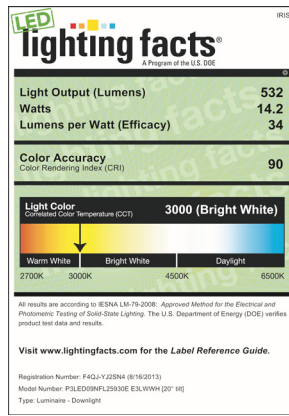

Please see LightingFacts.com for a complete listing of products.

DESCRIPTION

Recessed 3.5" aperture directional luminaire with angle cut shielding reflector utilizing a LED array. Housing is suitable for 2x8 residential or commercial constructions, airtight and can be used in direct contact with insulation. Housing platform + primary reflector + optical element combination supports various distributions and reflector types providing design flexibility. Use where excellent light control and low aperture brightness are demanded.

SPECIFICATION FEATURES**Frame**

Galvanized steel plaster frame with integral bar hanger receivers. Setscrews provide positive horizontal locking. Integral gun sights facilitate the use of guide strings or laser lines. Shipped with overspray protector installed.

Housing

Steel housing painted matte black for visually dark interior. Removable access panels allow splice inspection and service of all electrical components including LED module and driver from below the ceiling thru the aperture. Removable hinged top allow top access. All fasteners are captive.

Bar Hangers

Captive preinstalled bar hangers adjust from 8-1/2" to 24" wide; pass thru feature allows shortening without removal. Captive nail penetrates standard and engineered lumber. Mounting flange levels platform with ceiling. Integral clip attached directly to tee-bar.

Universal Mounting Bracket

Accepts 1/2" EMT, C channel and bar hangers and adjusts 3" vertically from above the ceiling.

Gaskets

Closed cell gaskets achieve restrictive airflow requirements without additional caulking.

Adjustment Mechanism

Dynamic aiming rotates 365°, tilts 45° and locks in position. Angle markings assist in repeatable settings. Translating center beam optics aligns axis of primary reflector with aperture from nadir to 45°.

LED Module

Field replaceable module utilizes Cree® MT-G2 LED array and conforms to Zhaga standards for interchangeability. Proximity phosphors over chip on board LEDs provide a uniform source with high efficiency and no pixilation. Color accuracy within 2 SDCM and optional 90 CRI provides excellent color. Passive cooling achieves L70 at 40,000 hours.

Primary Optic

Borosilicate glass segmented optic with > 95% reflective multi-layer hard coating delivers a highly efficient and uniform beam. Various distributions are available and can be interchanged without tools. Elastomeric glare shield accepts theatrical color filters and diffusion films.

Media

Optional media holder accepts one or two 3.0mm thick color filters or beam modifying lens. Order media holder, color filters and lens separately.

Lower Reflector

Spun 0.04" thick aluminum angle cut parabolic contour provides 50° room side cutoff and is available in a wide range of specular and semi-specular Alzak® finishes. Light trap eliminates spill light at edge of flange and reflector. Metal trim ring can be removed for painting and can be installed flush mount with optional flush mount collar accessory.

Trim Retention

Retained with two torsion springs holding the flange tightly to the finished ceiling surface and accommodates ceiling thickness from 1/2" - 1" thick. Use optional plaster lip extender for ceilings up to 2" thick.

Catalog #	Type
Project	
Comments	Date
Prepared By	

Junction Box

(6) 1/2" and (2) 3/4" trade size pry outs positioned to allow straight conduit runs.

Driver

Integral constant current driver provides noise free operation. Continuous, flicker-free 1% dimming, available with 2 or 3 wire phase cut and EcoSystem/DALI digital control interfaces. The DALI option is Fifth Light compatible.

Emergency Option

Provides 90 minutes of standby lighting meeting most life safety codes for egress lighting. Remote charge indicator and test switch. The maximum battery pack ambient is 50°C.

Compliance

Type IC inherently protected, suitable for direct contact with insulation and cULus listed for damp locations. Restrictive airflow per ASTM-E283. EMI/RFI emissions per FCC 47CFR Part 18 consumer limits. Contains no mercury or lead and RoHS compliant. Photometric testing in accordance with IES LM-79-08. Lumen maintenance projections in accordance with IES LM-80-08 and TM-21-11. Meets California Title 24 residential fixture program and listed on appliance database. Energy Star listed. Zhaga compliant. Meets EMI/RFI emission per FCC 47CFR Part 18 consumer limits at 120V input. Lighting Facts Labeled.


Warranty

5 year warranty.



P3LED09 E3AA, E3AA20

**LED Directional Angle Cut and
Shallow Angle Cut
3.5" Aperture
900 Lumen Series**





Catalog #	X-Dimension
P3LED09*E	16.4" (416mm)
P3LED09*E010	16.25" (413mm)
P3LED09*E5LT	16.25" (413mm)
P3LED09*EDMX	16.25" (413mm)
P3LED09*1ELTE	16.9" (429mm)
P3LED09*EL3D	16.9" (429mm)

E Driver Option

Input Voltage	120V	277V
Input Current (A)	0.12	0.06
Input Power (W)	14.3	15
Inrush Current (A)	0.17	0.43
THD: ≤ 20%		
PF: ≥ 0.90		
T Ambient: -20 to +40°C		
T Plenum: +65°C Max.		
Sound Rating: Class A		

E010 Driver Option

Input Voltage	120V	277V
Input Current (A)	0.13	0.06
Input Power (W)	14.3	15
Inrush Current (A)	0.6	1
THD: ≤ 20%		
PF: ≥ 0.90		
T Ambient: -20 to +40°C		
T Plenum: +65°C Max.		
Sound Rating: Class A		

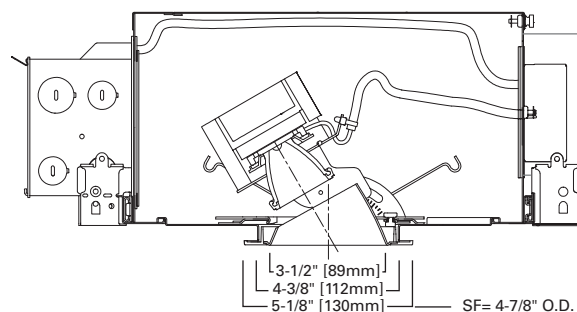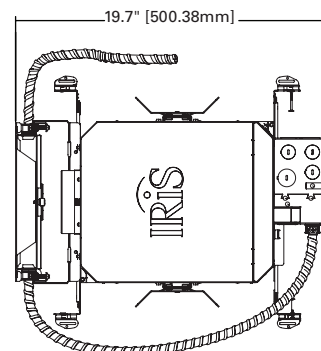**EM OPTION**

ORDERING INFORMATION

Complete luminaire consists of a housing platform and optical element. Housing platform can be ordered without primary optic. Order primary optics separately.

Example: PLED09830E RG50SP15 E3AAH

Platform	Lumens ¹	Distribution	Color	Driver	Options
P3LED-09-FL40-903-EL3D-E3AA-WH-RG50FL40					
P3LED = 3.5" Aperture IC, AT LED Housing Platform P3LEDCP = 3.5" Aperture IC, AT LED Housing Platform, CCEA listed for City of Chicago Plenum Requirements	09 = 900 Lumens (Nominal)	[Blank] = Omit Primary Optic NSP10 = 10° Beam SP15 = 15° Beam NFL25 = 25° Beam FL40 = 40° Beam	827 = 80 CRI Minimum, 2,700 K CCT 927 = 90 CRI Minimum, 2,700 K CCT 830 = 80 CRI Minimum, 3,000 K CCT 930 = 90 CRI Minimum, 3,000 K CCT 835 = 80 CRI Minimum, 3,500 K CCT 840 = 80 CRI Minimum, 4,000 K CCT	E = 120 – 277V 50/60Hz Leading or Trailing Edge Phase Cut 1% Dimming E010 = 120 – 277V 50/60Hz 0 -10V 10% Dimming 1ELTE = 120V 60Hz Leading Edge 1% Dimming, Lutron A-Series EDMX = 120 – 277V 50/60Hz DMX 1% Dimming E5LT = 120 – 277V 50/60Hz DALI 1% Dimming EL3D = 120 – 277V 50/60Hz 3-wire and EcoSystem 1% Dimming, Lutron A-Series	EM = Integral Battery Backup with Remote Test Switch and Indicator Light (Not available with 1ELTE and EL3D driver options)

Optical Element	Finishes	Options	Accessories
E3AA			
E3AA = 3.5" Aperture Open Angle Cut Reflector E3AA20 = 3.5" Aperture Shallow Open Angle Cut Reflector	Alzak® Finishes C = Specular Clear H = Semi-Specular Clear G = Gold WMH = Warm Haze WH = Wheat WHH = Wheat Haze GP = Graphite GPH = Graphite Haze K = Cognac KH = Cognac Haze	CC = Chocolate CCH = Chocolate Haze B = Black Painted Finishes MW = Matte White W = Gloss White BB = Black Baffle WB = White Baffle	RG50NSP10 = 10° Beam Glass Reflector, 50mm RG50SP15 = 15° Beam Glass Reflector, 50mm RG50NFL25 = 25° Beam Glass Reflector, 50mm RG50FL40 = 40° Beam Glass Reflector, 50mm RG50MH = Media Holder for 50mm Reflector FMC3 = Flush Mount Collar Accessory PLE3 = Plaster Lip Extender for Up to 2" Thick Ceilings ZLM03 = Replacement LED module, see specification sheet for catalog number and performance data





ENERGY DATA

P3LED E3AA/E3AA20

1ELTE Driver Option			EL3D Driver Option			E5LT Driver Option			EDMX Driver Option		
Input Voltage	120V	277V	Input Voltage	120V	277V	Input Voltage	120V	277V	Input Voltage	120V	277V
Input Current (A)	0.13		Input Current (A)	0.13	0.06	Input Current (A)	0.12	0.06	Input Current (A)	0.13	0.06
Input Power (W)	15.7		Input Power (W)	15.6	16	Input Power (W)	14.3	15.2	Input Power (W)	15.1	16.1
Inrush Current (A)	1.9		Inrush Current (A)	1.9	2	Inrush Current (A)	1.73	1.8	Inrush Current (A)	1.82	1.89
THD: ≤ 20%			THD	≤20%		THD: ≤ 20%			THD	≤20%	
PF: ≥ 0.90			PF	≥0.90	≥0.80	PF: ≥ 0.90			PF	≥0.90	≥0.0
T Ambient: -20 to +40°C			T Ambient: -20 to +40°C			T Ambient: -20 to +40°C			T Ambient: -20 to +40°C		
T Plenum: +65°C Max.			T Plenum: +65°C Max.			T Plenum: +65°C Max.			T Plenum: +65°C Max.		
Sound Rating: Class A			Sound Rating: Class A			Sound Rating: Class A			Sound Rating: Class A		


PHOTOMETRICS

P3LED E3AA/E3AA20

CANDLEPOWER DISTRIBUTION		30° HORIZONTAL PLANE		30° VERTICAL PLANE																																																																																																																						
<div><div>Directional</div></div>		<div><div>Test Number</div><div>Platform</div><div>Element</div><div>Lumens</div><div>Efficacy</div></div> <div><div>P106710</div><div>P3LED09830E</div><div>E3AAC RG50FL40</div><div>994 Lm</div><div>69.5 Lm/W</div></div>		<table><thead><tr><th></th><th>MH</th><th>FC</th><th>L</th><th>W</th><th>CB</th></tr></thead><tbody><tr><td>5.5'</td><td>21.5</td><td>5.8</td><td>4</td><td>3.2</td><td></td></tr><tr><td>7'</td><td>13.3</td><td>7.4</td><td>5</td><td>4</td><td></td></tr><tr><td>8'</td><td>10.2</td><td>8.5</td><td>5.8</td><td>4.6</td><td></td></tr><tr><td>9'</td><td>8</td><td>9.5</td><td>6.6</td><td>5.2</td><td></td></tr><tr><td>10'</td><td>6.5</td><td>10.6</td><td>7.2</td><td>5.8</td><td></td></tr><tr><td>12'</td><td>4.5</td><td>12.8</td><td>8.8</td><td>6.9</td><td></td></tr></tbody></table> 		MH	FC	L	W	CB	5.5'	21.5	5.8	4	3.2		7'	13.3	7.4	5	4		8'	10.2	8.5	5.8	4.6		9'	8	9.5	6.6	5.2		10'	6.5	10.6	7.2	5.8		12'	4.5	12.8	8.8	6.9		<table><thead><tr><th></th><th>D</th><th>FC</th><th>L</th><th>W</th><th>CB</th></tr></thead><tbody><tr><td>5.5'</td><td>53.1</td><td>3.4</td><td>3.4</td><td>9.5</td><td></td></tr><tr><td>7'</td><td>32.8</td><td>4.3</td><td>4.4</td><td>12.1</td><td></td></tr><tr><td>8'</td><td>25.1</td><td>4.9</td><td>5.2</td><td>13.9</td><td></td></tr><tr><td>9'</td><td>19.8</td><td>5.6</td><td>5.8</td><td>15.6</td><td></td></tr><tr><td>10'</td><td>16.1</td><td>6.2</td><td>6.4</td><td>17.3</td><td></td></tr><tr><td>12'</td><td>11.2</td><td>7.4</td><td>7.8</td><td>20.8</td><td></td></tr></tbody></table> 		D	FC	L	W	CB	5.5'	53.1	3.4	3.4	9.5		7'	32.8	4.3	4.4	12.1		8'	25.1	4.9	5.2	13.9		9'	19.8	5.6	5.8	15.6		10'	16.1	6.2	6.4	17.3		12'	11.2	7.4	7.8	20.8																																		
	MH	FC	L	W	CB																																																																																																																					
5.5'	21.5	5.8	4	3.2																																																																																																																						
7'	13.3	7.4	5	4																																																																																																																						
8'	10.2	8.5	5.8	4.6																																																																																																																						
9'	8	9.5	6.6	5.2																																																																																																																						
10'	6.5	10.6	7.2	5.8																																																																																																																						
12'	4.5	12.8	8.8	6.9																																																																																																																						
	D	FC	L	W	CB																																																																																																																					
5.5'	53.1	3.4	3.4	9.5																																																																																																																						
7'	32.8	4.3	4.4	12.1																																																																																																																						
8'	25.1	4.9	5.2	13.9																																																																																																																						
9'	19.8	5.6	5.8	15.6																																																																																																																						
10'	16.1	6.2	6.4	17.3																																																																																																																						
12'	11.2	7.4	7.8	20.8																																																																																																																						
<div>LEGEND: 0-deg: - - - - 90-deg: = = = = 180-deg: _ _ _ _</div>		<div>ZONAL LUMEN SUMMARY</div> <table><thead><tr><th>Zone</th><th>Lumens</th><th>%Fixture</th></tr></thead><tbody><tr><td>0-30</td><td>475</td><td>51.4</td></tr><tr><td>0-40</td><td>744</td><td>80.5</td></tr><tr><td>0-60</td><td>922</td><td>99.7</td></tr><tr><td>0-90</td><td>924</td><td>100</td></tr><tr><td>90-180</td><td>0</td><td>0</td></tr><tr><td>0-180</td><td>924</td><td>100</td></tr></tbody></table>		Zone	Lumens	%Fixture	0-30	475	51.4	0-40	744	80.5	0-60	922	99.7	0-90	924	100	90-180	0	0	0-180	924	100	<div>SINGLE UNIT FOOTCANDLES</div> <table><thead><tr><th></th><th colspan="7">3' FROM WALL (Distance From Fixture Along Wall)</th></tr><tr><th>DD</th><th>●</th><th>1'</th><th>2'</th><th>3'</th><th>4'</th><th>5'</th><th>6'</th></tr></thead><tbody><tr><td>1'</td><td>0</td><td>0</td><td>0</td><td>0.1</td><td>0</td><td>0</td><td>0</td></tr><tr><td>2'</td><td>12.2</td><td>6.6</td><td>0</td><td>0</td><td>0</td><td>0</td><td>0</td></tr><tr><td>3'</td><td>47.7</td><td>20.7</td><td>6.3</td><td>0.1</td><td>0</td><td>0</td><td>0</td></tr><tr><td>4'</td><td>49.2</td><td>35.8</td><td>9.9</td><td>2.8</td><td>0.3</td><td>0</td><td>0</td></tr><tr><td>5'</td><td>33.8</td><td>27.8</td><td>13.5</td><td>3.4</td><td>1.2</td><td>0.2</td><td>0</td></tr><tr><td>6'</td><td>22.8</td><td>19.2</td><td>11.1</td><td>4.7</td><td>1.4</td><td>0.5</td><td>0.1</td></tr><tr><td>7'</td><td>14.7</td><td>13.4</td><td>8.3</td><td>4.5</td><td>2</td><td>0.6</td><td>0.2</td></tr><tr><td>8'</td><td>9.2</td><td>9.8</td><td>6.1</td><td>3.8</td><td>2</td><td>0.8</td><td>0.2</td></tr><tr><td>9'</td><td>6.3</td><td>6.8</td><td>4.4</td><td>3</td><td>1.8</td><td>0.9</td><td>0.3</td></tr><tr><td>10'</td><td>4.4</td><td>4.5</td><td>3.4</td><td>2.3</td><td>1.5</td><td>0.9</td><td>0.4</td></tr></tbody></table>			3' FROM WALL (Distance From Fixture Along Wall)							DD	●	1'	2'	3'	4'	5'	6'	1'	0	0	0	0.1	0	0	0	2'	12.2	6.6	0	0	0	0	0	3'	47.7	20.7	6.3	0.1	0	0	0	4'	49.2	35.8	9.9	2.8	0.3	0	0	5'	33.8	27.8	13.5	3.4	1.2	0.2	0	6'	22.8	19.2	11.1	4.7	1.4	0.5	0.1	7'	14.7	13.4	8.3	4.5	2	0.6	0.2	8'	9.2	9.8	6.1	3.8	2	0.8	0.2	9'	6.3	6.8	4.4	3	1.8	0.9	0.3	10'	4.4	4.5	3.4	2.3	1.5	0.9	0.4
Zone	Lumens	%Fixture																																																																																																																								
0-30	475	51.4																																																																																																																								
0-40	744	80.5																																																																																																																								
0-60	922	99.7																																																																																																																								
0-90	924	100																																																																																																																								
90-180	0	0																																																																																																																								
0-180	924	100																																																																																																																								
	3' FROM WALL (Distance From Fixture Along Wall)																																																																																																																									
DD	●	1'	2'	3'	4'	5'	6'																																																																																																																			
1'	0	0	0	0.1	0	0	0																																																																																																																			
2'	12.2	6.6	0	0	0	0	0																																																																																																																			
3'	47.7	20.7	6.3	0.1	0	0	0																																																																																																																			
4'	49.2	35.8	9.9	2.8	0.3	0	0																																																																																																																			
5'	33.8	27.8	13.5	3.4	1.2	0.2	0																																																																																																																			
6'	22.8	19.2	11.1	4.7	1.4	0.5	0.1																																																																																																																			
7'	14.7	13.4	8.3	4.5	2	0.6	0.2																																																																																																																			
8'	9.2	9.8	6.1	3.8	2	0.8	0.2																																																																																																																			
9'	6.3	6.8	4.4	3	1.8	0.9	0.3																																																																																																																			
10'	4.4	4.5	3.4	2.3	1.5	0.9	0.4																																																																																																																			

PHOTOMETRICS

P3LED E3AA/E3AA20

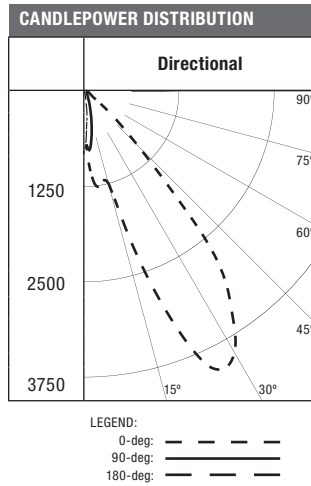

Test Number	P106626
Platform	P3LED09830E
Element	E3AAC RG50NF25
Lumens	1016 Lm
Efficacy	71.6 Lm/W

ZONAL LUMEN SUMMARY


Zone	Lumens	%Fixture
0-30	559	59.2
0-40	866	91.6
0-60	944	99.9
0-90	945	100
90-180	0	0
0-180	945	100

30° HORIZONTAL PLANE						30° VERTICAL PLANE					
	MH	FC	L	W	CB		D	FC	L	W	CB
5.5'	27.7	7	4	3.2		5.5'	83.7	2.8	2.6	9.5	
7'	17.1	8.9	5	4		7'	51.7	3.6	3.4	12.1	
8'	13.1	10.2	5.8	4.6		8'	39.6	4.1	4	13.9	
9'	10.3	11.4	6.4	5.2		9'	31.3	4.6	4.4	15.6	
10'	8.4	12.7	7.2	5.8		10'	25.3	5.1	5	17.3	
12'	5.8	15.3	8.6	6.9		12'	17.6	6.1	6	20.8	

SINGLE UNIT FOOTCANDLES

3' FROM WALL
(Distance From Fixture Along Wall)

DD	●	1'	2'	3'	4'	5'	6'
1'	0.1	0	0	0	0	0	0
2'	0.3	0.3	0.1	0	0	0	0
3'	27.8	8.5	0.1	0.1	0	0	0
4'	71.3	32.4	7	0.1	0	0	0
5'	57.3	38.3	12.9	1.4	0	0	0
6'	40.2	29.7	13	3.8	0.6	0	0
7'	25.9	20.4	10.3	3.6	1.5	0.2	0
8'	15.5	13.6	7.5	3	1.5	0.5	0.1
9'	9.2	8.8	5.5	2.4	1.3	0.6	0.2
10'	5.5	5.4	4.2	1.9	1.2	0.5	0.2

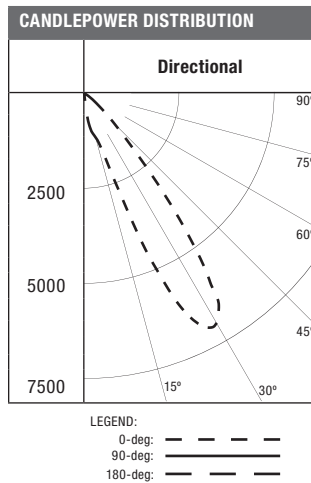

Test Number	P106806
Platform	P3LED09830E
Element	E3AAC RG50SP15
Lumens	1129 Lm
Efficacy	78.4 Lm/W

ZONAL LUMEN SUMMARY


Zone	Lumens	%Fixture
0-30	554	52.8
0-40	938	89.4
0-60	1037	98.8
0-90	1050	100
90-180	0	0
0-180	1050	100

30° HORIZONTAL PLANE						30° VERTICAL PLANE					
	MH	FC	L	W	CB		D	FC	L	W	CB
5.5'	40.2	4.8	2.8	3.2		5.5'	154.2	2.2	1.8	9.5	
7'	24.8	6.1	3.6	4		7'	95.2	2.7	2.4	12.1	
8'	19	7	4.2	4.6		8'	72.9	3.1	2.8	13.9	
9'	15	7.8	4.8	5.2		9'	57.6	3.6	3	15.6	
10'	12.2	8.8	5.2	5.8		10'	46.6	4	3.4	17.3	
12'	8.4	10.5	6.4	6.9		12'	32.4	4.8	4.2	20.8	

SINGLE UNIT FOOTCANDLES

3' FROM WALL
(Distance From Fixture Along Wall)

DD	●	1'	2'	3'	4'	5'	6'
1'	1.2	0.1	0.1	0	0	0	0
2'	3.2	0.1	0.2	0.2	0.1	0	0
3'	33.3	8.8	1.1	0.1	0.1	0.1	0.1
4'	109	34.2	7.8	0.1	0	0	0.1
5'	105.1	43.3	2.2	0.9	0.1	0	0
6'	68.2	35.4	12.1	3.1	0.4	0.1	0
7'	37.8	22.1	9.9	2.9	1.2	0.1	0
8'	8.4	13	6.9	2.6	1.2	0.4	0
9'	8.9	7.9	4.8	2.1	1.1	0.5	0.1
10'	4.8	4.8	3.5	1.6	0.9	0.5	0.2

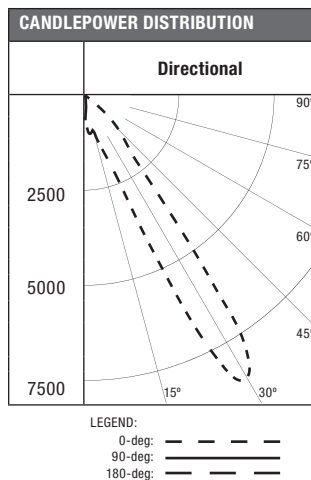

Test Number	P106854
Platform	P3LED09830E
Element	E3AAC RG50NSP10
Lumens	1066 Lm
Efficacy	74.6 Lm/W

ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixture
0-30	518	52.2
0-40	869	87.6
0-60	982	99.1
0-90	991	100
90-180	0	0
0-180	991	100

30° HORIZONTAL PLANE						30° VERTICAL PLANE					
	MH	FC	L	W	CB		D	FC	L	W	CB
5.5'	41.6	4	2.2	3.2		5.5'	185.7	1.5	1.4	9.5	
7'	25.7	5	2.8	4		7'	114.7	1.8	1.8	12.1	
8'	19.7	5.8	3.2	4.6		8'	87.8	2.1	2	13.9	
9'	15.5	6.5	3.6	5.2		9'	69.4	2.5	2.2	15.6	
10'	12.6	7.2	4	5.8		10'	56.2	2.8	2.4	17.3	
12'	8.7	8.6	4.8	6.9		12'	39	3.3	3	20.8	


SINGLE UNIT FOOTCANDLES

3' FROM WALL
(Distance From Fixture Along Wall)

DD	●	1'	2'	3'	4'	5'	6'
1'	0.6	0.1	0.1	0.3	0.1	0.1	0
2'	0.4	0.2	0.1	0	0.1	0	0.1
3'	42.8	15.7	0.1	0	0.1	0	0
4'	84.3	30.2	9.6	0.1	0	0	0
5'	127.1	29.7	12	2.2	0	0	0
6'	73.8	22.3	10.3	4	0.9	0.1	0
7'	24.5	13.7	7.6	3.7	1.6	0.3	0.1
8'	9.6	9.3	5.5	2.9	1.6	0.6	0.1
9'	5.6	6.2	4.3	2.3	1.4	0.6	0.2
10'	3.6	4	3.4	1.8	1.2	0.6	0.2

PHOTOMETRICS

P3LED E3AA/E3AA20

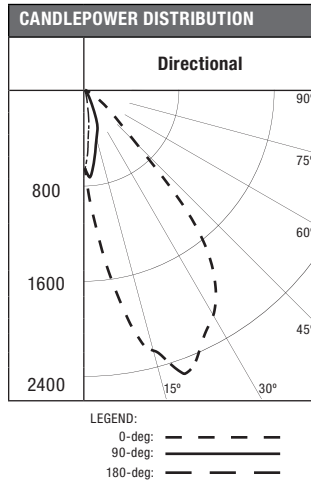

Test Number	P106002
Platform	P3LED09830E
Element	E3AA20C RG50FL40
Lumens	977 Lm
Efficacy	68.3 Lm/W

ZONAL LUMEN SUMMARY


Zone	Lumens	%Fixture
0-30	565	62.1
0-40	806	88.8
0-60	907	99.9
0-90	908	100
90-180	0	0
0-180	908	100

30° HORIZONTAL PLANE						30° VERTICAL PLANE					
	MH	FC	L	W	CB		D	FC	L	W	CB
5.5'	28.7	4.8	3.6	3.2		5.5'	47.7	4	3.6	9.5	
7'	17.7	6.1	4.6	4		7'	29.5	5.1	4.6	12.1	
8'	13.6	7	5.2	4.6		8'	22.6	5.8	5.2	13.9	
9'	10.7	7.9	6	5.2		9'	17.8	6.6	6	15.6	
10'	8.7	8.7	6.6	5.8		10'	14.4	7.3	6.6	17.3	
12'	6	10.5	8	6.9		12'	10	8.8	8	20.8	

SINGLE UNIT FOOTCANDLES

3' FROM WALL
(Distance From Fixture Along Wall)

DD	●	1'	2'	3'	4'	5'	6'
1'	0	0	0	0	0	0	0
2'	5.7	0.6	0	0	0	0	0
3'	18.9	11.5	3.8	0	0	0	0
4'	41.3	27.2	6.6	1.9	0.1	0	0
5'	32.3	25.7	11.9	3	0.9	0.1	0
6'	22.8	19.3	11.2	4.3	1.3	0.4	0.1
7'	16.6	13.7	9	4.6	1.9	0.6	0.1
8'	12.2	9.9	7	4.1	2.1	0.8	0.3
9'	8.7	7.4	5.3	3.5	2	1	0.4
10'	6.2	5.7	4	2.8	1.7	1	0.5

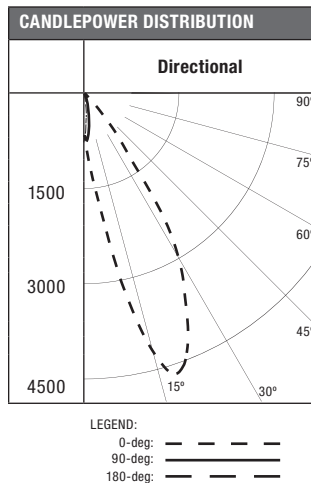

Test Number	P105990
Platform	P3LED09830E
Element	E3AA20C RG50NFL25
Lumens	955 Lm
Efficacy	66.8 Lm/W

ZONAL LUMEN SUMMARY


Zone	Lumens	%Fixture
0-30	656	73.8
0-40	863	97.1
0-60	888	99.9
0-90	889	100
90-180	0	0
0-180	889	100

30° HORIZONTAL PLANE						30° VERTICAL PLANE					
	MH	FC	L	W	CB		D	FC	L	W	CB
5.5'	46.3	4.1	2.8	3.2		5.5'	74.9	3.3	2.6	9.5	
7'	28.6	5.2	3.6	4		7'	46.2	4.3	3.4	12.1	
8'	21.9	6	4	4.6		8'	35.4	4.9	4	13.9	
9'	17.3	6.8	4.6	5.2		9'	28	5.5	4.4	15.6	
10'	14	7.5	5	5.8		10'	22.7	6.2	5	17.3	
12'	9.7	8.9	6.2	6.9		12'	15.7	7.4	6	20.8	

SINGLE UNIT FOOTCANDLES

3' FROM WALL
(Distance From Fixture Along Wall)

DD	●	1'	2'	3'	4'	5'	6'
1'	0.1	0	0	0	0	0	0
2'	0.3	0.2	0	0	0	0	0
3'	6.5	0.5	0.1	0	0	0	0
4'	35.5	18.2	1.1	0.1	0	0	0
5'	47.6	28.9	8.3	0.1	0	0	0
6'	38.4	28.2	8.7	2.7	0.1	0	0
7'	29.7	22.1	8.5	3.6	1	0.1	0
8'	22.1	16.4	7.6	3.2	1.4	0.4	0
9'	16	12	6.2	2.7	1.4	0.5	0.1
10'	11.3	8.8	4.8	2.3	1.3	0.6	0.2

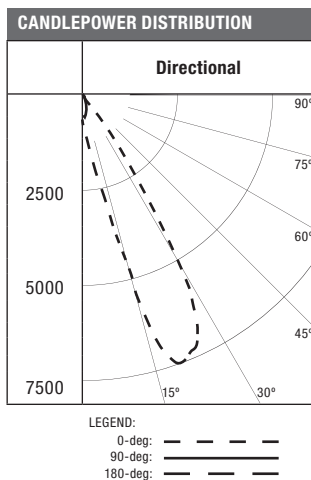

Test Number	P105978
Platform	P3LED09830E
Element	E3AA20C RG50SP15
Lumens	1081 Lm
Efficacy	75.6 Lm/W

ZONAL LUMEN SUMMARY


Zone	Lumens	%Fixture
0-30	765	76.1
0-40	969	96.4
0-60	997	99.2
0-90	1006	100
90-180	0	0
0-180	1006	100

30° HORIZONTAL PLANE						30° VERTICAL PLANE					
	MH	FC	L	W	CB		D	FC	L	W	CB
5.5'	68.6	3.7	2.2	3.2		5.5'	130.2	2.5	2	9.5	
7'	42.4	4.7	3	4		7'	80.4	3.3	2.6	12.1	
8'	32.4	5.4	3.4	4.6		8'	61.5	3.8	2.8	13.9	
9'	25.6	6	3.8	5.2		9'	48.6	4.3	3.2	15.6	
10'	20.8	6.7	4.2	5.8		10'	39.4	4.7	3.6	17.3	
12'	14.4	8.1	5.2	6.9		12'	27.3	5.7	4.4	20.8	


SINGLE UNIT FOOTCANDLES

3' FROM WALL
(Distance From Fixture Along Wall)

DD	●	1'	2'	3'	4'	5'	6'
1'	0.4	0.3	0	0	0.1	0.1	0
2'	0	0	0	0	0.1	0	0
3'	5.7	2.8	0	0	0	0	0
4'	33	17.5	1.8	0.1	0	0	0
5'	66.9	27	7.6	0.8	0.1	0	0
6'	67.1	34.1	8.6	2	0.3	0.1	0
7'	49.8	31.1	8.2	3.2	0.8	0.1	0
8'	36.1	23.3	7.2	2.9	1.3	0.3	0
9'	25	16	5.9	2.7	1.3	0.5	0.1
10'	16.1	10.8	4.6	2.3	1.2	0.5	0.1

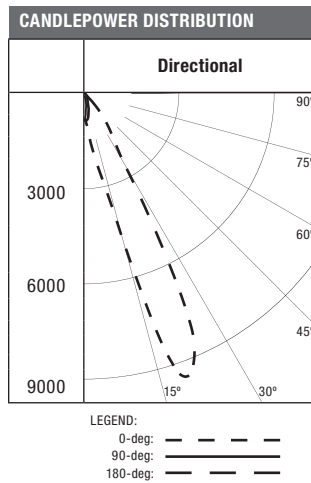

Test Number P105966
 Platform P3LED09830E
 Element E3AA20C RG50NSP10
 Lumens 1055 Lm
 Efficacy 73.3 Lm/W



ZONAL LUMEN SUMMARY

Zone	Lumens	%Fixture
0-30	780	79.5
0-40	941	95.9
0-60	968	98.7
0-90	981	100
90-180	0	0
0-180	981	100

20° HORIZONTAL PLANE						20° VERTICAL PLANE					
	MH	FC	L	W	CB		D	FC	L	W	CB
5.5'	5.5'	87.3	2.7	1.8	3.2	5.5'	5.5'	149.2	1.9	1.4	9.5
7'	7'	53.9	3.5	2.2	4	7'	7'	92.1	2.4	2	12.1
8'	8'	41.3	4	2.6	4.6	8'	8'	70.5	2.7	2.2	13.9
9'	9'	32.6	4.5	2.8	5.2	9'	9'	55.7	3.1	2.4	15.6
10'	10'	26.4	5.1	3.2	5.8	10'	10'	45.1	3.5	2.8	17.3
12'	12'	18.3	6.1	3.8	6.9	12'	12'	31.4	4.1	3.4	20.8

SINGLE UNIT FOOTCANDLES

3' FROM WALL
 (Distance From Fixture Along Wall)

DD	1'	2'	3'	4'	5'	6'
1'	0	0	0.4	0.1	0	0
2'	1.3	0.2	0.1	0.2	0.1	0
3'	1.8	0.3	0.3	0.1	0.2	0
4'	26.4	15.3	1	0.1	0.1	0.1
5'	30.7	18.6	7.9	0	0	0
6'	58.5	20	8.5	2.6	0.1	0
7'	59.7	23.2	8	3.8	1	0
8'	45.1	21.1	6.6	3.5	1.7	0.4
9'	31.7	15.2	5.2	3	1.6	0.7
10'	19.6	9.8	4	2.6	1.5	0.8

LIGHTING FACTS

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **833**
 Watts **14.4**
 Lumens per Watt (Efficacy) **57**

Color Accuracy
 Color Rendering Index (CRI) **90**

Light Color
 Correlated Color Temperature (CCT) **3000 (Bright White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-PN7HQ (8/16/2013)
 Model Number: P3LED09SP15930E E3AA3C [30° IR]
 Type: Luminaire - Downlight

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **741**
 Watts **14.4**
 Lumens per Watt (Efficacy) **51**

Color Accuracy
 Color Rendering Index (CRI) **90**

Light Color
 Correlated Color Temperature (CCT) **2700 (Warm White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-DC5A9K (8/16/2013)
 Model Number: P3LED09SP15927E E3AA3C [30° IR]
 Type: Luminaire - Downlight

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **799**
 Watts **14.3**
 Lumens per Watt (Efficacy) **55**

Color Accuracy
 Color Rendering Index (CRI) **90**

Light Color
 Correlated Color Temperature (CCT) **3000 (Bright White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-TC3BA2 (8/16/2013)
 Model Number: P3LED09SP15927E E3AA3C [30° IR]
 Type: Luminaire - Downlight

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **710**
 Watts **14.3**
 Lumens per Watt (Efficacy) **49**

Color Accuracy
 Color Rendering Index (CRI) **90**

Light Color
 Correlated Color Temperature (CCT) **2700 (Warm White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-TC3BA2 (8/16/2013)
 Model Number: P3LED09SP15927E E3AA3C [30° IR]
 Type: Luminaire - Downlight

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **1106**
 Watts **14.4**
 Lumens per Watt (Efficacy) **76**

Color Accuracy
 Color Rendering Index (CRI) **80**

Light Color
 Correlated Color Temperature (CCT) **3500 (Bright White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-3P7YHP (8/16/2013)
 Model Number: P3LED09SP15935E E3AA3C [30° IR]
 Type: Luminaire - Downlight

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **1215**
 Watts **14.4**
 Lumens per Watt (Efficacy) **84**

Color Accuracy
 Color Rendering Index (CRI) **80**

Light Color
 Correlated Color Temperature (CCT) **4000 (Bright White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-148Q7Y (8/16/2013)
 Model Number: P3LED09SP15940E E3AA3C [30° IR]
 Type: Luminaire - Downlight

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **1164**
 Watts **14.3**
 Lumens per Watt (Efficacy) **81**

Color Accuracy
 Color Rendering Index (CRI) **80**

Light Color
 Correlated Color Temperature (CCT) **4000 (Bright White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-4JYDP (8/16/2013)
 Model Number: P3LED09SP15935E E3AA3C [30° IR]
 Type: Luminaire - Downlight

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **1060**
 Watts **14.3**
 Lumens per Watt (Efficacy) **74**

Color Accuracy
 Color Rendering Index (CRI) **80**

Light Color
 Correlated Color Temperature (CCT) **3500 (Bright White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-PGHV27 (8/16/2013)
 Model Number: P3LED09SP15935E E3AA3C [30° IR]
 Type: Luminaire - Downlight

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **1050**
 Watts **14.4**
 Lumens per Watt (Efficacy) **72**

Color Accuracy
 Color Rendering Index (CRI) **80**

Light Color
 Correlated Color Temperature (CCT) **3000 (Bright White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-685MU (8/16/2013)
 Model Number: P3LED09SP15935E E3AA3C [30° IR]
 Type: Luminaire - Downlight

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **990**
 Watts **14.5**
 Lumens per Watt (Efficacy) **68**

Color Accuracy
 Color Rendering Index (CRI) **80**

Light Color
 Correlated Color Temperature (CCT) **2700 (Warm White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-5E7HT (8/16/2013)
 Model Number: P3LED09SP15927E E3AA3C [30° IR]
 Type: Luminaire - Downlight

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **1006**
 Watts **14.3**
 Lumens per Watt (Efficacy) **70**

Color Accuracy
 Color Rendering Index (CRI) **80**

Light Color
 Correlated Color Temperature (CCT) **3000 (Bright White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-EE2FA (8/16/2013)
 Model Number: P3LED09SP15935E E3AA3C [30° IR]
 Type: Luminaire - Downlight

lighting facts®
 A Program of the U.S. DOE

Light Output (Lumens) **948**
 Watts **14.3**
 Lumens per Watt (Efficacy) **66**

Color Accuracy
 Color Rendering Index (CRI) **80**

Light Color
 Correlated Color Temperature (CCT) **2700 (Warm White)**

Warm White Bright White Daylight

2700K 3000K 4500K 6500K

All results are according to IESNA LM-79-2008. Approved Method for the Electrical and Photometric Testing of Solid-State Lighting. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit www.lightingfacts.com for the Label Reference Guide.

Registration Number: F4QJ-7K7AT (8/16/2013)
 Model Number: P3LED09SP15927E E3AA3C [30° IR]
 Type: Luminaire - Downlight

Please see LightingFacts.com for a complete listing of products.

STICK T5 SINGLE LAMP PENDANT & RAIL PENDANT



ST48228-2-DPB-SD8

TYPE:

ORDER NUMBER:

PROJECT:

Model #	voltage	Options*	Dimming*
	1-120V	DPB S100P	SD3 SD9
	2-277V	SEM13 SAC	SD5 SD10
		SMB SFB5	SD8 SD11
		SWRB SFBW	

*See back page for details.

Please review mounting info before ordering.

Run Length:
(enter in multiples of 4 ft.)

Standard	Length	Wattage
ST48228	8'	2-28
ST48254	8'	2-54

Rail Mount	Length	Wattage
ST68228	8'	2-28
ST68254	8'	2-54


*Rail parts ordered separately.

Standard	Length	Wattage
ST44128	4'	1-28
ST44154	4'	1-54

Rail Mount	Length	Wattage
ST64128	4'	1-28
ST64154	4'	1-54

*Rail parts ordered separately.

STICK CONNECTING SECTIONS

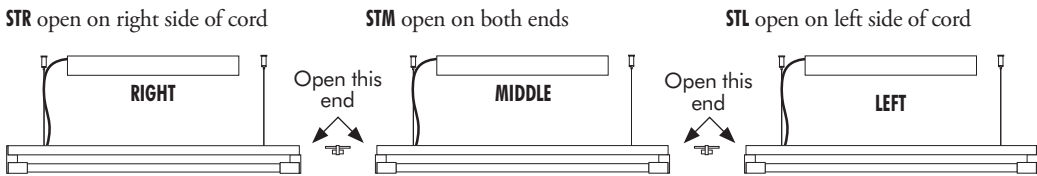

Standard	Length	Wattage	Standard	Length	Wattage	Standard	Length	Wattage
STR48228	8'	2-28	STM48228	8'	2-28	STL48228	8'	2-28
STR48254	8'	2-54	STM48254	8'	2-54	STL48254	8'	2-54
STR44128	4'	1-28	STM44128	4'	1-28	STL44128	4'	1-28
STR44154	4'	1-54	STM44154	4'	1-54	STL44154	4'	1-54
Rail Mount	Length	Wattage	Rail Mount	Length	Wattage	Rail Mount	Length	Wattage
STR68228	8'	2-28	STM68228	8'	2-28	STL68228	8'	2-28
STR68254	8'	2-54	STM68254	8'	2-54	STL68254	8'	2-54
STR64128	4'	1-28	STM64128	4'	1-28	STL64128	4'	1-28
STR64154	4'	1-54	STM64154	4'	1-54	STL64154	4'	1-54

DEL
RAY
LIGHTING
INCORPORATED

ST4 & ST6 / BARE

BURBANK,
CALIFORNIA,
91505
WWW.
DELRAY
LIGHTING.
COM

4' 54W

ST44154


1-54W HO T5

G5 socket

Total lumens: 5000 mean

Total luminaire efficiency: 95.9%

CP DISTRIBUTION

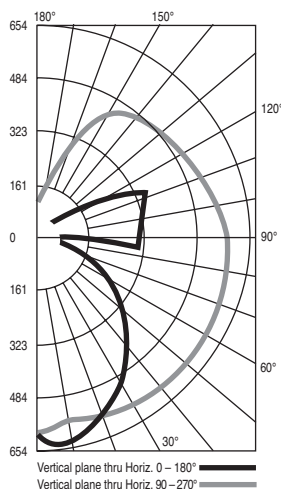

COEFFICIENTS


% CEILING 80 (20% FLOOR)

% WALL 70	50	30
0	97	97
1	83	78
2	74	66
3	67	57
4	61	50
5	55	44
6	51	39
7	47	35
8	43	32
9	40	29
10	38	26

OPTIONAL J-BOX COVER


Cover plate mounts to maximum 4" square J-box.

Ballast housing mounts to wall on top of cover plate, which may be painted to match ceiling or wall, and includes two mounting spacers to offset cover thickness. Order **ST00P**.



FLUSH MOUNT

22" flush mount ballast housing, for joist mount rough-in. Order **SFBS** (silver) or **SFBW** (white).



STICK CONSTRUCTION

INLINE PENDANT

- ST4 is a 4' or 8' dual inline pendant fixture that can stand alone or be connected to other 8' or 4' Stick sections. (See connection order info on opposite side). Each section requires its own power feed.
- ST6 may be connected to

a continuous overhead rail system.

- Zinc aluminum alloy and aluminum extrusion, with a matte anodized finish.
- Suspended with field-adjustable aircraft cable, with push-button glider.
- G5 twist-in lamp holders.

- 8' gray 18 AWG power cord.
- Standard output electronic ballasts are 120/277V, 50/60 Hz universal, in a remote housing.
- Back plate has a 7/8" opening for direct conduit feed and is not intended for J-box mount.
- U.L. listed for damp locations.


DIMMING INFORMATION

Standard Dimming

Due to lamp lead length limitations for dimming ballasts, all fixtures with two lamps require 4' ballast housings with a maximum cord drop of 3' on both sides of fixture to accommodate two ballasts. Voltage must be specified.

DPB Option

Mounts ballast housing directly to the fixture, for longer than 3 ft. mounting heights. Accommodates all dimming ballasts for 4 ft. and 8 ft. fixtures.

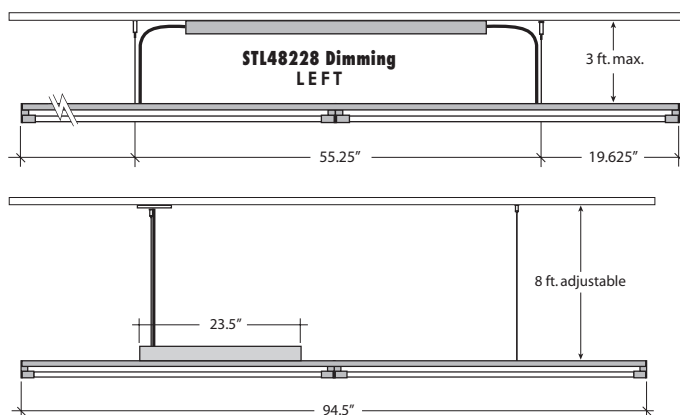


DIMMING BALLASTS

Cat. #	Type	Wattage
SD3	Advance Mark X	54
SD5	Advance Mark VII	28/54
SD8	Lutron Hi Lume H3D	28/54
SD9	Lutron Eco System EC5	28/54
SD10	Stepped dim, 50% for 2x28 only	2x28
SD11	Lutron EcoSystem H-Series EHD	28/54


BALLAST/RAIL MOUNT INFO

Stick ballast and rail housings are shipped with one opening for direct connection to conduit with a third party 1/2" fitting (as shown below). To locate input power elsewhere, an alternate 7/8" opening may be drilled at the job site anywhere along the top of the aluminum rail housing.

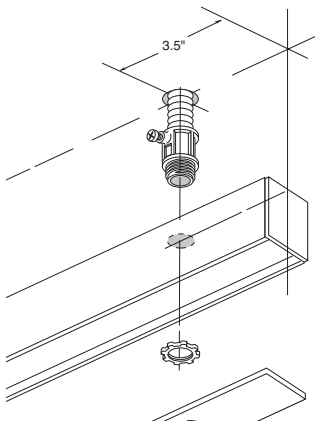


EMERGENCY BALLASTS

Emergency ballast provides 1300 lumens for 90 minutes. Charge light and test switch are visible from below. On 2 lamp fixture, lamp closest to power cord gets emergency power. Maximum 4' pendant length recommended. Voltage must be specified. Order **SEM13**.



RECESSED BALLAST


For suspended ceilings only. Order **SWRB**.



CONTINUOUS MOUNT INFORMATION

Stick features a sliding support cable at the end opposite the power cord, for those times when a straight shot to the ceiling isn't possible.

STJA—swivel connector rotates 240° and adds 7/16" to the overall length.

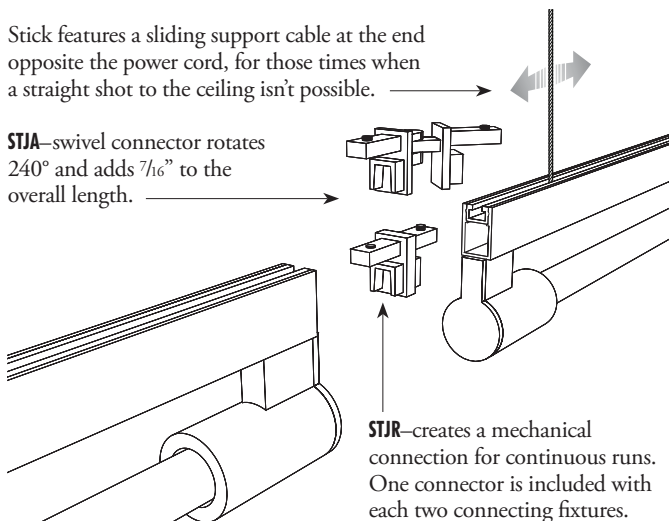



PENDANT MOUNT

ÉCLAIRAGE
axis
LIGHTING

1.800.263.AXIS
[T] 514.948.6272
[F] 514.948.6271
www.axislighting.com

● PROJECT INFORMATION


Project:

Notes:

Type:

● DIMENSIONS

SECTION VIEWS

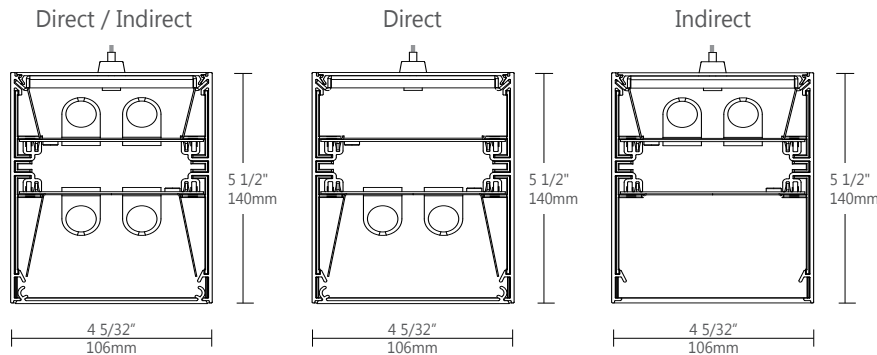

● ORDERING CODE

BB-F-NO-4-EX4-T5HO-A-A-W-277-D-1-D

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----

● PRODUCT SPECIFICATIONS

1	PRODUCT ID	2	OPTICS DIRECT	3	OPTICS INDIRECT	4	LENGTH/FT	5	SPECIFY LENGTH	6	LAMP
BB	pendant direct/indirect	S	satin lens	NO	no lens	2	2'	NL	nominal (3' & 4' lamps)	T5	T5
BBD	pendant direct	F	frosted lens ⁽¹⁾			3	3'	NL4	nominal (4' lamps only)	T5HO	T5HO
BBI	pendant indirect	PL	semi spec. para. louvers			4	4'	EX	exact (3' & 4' lamps)	T8	T8
		B	blank			5	5'	EX4	exact (4' lamps only)		
						6	6'				
						8	8'				
						12	12'				
						S#	System Run				
		(1) not recommended with staggered lamping									

7 DOWN LAMP		8 UP LAMP		9 MR		10 FINISH		11 VOLTAGE		12 BALLAST		13 CIRCUITS	
0	0 lamp	0	0 lamp	M16#	MR 16 halogen	AP	aluminum paint	120	120V	D	dimming	1	1 regular
1	1 lamp	1	1 lamp	M16LED#	MR 16 LED	W	white	277	277V	E	instant start ⁽³⁾	2	2 regular
2	2 lamp	2	2 lamps			C	custom	347	347V ⁽²⁾	ERS	rapid start	2A/B	2 alternating
+S	staggered	+S	staggered					UNV	universal	BI	bi-level dimming	+E#	emergency section
												+NL#	night light section
												+GTD#	generator transfer device
												+M	MR
Staggered lamping and configurations must be the same up and down		Staggered lamping and configurations must be the same up and down		Add 9" per lamp				(2) Please consult factory		(3) Available with T8 lamp only			

14	MOUNTING/SUSPENSION	15	BATTERY	16	OTHER	17	IC CONTROLS	18	CUSTOM
CA#	drywall+cable length (36" std.)	B#	battery pack 4' sections	D	dust cover	DS#	daylight sensor	C	custom
CT9-#	TB/TG 9/16+cable length (36" std.)			F	fuse	OS#	occupancy sensor		
CT15-#	TB/TG15/16+cable length (36" std.)					DS+OS#	daylight+occupancy sensor		
CTS#	ST+cable length (36" std.)					DOS#	daylight&occupancy sensor		
SA#	drywall+stem length >48" (18" std.)					See integrated controls guide for further details			Please specify
See ceiling mounting guide for further details									

Ballast, Battery Pack and Integrated Control Details and Custom Description:

● CONSTRUCTION

Housing	Extruded Aluminum (0.075" nominal) up to 70% Recycled Content
End Cap	Sheet Steel (18 ga)
Interior Brackets	Die Formed Sheet Steel (18 gauge)
Reflectors	White Powder Coated Sheet Steel (22 ga)
Louvers	Die Formed Semi-Specular Aluminum (22 ga)
White Louver	Die Formed Aluminum Painted White (22 ga)
Blank	Extruded Aluminum (0.075" nominal)
Lenses	Extruded Acrylic (0.070" nominal) Satin: 68% trans. Frosted: 85% trans.
Hanger	Die Formed Sheet Steel (16 gauge)
Suspension	Aircraft Cable or Ø 1/2" Stem
Cable Grips	Quick Connecting / Release

● WEIGHT

4 ft	14.5 lbs / 6.6 kg
8 ft	29.0 lbs / 13.2 Kg
12 ft	43.5 lbs / 19.7 Kg

● SYSTEM (S#)

BEAM 4 linear systems, with the use of a strong profile, allow for a nearly hair thin connection system of continuous runs. Lengths of 4', 8', 12' as well as custom lengths are available. Runs of BEAM 4 that are greater than 12' in length are designated as systems (S#). This means that the run is comprised of a combination of 4', 8' and/or 12' sections to be assembled on site using our joining system. For more information on systems and joining, please refer to the BEAM installation sheets available for download at www.axislighting.com.

● ELECTRICAL

Ballast Electronic IS, Electronic Rapid Start, Dimming (0-10V, Line, EcoSystem, DALI), BI-level dimming
 With preinstalled ballast disconnect as per NEC & CEC

Emergency Emergency battery pack or emergency circuit

Voltage 120V, 277V, 347V, UNV

i Incorporating these components may have limitations or effect the length of the luminaire, please contact factory for more details.

● FINISH


Aluminium paint, Powder Coated and custom finishes are also available.

● APPROVALS

Certified to UL and CUL standards _{US}
 Meets NYC requirements
 Suitable for damp locations.

● JOINERS

In order to allow very long runs of BEAM 4 luminaires, Axis has developed an effective joining system. Special care has been taken to maximize the performance of the joiner for each BEAM option.


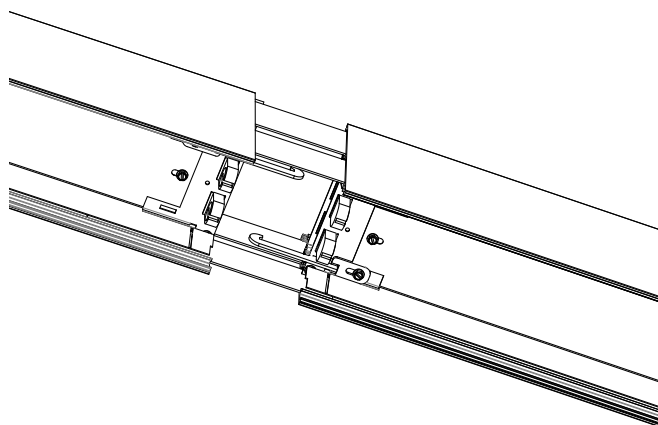


NOTE: Hang each system segment individually. Do not assemble system prior to hanging.


● STAGGERED LAMPING

When BEAM 4 is used in continuous runs longer than 4', staggered lamping can be used to eliminate the appearance of socket shadows at the ends of the lamps. BEAM 4 uses a staggered overlap of 4 different overlapping bracket lengths (3.5", 4", 4.5" and 5"), along with 3' and 4' lamps, allowing us to match almost any row length requirements with optimal results. For example 3 x 3' staggered T5 lamps can be used to completely illuminate the lens of an 8' nominal luminaire.


LAMP TYPE	T5	T5HO	T8
1 lamp	•	•	•
2 lamps	•	•	•



● OPTICS




S satin lens



F frosted lens

SATIN & FROSTED LENS

(acrylic snap-in lens)
 satin: 68% trans.
 frosted: 85% trans.



PL semi-specular
 parabolic louvers


LOUVERS

(semi-spec. parabolic louver
 9/16" deep blades – 5/8" spacing
 72 blades per 4')


● CORNERS

Unlit Corners - BEAM4


features a multitude of layout patterns with the use of a number of corners, 90° corner, T or X junctions.




90° unlit corner



90° corner




X junction



T junction

Lit Corners - In addition Axis offers Lit 90° Corners including Ceiling to Ceiling, Wall to Ceiling and Ceiling to Wall.



wall to ceiling
 lit corner

i For custom corner angles, please consult factory. Specifications sheets for all corners are available at: www.axislighting.com


● MR16

Blank MR16 Halogens MR16 LED Quantity

Extruded Aluminum (0.075" nominal)
 2.0" diameter (35W / 50W)
 2.0" diameter

For every 4' fluorescent lamp section, there may be up to a maximum of 4 x MR16 lamps.


Spacing




Each MR16 is placed centered on a blank section 9" in length.

For a series of MR16's within a given section length, they will be spaced evenly on a longer blank section. The directed light of MR16 Halogen lamps are fixed downward. Custom spacing may be available on special request.


Between fluorescent lamps sections

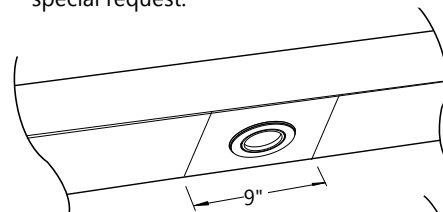

At luminaire ends

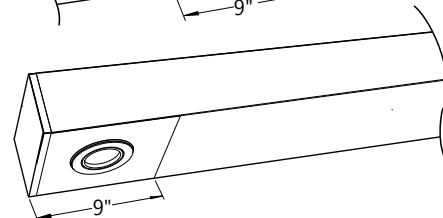


Several in a long blank section

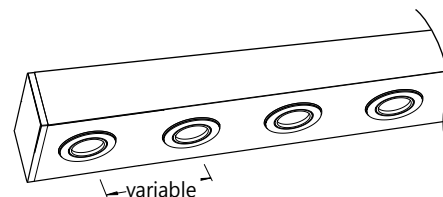


● MOUNTING SPACING END TO END

T5/T5HO LAMP	4'	(46 ⁵ / ₁₆ " C.C.)
	8'	(92 ⁵ / ₈ " C.C.)
	12'	(138 ¹⁵ / ₁₆ " C.C.)




T8 LAMP	4'	(48" C.C.)
	8'	(96" C.C.)
	12'	(144" C.C.)




● MOUNTING SPACING STAGGERED

T5/T5HO 1 LAMP	T5/T5HO 2 LAMP
8' 3X3' (95 ¹ / ₂ " C.C.)	4' (50 ⁵ / ₁₆ " C.C.)
8' 2X4' (88 ⁵ / ₈ " C.C.)	8' (96 ⁵ / ₈ " C.C.)
12' 3X4' (130 ¹⁵ / ₁₆ " C.C.)	12' (142 ¹⁵ / ₁₆ " C.C.)
12' 2X4'+2X3' (149 ⁵ / ₈ " C.C.)	



T8 1 LAMP	T8 2 LAMP
8' (92" C.C.)	4' (52" C.C.)
12' (136" C.C.)	8' (100" C.C.)
	12' (148" C.C.)

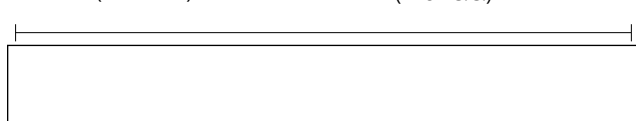

i Row configuration and mounting spacing file is available for download at: www.axislighting.com


● OTHER MOUNTING OPTIONS

BEAM 4 is also available with recessed, surface, wall, asymmetric, recessed wall and wall wash mounted options.


i Specification sheets and Installation sheets for all mounting for BEAM luminaires are available for download at www.axislighting.com

● MOUNTING OPTIONS

CT TILE CEILING - ON GRID




Power feed




Non power feed

CA DRYWALL CEILING

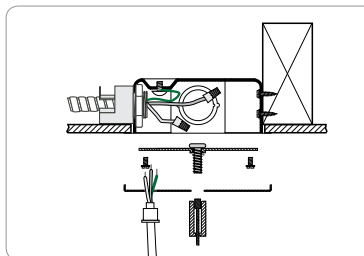


Power feed




Non power feed

SA STEM MOUNT IN DRYWALL CEILING

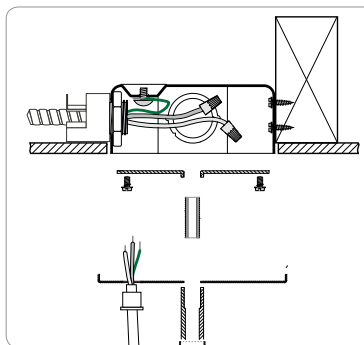


Power feed



Non power feed

● INTEGRATED CONTROL OPTIONS

BEAM 4 luminaires allow the use of integrated controls such as daylight sensors (DS), occupancy sensors (OS), individual daylight sensors and occupancy sensors (DS+OS), and combination daylight/occupancy sensors (DOS). These options can be seamlessly integrated into our luminaires. The control system could be used to optimize the lighting of the space by reducing energy consumption through daylight harvesting and occupancy, thereby improving the overall interior environment and allowing for LEED credits.

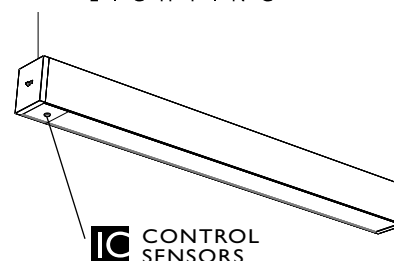


- Consult factory for other options.
- Refer to IC brochure for more information.


SENSORS	BRAND	Model	TYPE	CODE	COMPATIBLE DIMMING BALLAST
Daylight Sensor (DS)	Lutron	EC-DIR-WH	Daylight	LD	EcoSystem
	Wattstopper	FD-301	Daylight	WD	0-10V
	Philips	Luxsense	Daylight	PL	0-10V
Occupancy Sensor (OS)	Wattstopper	FS-205	PIR Occupancy	WP1	Programmed Rapid Start
		FS-355	PIR Occupancy	WP2	Programmed Rapid Start
		FM-105	High Frequency Occupancy	WH	Programmed Rapid Start
Daylight & Occupancy Sensors (DOS)	Philips	Actilume	Daylight & PIR Occupancy	PA	DALI or 0-10V

● PHOTOMETRIC DATA

2 T5



PHOTOMETRIC CURVE

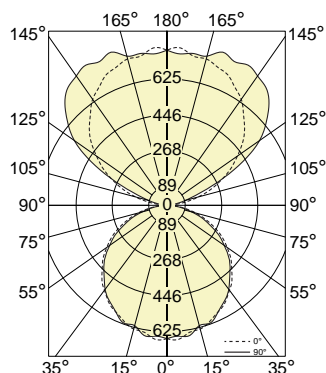

Test Lamp: 2xT5
 IES FILE: BB-S-FL-4-T5-1-1

Efficiency: 77.6%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	657	657	657	657	657	
5	662	633	654	643	647	35
15	631	627	629	629	613	150
25	584	590	587	580	587	250
35	528	526	525	520	524	318
45	451	445	449	447	439	345
55	361	361	351	349	343	329
65	259	253	248	242	236	267
75	147	141	136	134	126	171
85	47	44	36	33	31	67
90	6	5	3	2	2	
95	30	24	19	17	16	13
105	160	196	132	104	93	112
115	295	373	377	314	285	286
125	423	502	560	562	557	448
135	540	595	671	706	710	502
145	638	673	721	768	778	468
155	709	718	752	788	782	376
165	747	746	758	771	761	249
175	778	755	768	747	749	108
180	764	764	764	764	764	

COEFFICIENTS OF UTILIZATION (%)

Ceiling	80				70				50			
Wall	70	50	30	10	70	50	30	10	50	30	10	10
0	82	82	82	82	75	75	75	75	62	62	62	
1	75	71	68	65	68	65	62	60	54	52	50	
2	68	62	57	53	62	57	53	49	47	44	41	
3	62	54	49	44	56	50	45	41	41	38	34	
4	56	48	42	37	51	44	39	34	36	32	29	
5	52	43	36	32	47	39	33	29	33	28	25	
6	47	38	32	27	43	35	29	25	29	25	22	
7	44	34	28	24	40	31	26	22	26	22	19	
8	41	31	25	21	37	29	23	19	24	20	17	
9	38	28	22	18	34	26	21	17	22	18	15	
10	35	26	20	16	32	24	19	15	20	16	13	

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	4510	2537	2162
55	4273	2022	1684
65	3895	1501	1187
75	3176	897	673
85	1863	272	184


i All IES files for other lamping are available for download at: www.axislighting.com

● PHOTOMETRIC DATA

2 T5



PHOTOMETRIC CURVE

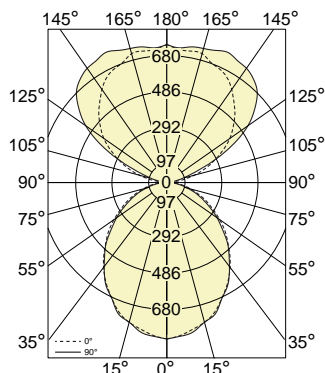

Test Lamp: 2xT5

IES FILE: BB-F-FL-4-T5-1-1

Efficiency: 80.6%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	875	875	875	875	875	
5	858	854	858	864	863	45
15	810	813	817	810	808	196
25	720	724	728	719	721	313
35	610	613	608	610	608	376
45	481	480	477	477	477	378
55	357	354	346	341	339	329
65	238	234	228	222	217	250
75	133	132	123	118	113	155
85	46	42	36	32	30	63
90	6	4	3	2	1	
95	30	23	18	17	16	13
105	161	195	132	102	93	111
115	294	376	375	316	290	288
125	429	498	561	563	553	448
135	537	596	672	703	713	502
145	631	668	725	769	777	467
155	698	722	753	778	802	376
165	747	750	758	770	775	249
175	746	778	749	763	755	108
180	770	770	770	770	770	

COEFFICIENTS OF UTILIZATION (%)


Ceiling	80				70				50			
Wall	70	50	30	10	70	50	30	10	50	30	10	10
0	85	85	85	85	78	78	78	78	65	65	65	65
1	78	75	71	69	71	68	66	63	57	55	53	53
2	71	65	60	56	65	60	56	52	50	47	44	44
3	65	57	52	47	59	53	48	44	44	40	37	37
4	59	51	45	40	54	47	41	37	39	35	32	32
5	55	45	39	34	50	42	36	32	35	31	28	28
6	50	41	34	30	46	38	32	28	32	27	24	24
7	46	37	30	26	42	34	28	24	29	24	21	21
8	43	33	27	23	39	31	25	22	26	22	19	19
9	40	30	24	20	37	28	23	19	24	20	17	17
10	37	28	22	18	34	26	21	17	22	18	15	15

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	4817	2695	2349
55	4221	1990	1665
65	3584	1383	1091
75	2868	810	602
85	1851	268	178

3 T5



PHOTOMETRIC CURVE

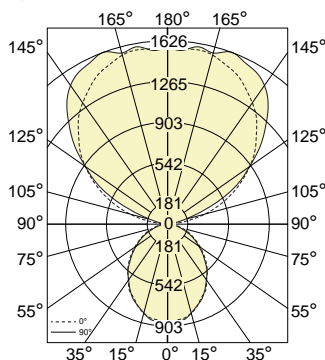

Test Lamp: 3xT5

IES FILE: BB-F-FL-4-T5-1-2

Efficiency: 80.9%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	888	888	888	888	888	
5	856	869	863	861	868	45
15	817	811	814	816	816	196
25	715	720	729	724	728	313
35	606	607	608	616	602	375
45	488	483	476	475	474	379
55	356	355	351	341	339	330
65	235	234	230	221	220	249
75	134	132	121	116	113	155
85	47	43	36	32	30	63
90	6	5	3	2	2	
95	67	40	29	27	25	21
105	347	356	246	173	156	202
115	627	697	633	569	528	531
125	890	989	984	918	890	800
135	1115	1214	1278	1259	1233	938
145	1313	1379	1455	1480	1501	925
155	1462	1477	1546	1585	1594	764
165	1551	1550	1571	1612	1570	515
175	1562	1557	1567	1576	1546	224
180	1574	1574	1574	1574	1574	

COEFFICIENTS OF UTILIZATION (%)

Ceiling	80				70				50			
Wall	70	50	30	10	70	50	30	10	50	30	10	10
0	83	83	83	83	74	74	74	74	58	58	58	58
1	76	72	69	66	68	65	62	60	51	49	48	48
2	69	63	58	54	62	57	53	49	45	42	40	40
3	63	55	50	45	56	50	45	41	40	36	33	33
4	57	49	43	38	51	44	39	35	35	31	28	28
5	53	44	37	33	47	39	34	30	31	27	24	24
6	48	39	33	28	43	35	30	26	28	24	21	21
7	45	35	29	25	40	32	26	23	26	22	19	19
8	41	32	26	22	37	29	24	20	23	19	16	16
9	38	29	23	19	34	26	21	18	21	17	15	15
10	36	26	21	17	32	24	19	16	19	16	13	13

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	4885	2689	2334
55	4217	2023	1664
65	3542	1394	1109
75	2887	798	602
85	1889	271	178


ⓘ All IES files for other lamping are available for download at: www.axislighting.com

● PHOTOMETRIC DATA

3 T5HO



PHOTOMETRIC CURVE



Test Lamp: 3xT5HO

IES FILE: BB-S-FL-4-T5HO-1-2

Efficiency: 78.9%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	1118	1118	1118	1118	1118	
5	1115	1129	1141	1121	1172	61
15	1102	1071	1088	1077	1080	258
25	1009	1021	1021	1005	1005	430
35	911	920	899	900	891	549
45	779	770	773	764	748	593
55	619	617	609	605	590	564
65	454	439	433	424	419	463
75	253	253	236	227	228	297
85	85	73	64	57	53	116
90	11	9	5	4	3	
95	111	67	50	44	44	36
105	597	607	420	302	274	348
115	1074	1206	1087	986	917	917
125	1548	1713	1699	1587	1534	1380
135	1931	2098	2211	2161	2117	1618
145	2240	2381	2519	2567	2560	1594
155	2526	2547	2659	2745	2746	1318
165	2629	2673	2679	2741	2766	887
175	2816	2759	2671	2753	2680	389
180	2683	2683	2683	2683	2683	

COEFFICIENTS OF UTILIZATION (%)


Ceiling	80				70				50			
Wall	70	50	30	10	70	50	30	10	50	30	10	10
0	81	81	81	81	72	72	72	72	56	56	56	
1	73	70	67	64	65	63	60	58	49	47	46	
2	67	61	56	52	59	55	51	47	43	40	38	
3	61	53	48	43	54	48	43	39	38	34	32	
4	55	47	41	36	49	42	37	33	33	30	27	
5	51	42	36	31	45	38	32	28	30	26	23	
6	47	37	31	27	41	34	28	24	27	23	20	
7	43	33	27	23	38	30	25	21	24	20	17	
8	40	30	24	20	35	27	22	18	22	18	15	
9	37	27	22	18	33	25	20	16	20	16	13	
10	34	25	19	16	31	23	18	15	18	14	12	

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	7793	4367	3685
55	7325	3507	2891
65	6835	2621	2110
75	5444	1557	1218
85	3390	476	312

2 T5HO



PHOTOMETRIC CURVE

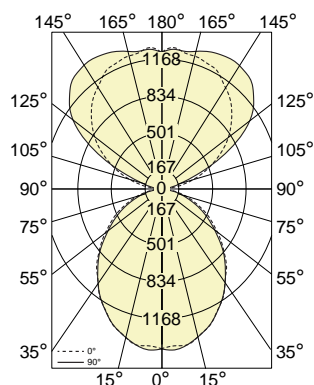

Test Lamp: 2xT5HO

IES FILE: BB-F-FL-4-T5HO-1-1

Efficiency: 80.6%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	1487	1487	1487	1487	1487	
5	1464	1470	1478	1482	1502	80
15	1404	1396	1407	1402	1407	337
25	1246	1260	1246	1248	1249	540
35	1041	1048	1046	1045	1044	646
45	833	835	830	819	819	651
55	609	609	605	585	580	568
65	412	408	395	382	374	433
75	231	226	214	205	199	268
85	81	70	62	55	51	109
90	10	8	4	3	3	
95	51	40	32	28	28	22
105	279	340	229	176	166	192
115	508	645	652	544	492	495
125	739	864	965	972	950	771
135	931	1021	1156	1225	1220	864
145	1091	1150	1248	1321	1349	808
155	1224	1233	1301	1343	1372	649
165	1278	1286	1313	1333	1330	431
175	1325	1325	1295	1316	1308	187
180	1271	1271	1271	1271	1271	

COEFFICIENTS OF UTILIZATION (%)

Ceiling	80				70				50			
Wall	70	50	30	10	70	50	30	10	50	30	10	10
0	86	86	86	86	78	78	78	78	65	65	65	
1	78	75	72	69	71	69	66	63	57	55	53	
2	71	65	60	56	65	60	56	52	50	47	44	
3	65	57	52	47	59	53	48	44	44	41	37	
4	59	51	45	40	54	47	41	37	39	35	32	
5	55	45	39	34	50	42	36	32	35	31	28	
6	50	41	34	30	46	38	32	28	32	27	24	
7	46	37	30	26	43	34	28	24	29	24	21	
8	43	33	27	23	39	31	25	22	26	22	19	
9	40	30	24	20	37	28	23	19	24	20	17	
10	37	28	22	18	34	26	21	17	22	18	15	

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	8331	4693	4034
55	7212	3481	2844
65	6201	2395	1884
75	4972	1413	1060
85	3256	461	302


i All IES files for other lamping are available for download at: www.axislighting.com

● PHOTOMETRIC DATA

2 T8



PHOTOMETRIC CURVE

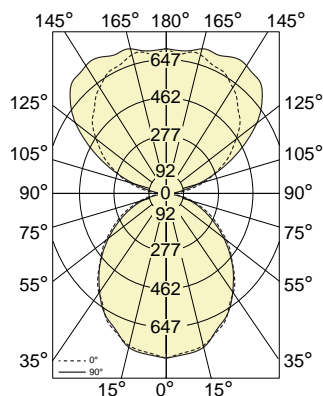

Test Lamp: 2xT8

IES FILE: BB-F-FL-4-T8-1-1

Efficiency: 77.9%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	829	829	829	829	829	
5	810	832	827	814	818	33
15	778	776	780	779	785	143
25	702	693	700	689	695	238
35	591	586	586	585	582	302
45	462	465	460	462	457	329
55	343	344	337	331	328	312
65	233	226	226	218	210	255
75	130	127	119	115	111	163
85	46	41	35	31	30	64
90	6	4	3	2	2	
95	33	24	19	16	16	13
105	159	192	155	124	115	120
115	284	363	355	318	304	290
125	405	486	541	525	513	427
135	522	573	643	677	680	482
145	610	642	701	743	749	450
155	680	689	724	747	765	362
165	716	722	732	746	758	241
175	710	745	727	735	728	105
180	735	735	735	735	735	

COEFFICIENTS OF UTILIZATION (%)


Ceiling	80				70				50			
Wall	70	50	30	10	70	50	30	10	50	30	10	10
0	83	83	83	83	76	76	76	76	63	63	63	63
1	76	72	69	66	69	66	64	61	55	53	52	52
2	69	63	58	54	63	58	54	51	48	45	43	43
3	63	56	50	45	57	51	46	42	43	39	36	36
4	57	49	43	38	52	45	40	36	38	34	31	31
5	53	44	38	33	48	40	35	31	34	30	27	27
6	49	39	33	29	44	36	31	27	31	26	23	23
7	45	35	29	25	41	33	27	23	28	24	20	20
8	42	32	26	22	38	30	24	21	25	21	18	18
9	39	29	24	20	36	27	22	19	23	19	16	16
10	36	27	21	18	33	25	20	17	21	17	15	15

Based on floor reflectance of 20


LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	4478	2513	2173
55	3934	1878	1554
65	3406	1322	1020
75	2731	763	574
85	1807	253	168

3 T8



PHOTOMETRIC CURVE

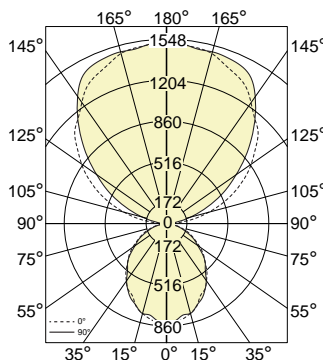

Test Lamp: 3xT8

IES FILE: BB-F-FL-4-T8-1-2

Efficiency: 74.4%

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	825	825	825	825	825	
5	836	821	826	807	824	44
15	783	781	788	778	785	188
25	673	705	700	695	701	300
35	587	585	583	588	583	361
45	459	458	464	457	461	362
55	344	339	338	330	321	317
65	230	229	222	213	211	241
75	128	127	121	113	115	150
85	45	41	34	31	30	61
90	7	4	3	2	2	
95	69	38	26	21	21	19
105	352	284	221	193	182	192
115	626	612	497	444	435	453
125	871	915	809	743	710	683
135	1096	1142	1130	1039	1012	824
145	1248	1304	1347	1344	1309	841
155	1395	1425	1459	1483	1484	720
165	1494	1485	1524	1524	1511	492
175	1527	1543	1523	1548	1533	218
180	1530	1530	1530	1530	1530	

COEFFICIENTS OF UTILIZATION (%)

Ceiling	80				70				50			
Wall	70	50	30	10	70	50	30	10	50	30	10	10
0	77	77	77	77	69	69	69	69	54	54	54	54
1	70	67	64	61	63	60	58	56	48	46	45	45
2	64	58	54	50	57	53	49	46	42	39	37	37
3	58	51	46	42	52	46	42	38	37	34	31	31
4	53	45	40	35	48	41	36	32	33	29	26	26
5	49	40	34	30	44	36	31	28	29	26	23	23
6	45	36	30	26	40	33	28	24	26	23	20	20
7	41	32	27	23	37	29	24	21	24	20	17	17
8	38	29	24	20	34	27	22	18	22	18	15	15
9	36	27	21	18	32	24	20	16	20	16	14	14
10	33	24	19	16	30	22	18	15	18	15	12	12

Based on floor reflectance of 20

LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	4446	2537	2192
55	3945	1882	1519
65	3357	1298	1027
75	2693	769	592
85	1773	250	172


i All IES files for other lamping are available for download at: www.axislighting.com

PROJECT INFORMATION

Project:


Type:

IMPORTANT – all corner patterns must be submitted with drawings indicating dimensions and angles degree.

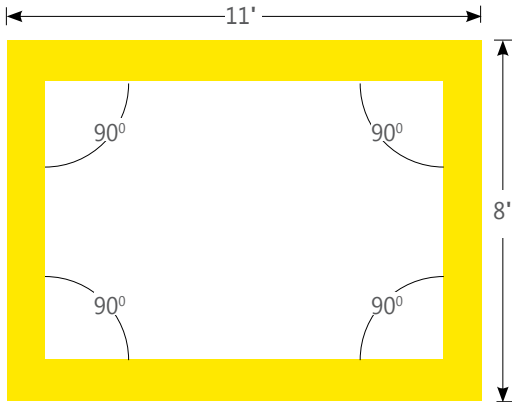


BMDPAT	REC	90+90+90+90	38'
1	2	3	5

TOP VIEW - Rectangle Corner Patterns

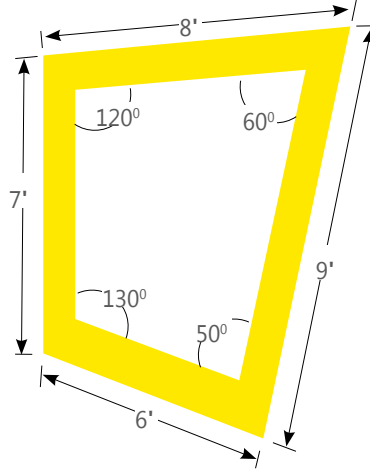

BDPAT	ASO	120+60+50+130	30'
1	2	3	5

TOP VIEW - Corner Patterns

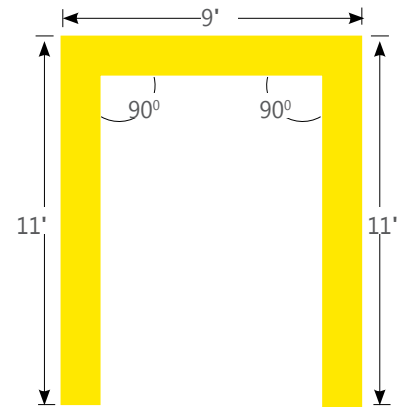

BBDPAT	OPR	90+90	31'
1	2	3	5

TOP VIEW - Open Shape Corner Pattern

NOTE: Pattern length is determined by lamp length

ORDERING CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----

PRODUCT SPECIFICATIONS

1	PRODUCT ID	2	PATTERNS	3	CORNER DEGREES	4	OPTICS DIRECT	5	LENGTH/FT	6	SPECIFY LENGTH
BDPAT	beam2 pendant direct	SQ	square regular lit corners	90	90 degrees	S	satin lens	#	total pattern length	NL	nominal (3' & 4' lamps)
BIPAT	beam2 pendant indirect	REC	rectangle regular lit corners	#	other degree	F	frosted lens ⁽¹⁾			NL4	nominal (4' lamps only)
TBPAT	twinbeam pendant direct/indirect	ASO	other shape regular lit corners							EX	exact (3' & 4' lamps)
TBDPAT	twinbeam pendant direct	OPR	open shape regular lit corners							EX4	exact (4' lamps only)
TBIPAT	twinbeam pendant indirect										
BMDPAT	beam3 pendant direct										
BMIPAT	beam3 pendant indirect										
BBPAT	beam4 pendant direct/indirect										
BBDPAT	beam4 pendant direct										
BBIPAT	beam4 pendant indirect										
B6PAT	beam6 pendant direct/indirect										
B6DPAT	beam6 pendant direct										
B6IPAT	beam6 pendant indirect										
						(1) not recommended with staggered lamping					

7	LAMP	8	DOWN LAMP	9	UP LAMP	10	FINISH	11	VOLTAGE	12	BALLAST
T5	T5	0	0 lamp	0	0 lamp	AP	aluminum paint	120	120V	D	dimming
T5HO	T5HO	1	1 lamp	1	1 lamp	W	white	277	277V	E	instant start
T8	T8 ⁽²⁾	2	2 lamps ⁽³⁾	2	2 lamps ⁽⁵⁾	C	custom	347	347V ⁽⁷⁾	ERS	rapid start
		+S	staggered ⁽⁴⁾	+S	staggered ⁽⁶⁾			UNV	universal	BI	bi-level dimming
(2) not available for beam2 and beam3 staggered		(3) not available for beam2 and beam3 (4) only T5/T5HO 1 lamp staggered for beam2 and beam3		(5) not available for beam2 and beam3 (6) only T5/T5HO 1 lamp staggered for beam2 and beam3				(7) Please consult factory			

13	CIRCUITS	14	MOUNTING/SUSPENSION	15	BATTERY	16	OTHER	17	CUSTOM
1	1 regular	CA#	drywall+cable length (36"std)	B#	battery pack 4' sections	F	fuse	C	custom
2	2 regular	CT9-#	TB/TG 9/16+cable length (36" std.)			D	dust cover		
2A/B	2 alternating	CT15-#	TB/TG15/16+cable length (36" std.)						
+E#	emergency section	CTS#	ST+cable length (36" std.)						
+NL#	night light section	SA	drywall+stem length>48 (18"std)						
+GTD#	generator transfer device								
									Please specify

FILE NAME:Beam Pendant LC November 20, 2014

● LIT CORNER FEATURES


The Lit Corner system allows continuous illumination all the way through the corner section

To optimize corner illumination, lit corners are created as integral components of the linear sections. Linear sections have mitered ends that connect to corresponding mitered ends of neighboring linear sections.

Illuminated Corners are more complex. Because the corner is fully illuminated, the corner is not independent of the straight sections, but integrated into the straight segment's housing. The corner is mitered, allowing a seamless line of light.

Regular Illuminated Corner - A fully illuminated corner that lies on the same plane, for example, the ceiling. There are two corner options available for Regular Lit Corners: **Open Shape Corner** and **Closed Shape Corner**

TIP: Provide sketches illustrating corner types and locations required.

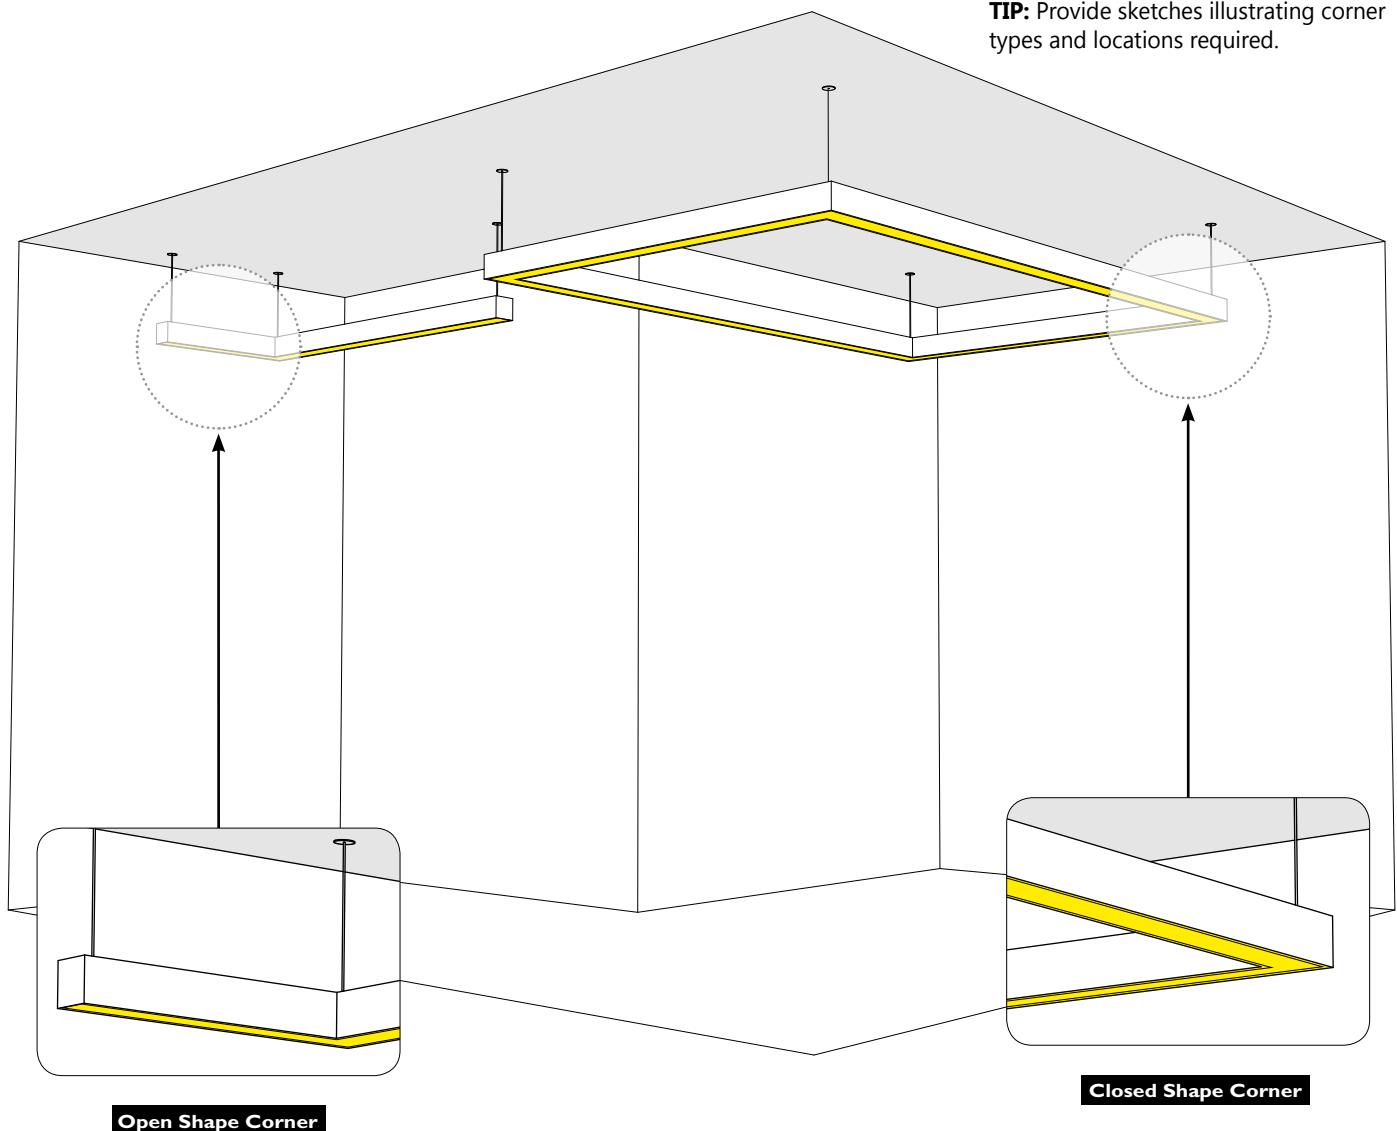



A large grid of 30 columns and 30 rows, intended for drawing corner patterns. The grid lines are thin and light gray.



PENDANT
DIRECT/INDIRECT


ÉCLAIRAGE 1.800.263.AXIS
axis [T] 514.948.6272
LIGHTING [F] 514.948.6271
www.axislighting.com

PROJECT INFORMATION


Project:

Type:

Notes:

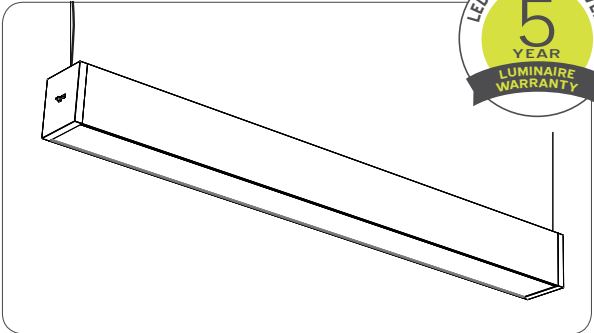

DIMENSIONS -SECTION VIEWS

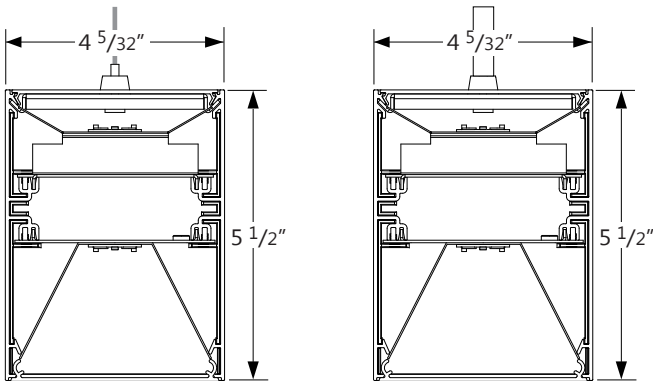

CABLE

STEM

PERFORMANCE PER LINEAR FOOT AT 3500K

NOMINAL LUMEN OUTPUT		INPUT WATTS*	EFFICACY
UPLIGHT	DOWNLIGHT		
640 lm/ft	320 lm/ft	8.61 W/ft	110 lm/W

Please consult factory for custom lumen output and wattage.

ORDERING CODE

BBDILED-B3-640-320-40-SO-4-MR16LED-AP-277-D-1

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----

PRODUCT SPECIFICATIONS

1 PRODUCT ID		2 VERSION		3 NOM. LUMENS/FT UPLIGHT		4 NOM. LUMENS/FT DOWNLIGHT		5 COLOR TEMPERATURE	
BBDILED	pendant direct/indirect led	B3	B3 (factory preset)	640	640 lm/ft uplight	320	320 lm/ft downlight	35	3500 K
								30	3000 K ⁽¹⁾
								40	4000 K ⁽¹⁾
									Colour temperature is both for direct and indirect (1) 8 week lead time for 3000K and 4000K
6 SHIELDING		7 LENGTH		8 MR		9 FINISH		10 VOLTAGE	
SO	spotless lens	2 2'		M16LED#	MR 16 LED	AP	aluminum paint	120	120V
		3 3'				W	white	277	277V
		4 4'				C	custom	UNV	universal
		5 5'							
		8 8'							
		12 12'							
		S# System Run							
				Add 9" per lamp				(2) Standard with LED (3) Please consult factory	
13 MOUNTING/SUSPENSION		14 BATTERY		15 OTHER		16 IC CONTROLS		17 CUSTOM	
CA#	drywall+cable length (36" std.)	B#	battery pack 4' sections	F	fuse	DS#	daylight sensor	C	custom
CT9-#	TB/TG 9/16+cable length (36" std.)			D	dust cover	OS#	occupancy sensor		
CT15-#	TB/TG15/16+cable length (36" std.)								
CTS-#	ST+cable length (36" std.)								
SA#	drywall+stem length >48" (18" std.)								
+SM	seismic option								
				Please consult factory		See integrated controls guide for further details		Please specify	

Driver, Battery Pack and Integrated Control Details and Custom Description:

● SPECIFICATIONS

CONSTRUCTION

Housing	Extruded Aluminum (0.075" nominal) up to 70% recycled content
End Cap	Sheet Steel (18 ga)
Interior Brackets	Die Formed Sheet Steel (18 ga)
Reflectors	White Powder Coated Sheet Steel (22 ga)
Blank	Extruded Aluminum (0.075" nominal)
Lens	Spotless frosted acrylic lens
Hanger	Die Formed Sheet Steel (16 gauge)
Suspension	Aircraft Cable or Ø 1/2" Stem
Cable Grips	Quick Connecting / Release


ELECTRICAL

LED	Use of OptimaLED technology based on mid-flux LED
Input Voltage	120V, 277V, UNV.
Driver	Dimming, HiLume, EcoSystem, DALI, Bi-Level dimming
CRI	Minimum 80 color rendering index
CCT	Choice of 3000K, 3500K and 4000K color temperature with a great color consistency (within 3.5-step MacAdam ellipse).
LED life	Minimum 50,000h with 70% of lumen maintenance in 25°C ambient temperature, in compliance with IES LM-80 testing measurements.
Thermal management	Aluminium housing acting as the heat spreader to maximize life.
Emergency	Emergency battery pack or emergency circuit optional.

● WARRANTY

Axis lighting will warrant defective LEDs, boards, and drivers for 5 years from date of purchase. Warranty is valid if luminaire is installed and used according to specifications. If defective, Axis will send replacement boards or drivers at no cost along with detailed replacement instructions and instructions on how to return defective components to Axis.


● APPROVALS

Certified to UL and CUL standards 
 Meets NYC requirements
 Suitable for damp locations.

● SYSTEM (S#)

BEAM 4 linear systems, with the use of a strong profile, allow for a nearly hair thin connection system of continuous runs. Lengths of 4', 8', 12' as well as custom lengths are available. Runs of BEAM 4 that are greater than 12' in length are designated as systems (S#). This means that the run is comprised of a combination of 4', 8' and/or 12' sections to be assembled on site using our joining system. For more information on systems and joining, please refer to the BEAM installation sheets available for download at www.axislighting.com.

● OPTICS




50 spotless lens

SPOTLESS LENS

Frosted acrylic snap-in lens with micro lens

● JOINERS


In order to allow very long runs of BEAM 4 luminaires, Axis has developed an effective joining system. Special care has been taken to maximize the performance of the joiner for each BEAM option.

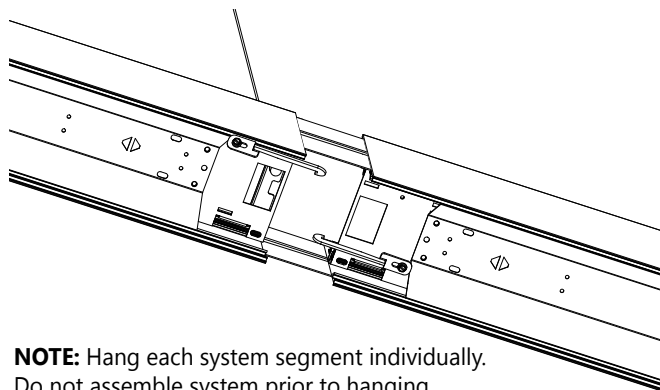


● CORNERS

Unlit Corners - BEAM4

features a multitude of layout patterns with the use of a number of corners, 90° corner, T or X junctions.



90° unlit corner

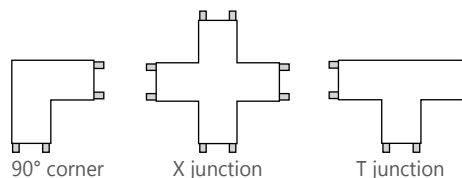


90° corner

X junction

T junction

Lit Corners - In addition Axis offers Lit 90° Corners including Ceiling to Ceiling, Wall to Ceiling and Ceiling to Wall.



wall to ceiling
lit corner

i For custom corner angles, please consult factory. Specifications sheets for all corners are available at: www.axislighting.com

● WEIGHT


4 ft	14.5 lbs / 6.6 kg
8 ft	29.0 lbs / 13.2 kg
12 ft	43.5 lbs / 19.7 kg

● FINISH


Powder Coated and custom finishes are also available.

● MOUNTING OPTIONS

CT TILE CEILING - ON GRID




Power feed




Non power feed

CA DRYWALL CEILING

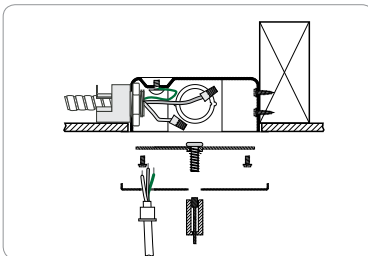


Power feed




Non power feed

SA STEM MOUNT IN DRYWALL CEILING

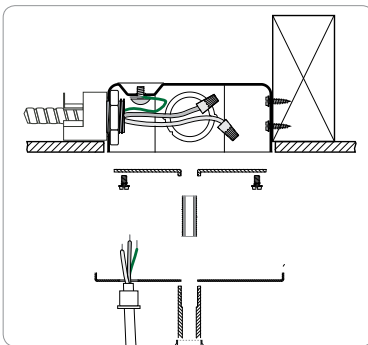

Power feed



Non power feed

● MOUNTING SPACING END TO END

4' (48" C.C.)
 8' (96" C.C.)
 12' (144" C.C.)



i Row configuration and mounting spacing file is available for download at: www.axislighting.com

● MR16 LED LAMPS


Blank MR16 LED Quantity

Extruded Aluminum (0.075" nominal)
 2.0" diameter

For every 4' section, there may be up to a maximum of 4 x MR16 LED lamps.

Each MR16 LED lamp is placed centered on a blank section 9" in length.

Spacing




For a series of MR16's within a given section length, they will be spaced evenly on a longer blank section.


The directed light of MR16 LED lamps are fixed downward.

Custom spacing may be available on special request.


Between sections

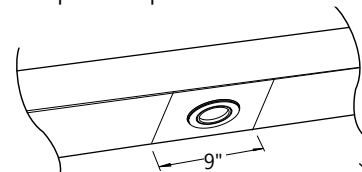

At luminaire ends

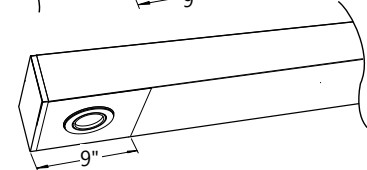

Several in a long blank section

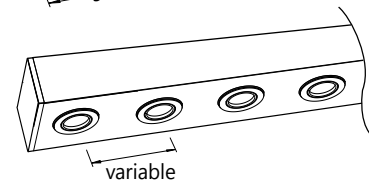

Base Type GU 5.3
Beam Angle 40 nominal degrees
Input Watts 6W
Numinal Lumens 300 lumens
Efficacy 50 lumens per watt
Color Rendering Index (CRI) 85

Central Beam Candle Power (CBCP)

584 candelas

Life 25,000 hours at L₇₀

Correlated color temperature (CCT)

2700K

i More options are available upon request. Please consult factory.

● OTHER MOUNTING OPTIONS


BEAM 4 LED is also available with recessed, surface, wall and recessed vertical mounted options.

i Specification sheets and Installation sheets for all mounting for BEAM luminaires are available for download at www.axislighting.com

● INTEGRATED CONTROL OPTIONS

BEAM 4 LED luminaires allow the use of integrated controls such as daylight sensors (DS), occupancy sensors (OS) and combination daylight/occupancy sensors (DOS). These options can be seamlessly integrated into our luminaires. The control system could be used to optimize the lighting of the space by reducing energy consumption through daylight harvesting and occupancy, thereby improving the overall interior environment and allowing for LEED credits.


- Consult factory for other options.

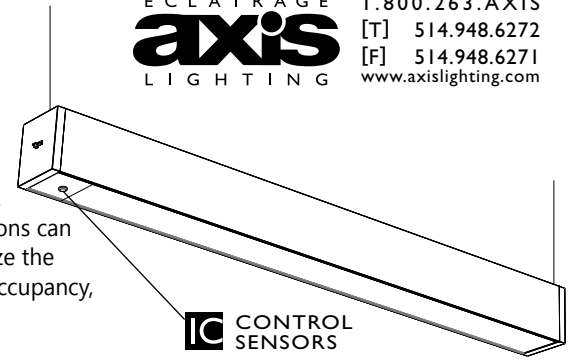


SENSORS	BRAND	Model	TYPE	CODE	COMPATIBLE DRIVER
Daylight Sensor (DS)	Lutron	EC-DIR-WH	Daylight	LD	EcoSystem
	Wattstopper	FD-301	Daylight	WD	Dimming 0-10V
	Philips	Luxsense	Daylight	PL	Dimming 0-10V
Occupancy Sensor (OS)	Wattstopper	FS-205	PIR Occupancy	WP1	Dimming or non-dimming
		FS-355 (Consult Factory)	PIR Occupancy	WP2	Dimming or non-dimming
Daylight and Occupancy Sensors (OS+DS)	Wattstopper Philips	Please consult factory			Dimming 0-10V

● PHOTOMETRIC DATA

Uplight 70%
640 lm/ft
 Downlight 30%
320 lm/ft



PHOTOMETRIC CURVE

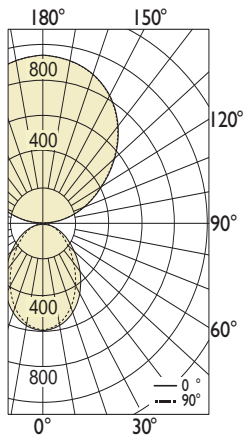

Luminaire Lumens: **640 lm/ft up**
320 lm/ft down

Input Watts: **8.61 w/ft**

Efficacy: **110 lm/w**

IES FILE: BBDILED-B2-640-320-35-SO.IES

CANDELA DISTRIBUTION

Vertical Angle	Horizontal Angles					Zonal Lumens
	0	22.5	45	67.5	90	
0	591	591	591	591	591	
5	584	587	584	587	589	14
15	552	553	546	541	539	39
25	491	486	473	459	454	55
35	407	399	379	358	350	60
45	312	304	282	263	256	55
55	219	213	195	180	175	44
65	135	132	120	112	109	30
75	65	64	59	56	55	16
85	13	13	14	14	13	4
90	0	0	0	0	0	
95	12	6	4	3	3	1
105	132	127	116	86	84	29
115	313	308	301	295	299	75
125	486	485	473	467	470	107
135	637	634	627	621	618	122
145	754	751	747	747	742	118
155	837	840	837	835	831	97
165	897	898	899	898	897	64
175	928	934	932	929	928	22
180	935	935	935	935	935	

COEFFICIENTS OF UTILIZATION (%)

Ceiling	80				70				50		
Wall	70	50	30	10	70	50	30	10	50	30	10
0	103	103	103	103	93	93	93	93	74	74	74
1	94	90	87	82	85	82	79	74	65	63	60
2	86	79	73	66	78	72	67	61	58	54	50
3	79	70	63	55	71	63	57	50	51	47	42
4	72	62	54	46	65	56	50	43	45	41	35
5	66	55	47	39	60	50	43	36	41	36	30
6	61	49	42	34	55	45	38	31	37	32	26
7	56	45	37	29	51	41	34	27	33	28	23
8	52	40	33	26	47	37	30	24	30	25	20
9	49	37	30	23	44	34	27	21	28	23	18
10	45	34	27	20	41	31	25	19	25	21	16

Based on floor reflectance of 20




LUMINANCE DATA (CD/M²)

Vertical Angle	Horizontal Angles		
	0	45	90
45	3595	3249	2949
55	3111	2770	2486
65	2602	2313	2101
75	2046	1857	1731
85	1215	1309	1215

i All IES files for other lamping are available for download at: www.axislighting.com

Job Name
Catalog Number

Recessed **P43**

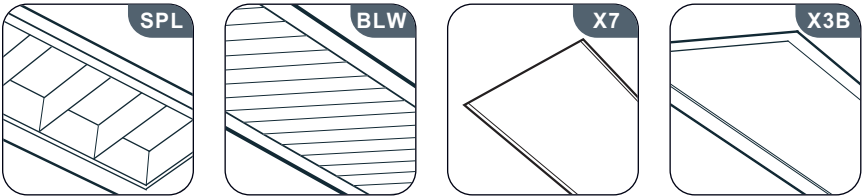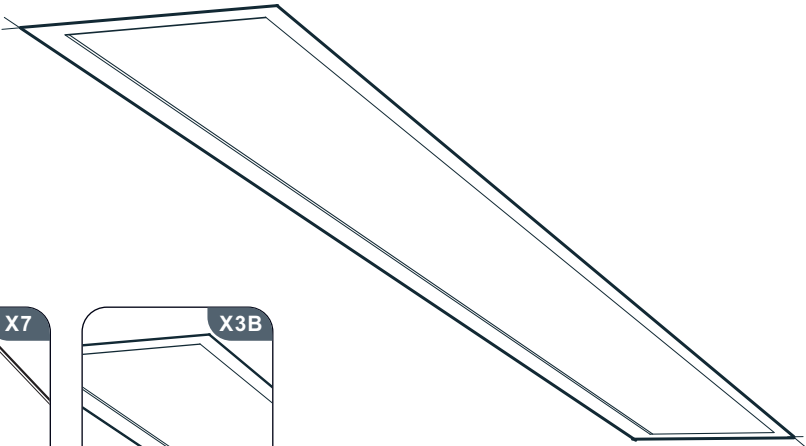

ordering - Standard System*

lamp series/rows	nominal length	shielding	color/finish*	distribution	circuiting	voltage	ceiling system	options
P43-1T5-04-TMW-D1-SC-277-X3B-DM								
1T8	02'	SAL satin acrylic extruded lens	TMW textured matte white	D1 direct	SC single circuit	120	X1* exposed T-bar	CR
2T8	03'					277		EML*
1T5	04'	OPL opal frost acrylic lens	YGW† gloss white		DC* dual circuit (in-line)	347	X3B hard ceiling (overhead mounting brackets)	EMH*
2T5	06'	PRA prismatic acrylic extruded lens	YPE pewter		*2 lamp only	UNV*		DM
1T5HO	08'		Y__ premium color				X7 hard ceiling (concealed flange)	RSE†
2T5HO	R_*	SPL silver parabolic louver	CC custom color					10THD†
	*row length	BLA blade louver-anodized					*standard	B__
		BLW blade louver white	*indicates color of flange -x1 and x3B ceiling systems only †standard					FH
								INTCW
								*consult factory for fixture lengths < 4' †T8 only

ordering - 1 lamp Staggered System*

lamp series/rows	nominal length	shielding	color/finish*	distribution	circuiting	voltage	ceiling system	options
P43-STG-								
1T8	08'	SAL satin acrylic extruded lens	TMW textured matte white	D1 direct	SC single circuit	120	X1* exposed T-bar	EML*
1T5	R_*					277		EMH*
1T5HO	*For rows of 6' or greater only	OPL opal frost acrylic lens	YGW† gloss white			347	X3B hard ceiling (overhead mounting brackets)	DM
		PRA prismatic acrylic extruded lens	YPE pewter			UNV*		RSE†
			Y__ premium color			*120-277	X7 hard ceiling (concealed flange)	10THD†
		SPL silver parabolic louver	CC custom color				*standard	B__
		BLA blade louver-anodized	*indicates color of flange -x1 and x3B ceiling systems only †standard					FH
		BLW blade louver white						INTCW
								*consult factory for fixture lengths < 4' †T8 only

*See drawings for row examples and lamping configurations.

P43 Recessed

Applications Classrooms, corridors, retail, healthcare, offices, hospitality, libraries.

Features A narrow 4" wide recessed lighting system in either a standard lamp configuration, or a staggered lamp configuration for single T8 or T5/HO lamp rows to provide continuous lighting without socket shadows along the entire row length. Standard lamping for 2T5 or T5HO lamp rows have offset lamps within modular rows to mitigate socket shadows. T8 lamps in standard configuration are end to end in modular rows and are not offset.

Construction The housing, available in 2-, 3-, 4-, 6- or 8-foot standard lengths, is made of die-formed 20-gauge steel. Louver material is semispecular, low iridescent aluminum. Snap-in prismatic lens is clear extruded acrylic. Snap-in satin acrylic lens is clear frost extruded acrylic with a matte finish for soft, even light transmission.

Finish The standard housing and flange color is gloss white (YGW) using polyester powder paint.

Electrical T8 fixtures have instant-start electronic ballasts with less than 20% THD. T5 and T5HO fixtures have programmed start electronic ballast with less than 10% THD. Fixtures are U.L. Damp labeled (non-emergency) and I.B.E.W. manufactured. Maximum ballast size available on non-staggered models: 2 3/8" width x 1 1/4" height. Maximum ballast size available on staggered models: 1 3/4" width x 1 1/4" height.

Mounting Fixture is to be recessed-mounted into exposed T-bar or hard ceiling applications.

Options **CR:** continuous-row installation (specify with non-staggered system only); **EML:** emergency battery (600-700 lumens); **EMH:** emergency battery (1100-1400 lumens); **DM:** dimming (consult factory); **RSE:** rapid-start electronic (T8 only); **10THD:** ballast with < 10% total harmonic distortion (T8 only); **B₁:** specific ballast, specify manufacturer and catalog number (consult factory); **FH:** fixture fusing (slow blow); **INTCW:** integrates with Sense™ System as whiteboard luminaire.

1 lamp Staggered System (STG)

Typical Row Examples - Lamp quantities and wattages are dependant on row size.

T5/T5HO - (3) 3' 21w or 39w lamps - Gear Trays: (1) 3' and 1 (6') Telescoping



T5/T5HO - (2) 3' 21w or 39w lamps and (2) 4' 28w or 54w lamps - Gear Trays: (1) 6' and 1 (8') Telescoping



T5/T5HO - (1) 3' 21w or 39w lamps and (5) 4' 28w or 54w lamps - Gear Trays: (1) 3', (1) 4', (1) 8' & (1) 8' Telescoping



T8 - (3) 3' 25w lamp - Gear Tray: (1) 8' individual



T8 - (3) 3' 25w and (1) 32w lamps - Gear Trays (1) 3', (1) 4' and (1) 6', Telescoping



T8 - (2) 3' 25w lamps and (4) 32w lamps - Gear Trays (2) 8' and (1) 6' Telescoping




Standard System

Typical Row Examples


2T8 lamp rows




2T5 or 2T5HO lamp rows



2T5 or 2T5HO lamp rows



Factory supplied submittal drawing will be provided. Lamps are not supplied.

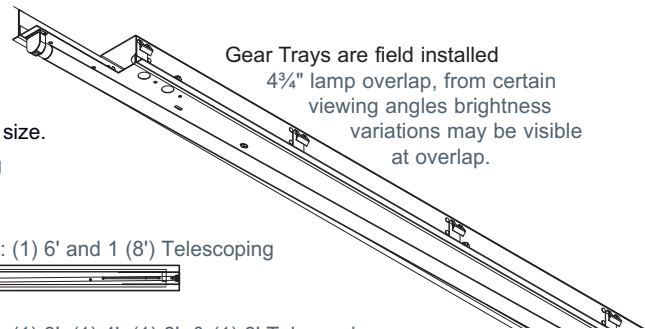


Prudential reserves the right to change design specifications or materials without notice.

photometric data

P-43-1T5-04'-SPL-TMW-D1

Report # LLI030708C D=100.0%
Spacing Criteria: Along 1.3; Across 1.5
Lamp Lumens: 2900 Input Watts: 33.82

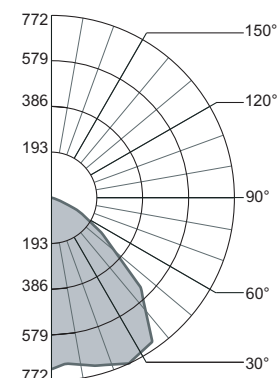

Candlepower Summary

Vertical Angle	Horizontal Angle				
	0°	22.5°	45°	67.5°	90°
0	724	724	724	724	724
5	763	763	740	712	703
15	732	742	746	737	734
25	671	695	731	759	772
35	592	633	698	732	743
45	492	547	595	555	534
55	355	413	366	280	261
65	182	198	138	123	124
75	32	31	31	27	27
85	9	8	7	7	7
90	0	0	0	0	0

Zonal Lumen Summary

Zone	% Lamp	% Luminaire
0-90	68.2	100.00
90-180	00.0	0.00

Efficiency = 68.2%


Luminance Summary (cd/m²)

Angle	0°	45°	90°
45	7195	8701	7809
55	6400	6598	4705
65	4453	3376	3034
75	1278	1238	1079
85	1068	830	830

Coefficients of Utilization (%)


Floor	effective floor cavity reflectance = .20				
	80	70	50	30	10
Ceiling	70	50	30	10	50
Wall	70	50	30	10	50
RCR 0	81	81	81	81	79
1	74	71	68	66	73
2	68	62	57	53	66
3	61	54	49	44	60
4	56	48	41	37	54
5	51	42	36	31	50
6	47	37	31	27	46
7	43	34	27	23	42
8	40	30	24	20	39
9	37	28	22	18	36
10	35	25	20	16	34

Adjoining Detail

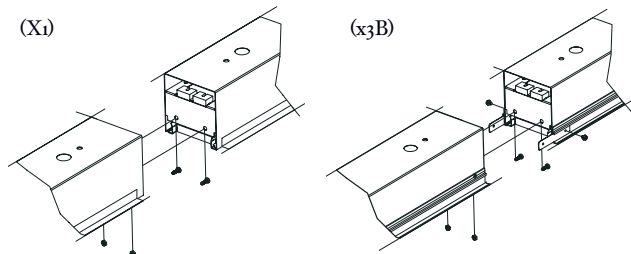


installation

Mounting Locations

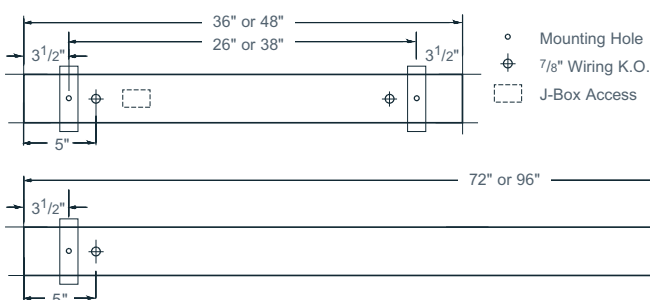


Ceiling Systems

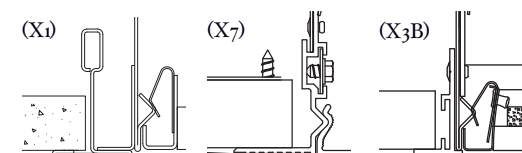

Framing Dimensions X3B & X7
Add 1/2\"/>

Prudential reserves the right to change design specifications or materials without notice.

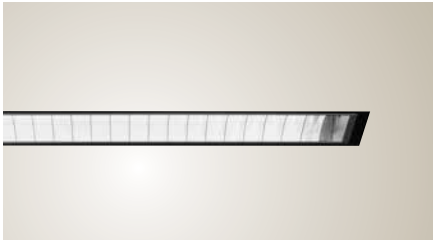

Lightline® Recessed
Symmetric Louver
Direct T5

Type:

Project:


SPECIFICATIONS

Recessed Mount

LSR9

LAMPING OPTIONS


□ LSR9 - 1 2'




2'



□ LSR9 - 1 4'



4'



SPECIFICATIONS

Construction

Housing is formed, pre-finished steel. Four-stage, iron-phosphate pretreatment ensures superior paint adhesion and rust resistance. Painted parts are finished with low-gloss baked enamel.

Reflectors

Pre-finished white reflector system.

Shielding

Arc-shaped, parabolic low-iridescent semi-specular aluminum louver.

Electrical

Specify 120V, 277V, or 347V. For special circuits, consult factory. UL and C-UL listed (non-IC).

Luminaire Size

Nominal 2 1/2" aperture. 2' and 4' lengths available.

CATALOG NUMBER

LSR9-G-1-28T5-LDL-U4-277-OSDIM-LP841-C200-FLNGW

Examples: LSR9 G 1 28T5 LDL U4 120 GEB10 L/LP C201 — LSR9 G 1 14T5 LDL U2 277 GEB10 LP835 C201

Luminaire	Ceiling Type	# of Lamps in Cross Section	Lamp Type	Baffle	Luminaire Row Length	Voltage	Ballast Type
LSR9	G Lay in grid	1	14T5 2' 14W T5 28T5 4' 28W T5	LDL Low-iridescent louver	U2 2' U4 4'	120 277 347	GEB10 <10% THD Electronic DMHL3D ^{1,2} Lutron Hi-Lume dim ADZT ^{1,2} Advance Mark 7 0-10V dim OSDIM ¹ Osram 0-10V dim <i>Reference Ballast Wizard on website or consult factory for other options.</i>

Emergency Type	Lamp Color	Finish	Options
EL ^{1,2} Emergency battery pack	L/LP No lamp LP830 3000K 80+ CRI LP835 3500K 80+ CRI LP841 4100K 80+ CRI Available with 28T5 only: LP830P 3000K 80+ CRI Premier LP835P 3500K 80+ CRI Premier LP841P 4100K 80+ CRI Premier <i>Reference Lamp Chart on website or consult factory for other options.</i>	C200 White (low gloss) C201 Black (low gloss)	CP Chicago plenum FLNGW Flange kit (dry wall only) white FLNGB Flange kit (dry wall only) black GLR Fusing (fast blow) GMF Fusing (slow blow) NYC New York City code

Notes:

- 1 Not available in 347V
- 2 Only available with 28T5

2246 5th Street, Berkeley, CA 94710 • Tel: 510.845.2760 • Fax: 510.845.2776 • Email: techsupport@peerlesslighting.com • PeerlessLighting.com

Client: _____

Project name: _____


Order #: _____

Type: _____ Qty: _____

FEATURES AND BENEFITS **LOID-24V-48-40K-NO-ASL**

Physical :

- Aluminum optical chamber housing
- Anodized aluminum flush trim
- Polymer recycled PVC blackout housing
- Available in 1', 2', 3' or 4' sections
- Die cast aluminum end caps
- Stainless steel hardware
- Frosted glass lens
- IP68 rated for up to 1' (30cm), not suitable for permanent immersion applications
- IK10 rated
- 1000kg max load, walk over only

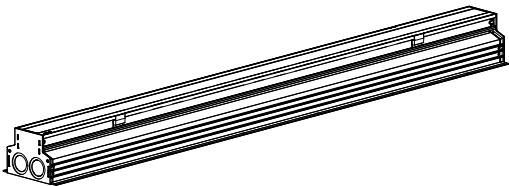


Performance :

- Lumen maintenance 80,000 hrs [L70 @ 25°C]
- Lumen maintenance 60,000 hrs [L70 @ 50°C]
- Resolution per foot or per fixture
- Operating temperatures: -40° C to 50° C [-40F to 122F]

Electrical :

- 24V DC luminaire, see Power and Control box options on page 7
- Power and data in 1 cable (#16-5)
- IP68 push-lock connectors
- 6W/ft
- Dimming options: 0-10 volt, DMX, DALI, Lumentalk, or Lutron® EcoSystem® enabled

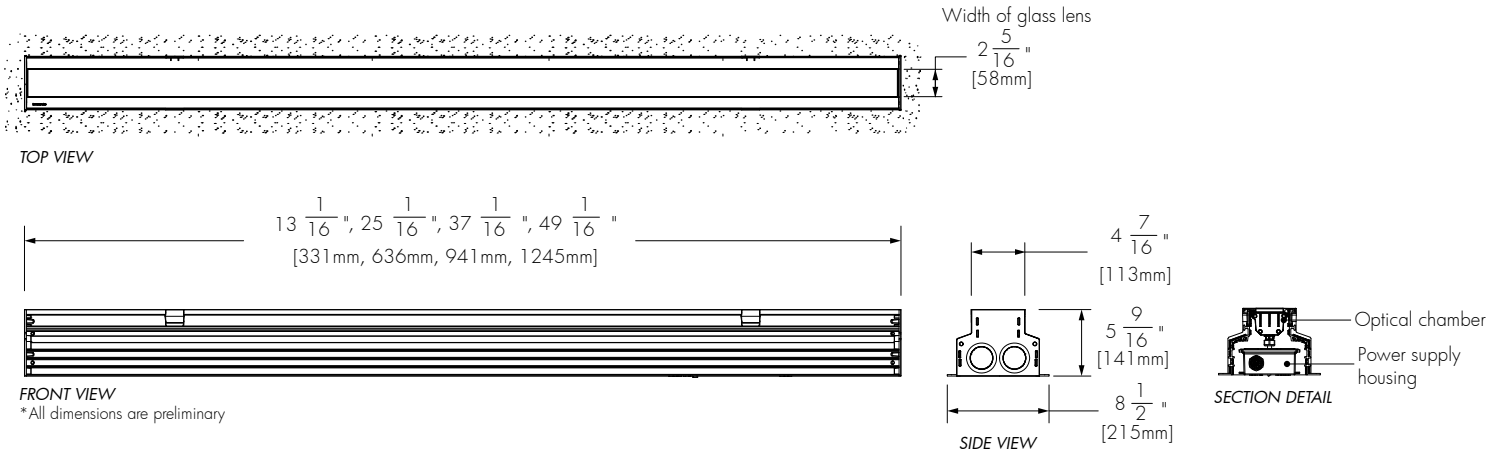

5 year warranty

ACCESSORIES

Order separately, refer to each item's specification sheet for ordering information

Control Systems:

- ITO2** Lumentouch is a wall mount DMX 512 controller keypad.
- LCU** Lumencue is a USB / mini SD DMX 512 controller.
- LID** LumenID is a diagnostic and addressing DMX 512 controller.
It must be specified on all DMX applications.
Refer to LID specification sheet for details.
- LTN** Lumentone is a simple pre-programmed DMX 512 controller with a push button rotary dial and live feedback.

Control Boxes:

- CBX** DMX/RDM control box.
Up to six power and data outputs to fixtures or fixture runs.
Ethernet enabled option.
Refer to CBX specification sheet for details.

Cables **(required)**:

Leader Cable for Lumenfacade Inground; 10', 25' or 50' [3m, 7.6m or 15.2m] standard lengths
Jumper Cable for Lumenfacade Inground; 2', 4' or 10' [0.6m, 1.2m or 3m] standard lengths


Inground Junction Box (optional):

Lumenfacade Inground IP68 sealed junction box starter kit - **LOI-JBOX** order code.
*Use for stand alone fixtures and/or first of run fixtures

TYPICAL WIRING DIAGRAMS


INGROUND
DIRECT VIEW
WHITE & STATIC COLORS

Typical Installation with Leader Cable

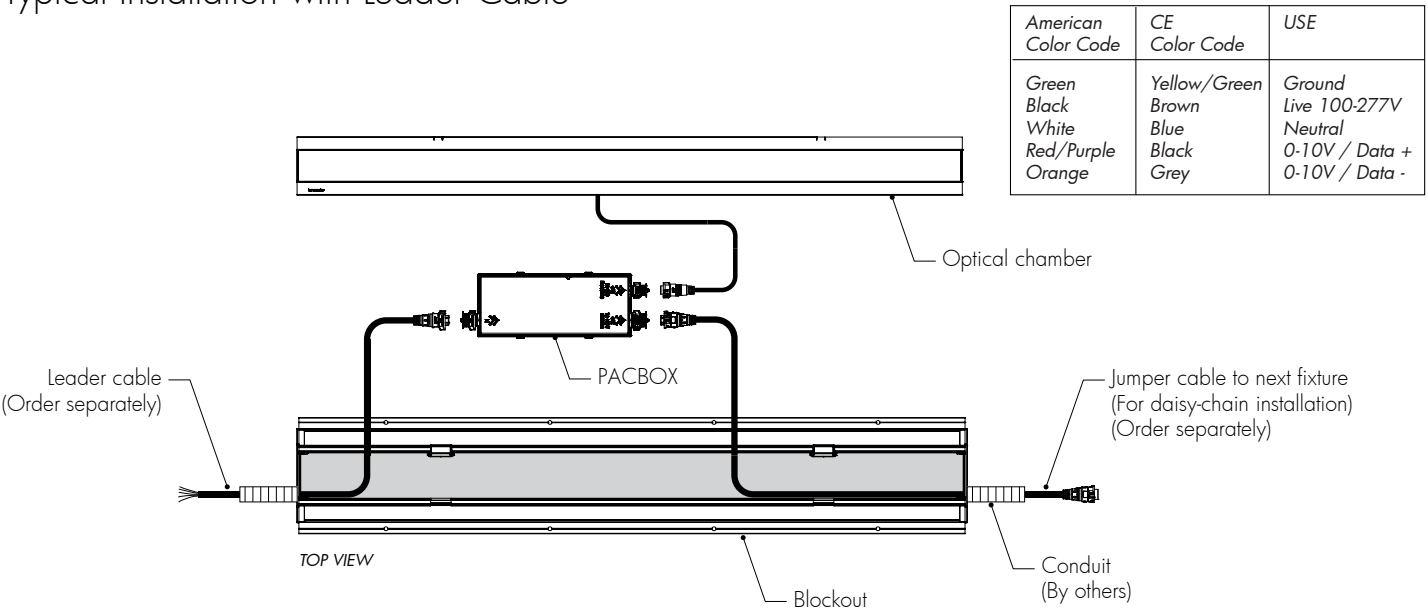


Typical Installation with IP68 LOI-JBOX Accessory

Cannot be used with 1ft LOI fixture

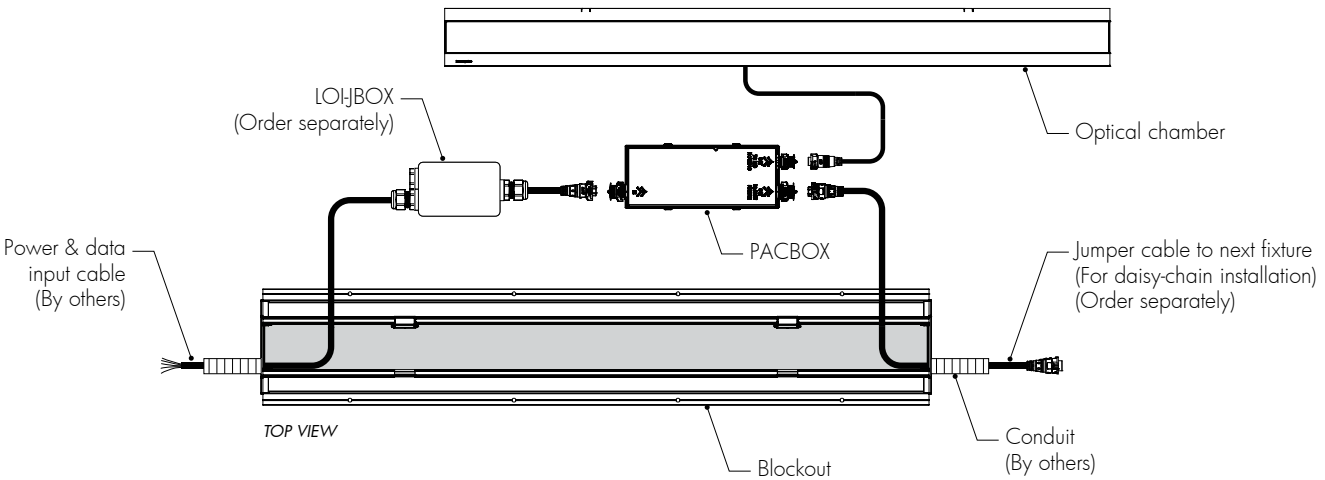


Non-Dimming or Lumentalk Dimming Version

1% minimum dimming value with Lumentalk dimming

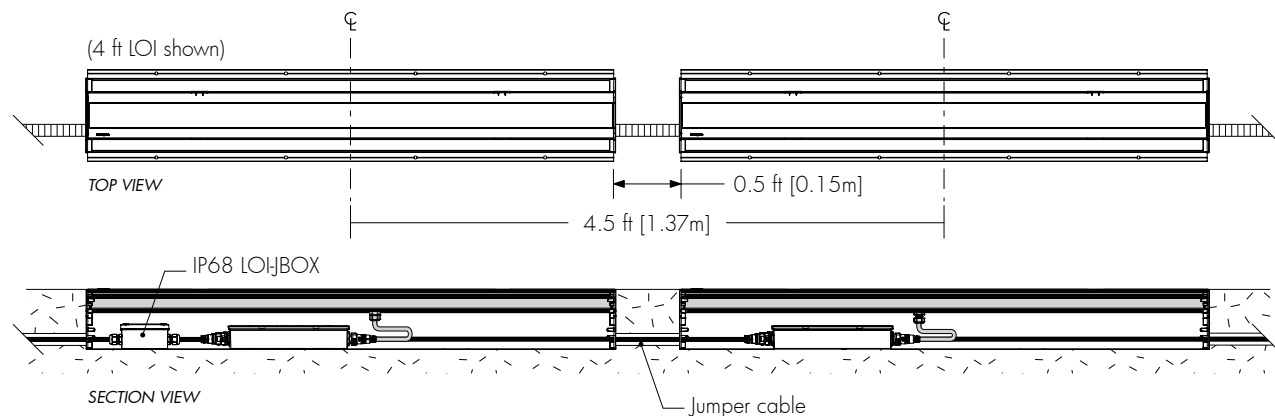

IP68 LOI-JBOX Accessory - Wiring Detail

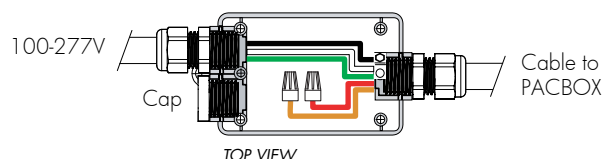


Jumper Cable Length

Estimate the center to center distance from one LOI to the following, and order the next longest jumper cable available.


Ex: 10 ft (3m) jumper cable needed for the example shown.

Dimming Version (0-10V, DALI, EcoSystem®)

10% minimum dimming value for 0-10V, 1% minimum dimming value for DALI, EcoSystem®

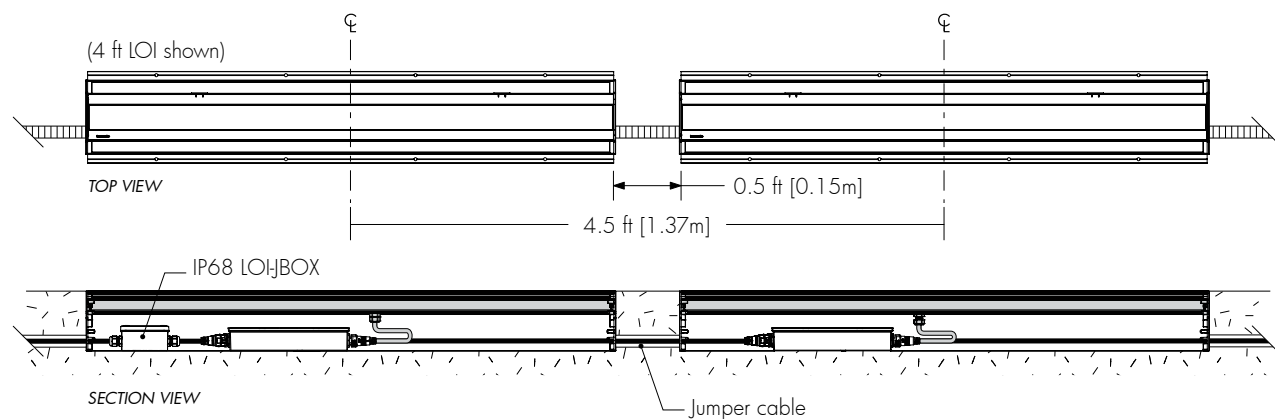

IP68 LOI-JBOX Accessory - Wiring Detail

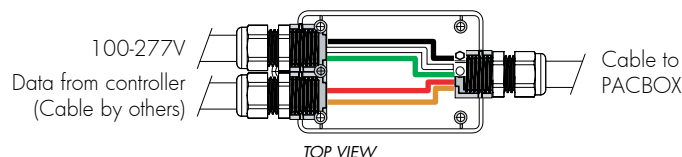


Jumper Cable Length

Estimate the center to center distance from one LOI to the following, and order the next longest jumper cable available.

Ex: 10 ft (3m) jumper cable needed for the example shown.

Star Layout (DMX Dimming)

1% minimum dimming value

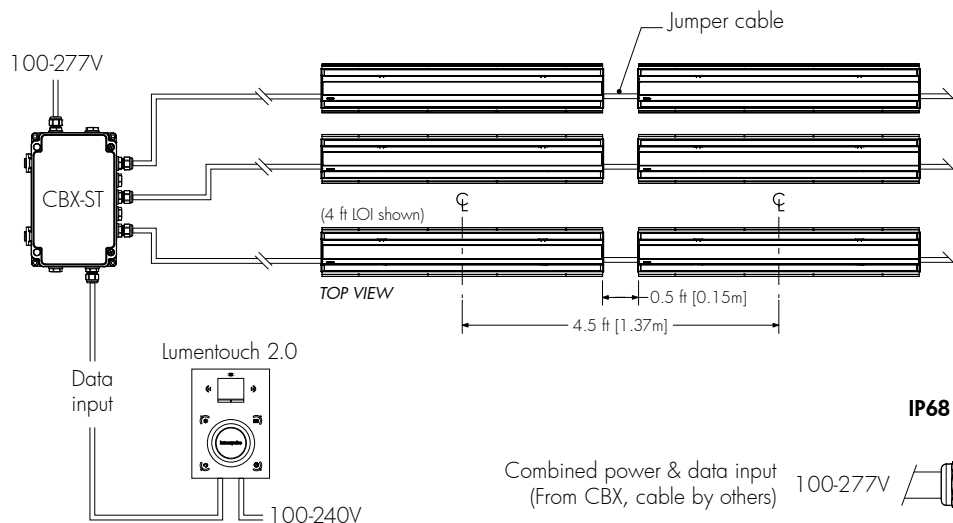


Jumper Cable Length

Estimate the center to center distance from one LOI to the following, and order the next longest jumper cable available.


Ex: 10 ft (3m) jumper cable needed for the example shown.

IP68 LOI-JBOX Accessory - Wiring Detail

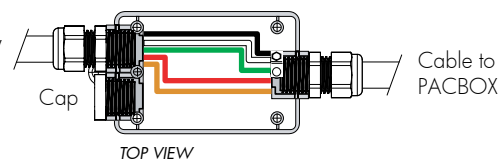

Daisy Chain Layout (DMX Dimming)

1% minimum dimming value

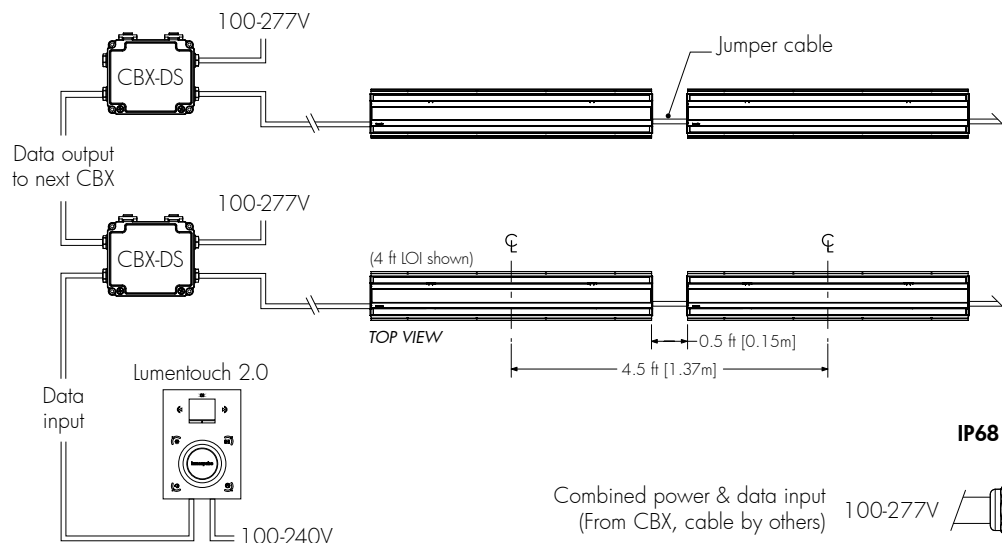


Jumper Cable Length

Estimate the center to center distance from one LOI to the following, and order the next longest jumper cable available.

Ex: 10 ft (3m) jumper cable needed for the example shown.

IP68 LOI-JBOX Accessory - Wiring Detail

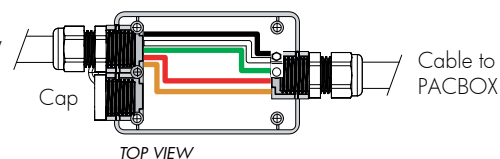

HOW TO ORDER

1	2	3	4	5	6
Housing	Voltage	Length	Colors and color temperatures	Control	Option
1	2	3	4	5	6
Housing: LOID - Lumenfacade™ Inground Direct View, 6W/ft			Control: NO - No Dimming LT - Lumentalk Dimming (1% minimum dimming value) DIM - 0-10V Dimming (10% minimum dimming value) DMX 1FT - DMX Dimming, resolution per foot (1% minimum dimming value) DMX 1FX - DMX Dimming, resolution per fixture (1% minimum dimming value) DALI - DALI Dimming (1% minimum dimming value) ES - Lutron® EcoSystem® Enabled Dimming (1% minimum dimming value)		
Voltage: 24V DC fixture. One PACBOX required per fixture, see page 7 to complete order code with input voltage.			Option: ASL - Anti-slip lens		
Length: 12 - 13 1/16 inches (331mm) 24 - 25 1/16 inches (636mm) 36 - 37 1/16 inches (941mm) 48 - 49 1/16 inches (1245mm)					
Colors and Color temperatures: 27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K RD - Red (8-10 weeks lead time) GR - Green (8-10 weeks lead time) BL - Blue (8-10 weeks lead time)					

HOW TO ORDER

INGROUND POWER AND CONTROL BOX (One PACBOX required per fixture)


PACBOX - WATTAGE		24V	
Housing	Input Voltage	Output Voltage	Control
1	2	3	4
1			4
Housing: The required PACBOX wattage varies with fixture selection. The correct PACBOX model will be provided based on fixture configuration.		Control: (fixture and PACBOX control option must be the same) NO - No Dimming LT - Lumentalk Dimming DIM - 0-10V Dimming DMX - DMX Dimming DALI - DALI Dimming ES - Lutron® EcoSystem® Enabled Dimming	
2	Input Voltage: 100 - 100 volts 220 - 220 volts 120 - 120 volts 240 - 240 volts 208 - 208 volts 277 - 277 volts		
3	Output Voltage: 24V - 24 volts DC		

PRE-INSTALLATION BLOCKOUT (One LOI-RBO required per fixture)

LOI-RBO		GRD	
Housing	Length	Installation Type	
1	2	3	
1		3	
Housing: LOI-RBO - Lumenfacade™ Inground Blockout		Installation Type: GRD - Ground Recessed	
2	Length: 12 - 13 1/16 inches (331mm) 24 - 25 1/16 inches (636mm) 36 - 37 1/16 inches (941mm) 48 - 49 1/16 inches (1245mm)		

LumiSheet

LED Light Panel


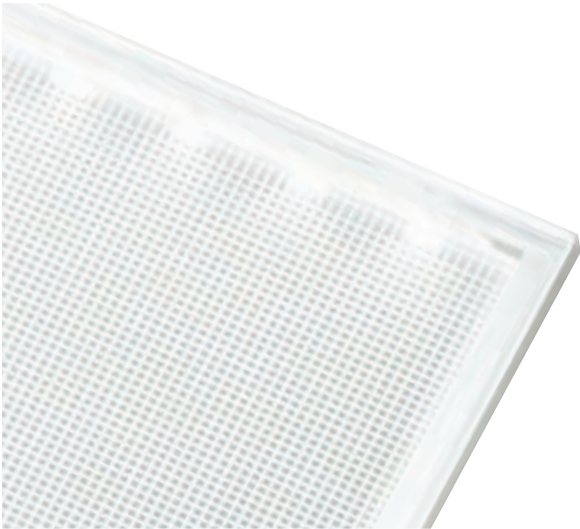


FEATURES & BENEFITS

- AVAILABLE IN CUSTOM SIZES & SHAPES
- CAN BE USED IN "FRAMELESS" DESIGNS
- 3D V-CUTTING TECHNOLOGY
- HIGH BRIGHTNESS (2,000 - 10,000 LUX)
- PATENTED HEAT SINK TECHNOLOGY TO MAXIMIZE LED LIFESPAN (70,000 HOURS)
- LOW POWER CONSUMPTION (70% LESS THAN FLUORESCENT)
- ENERGY SAVING AND MAINTENANCE FREE
- SUPERIOR CONSISTENT LIGHT QUALITY
- ADVANCED 3-YEAR WARRANTY

The **LumiSheet** is designed to emit a bright, even output of light across the entire surface of the panel. Unlike traditional light panels, which have the light source mounted on the exterior of the LGP (Light Guide Plate), LumiSheet integrates high brightness LEDs and heat sink into our exclusive 3D V-cutting LGP which makes it possible to produce "frameless", rectangular or special shaped LED light panels for various application needs.

PROFILE OF LUMISHEET

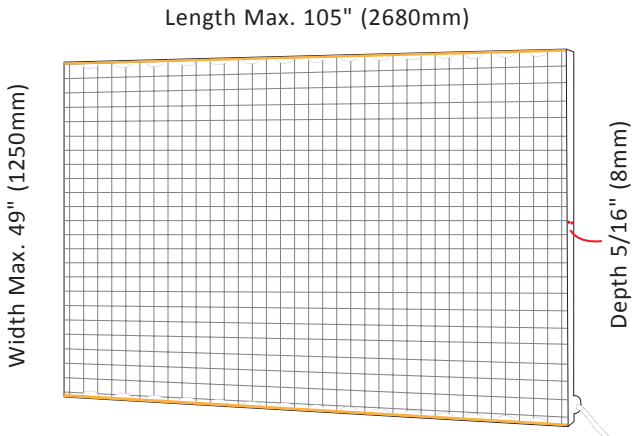
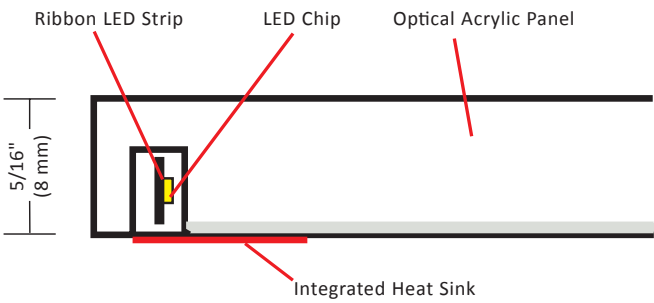


Power lead:
The power cord can be located around the perimeter of the panel as required, subject to the configuration of the LEDs, or the back of the panel.


Store Applications



LED Light Location

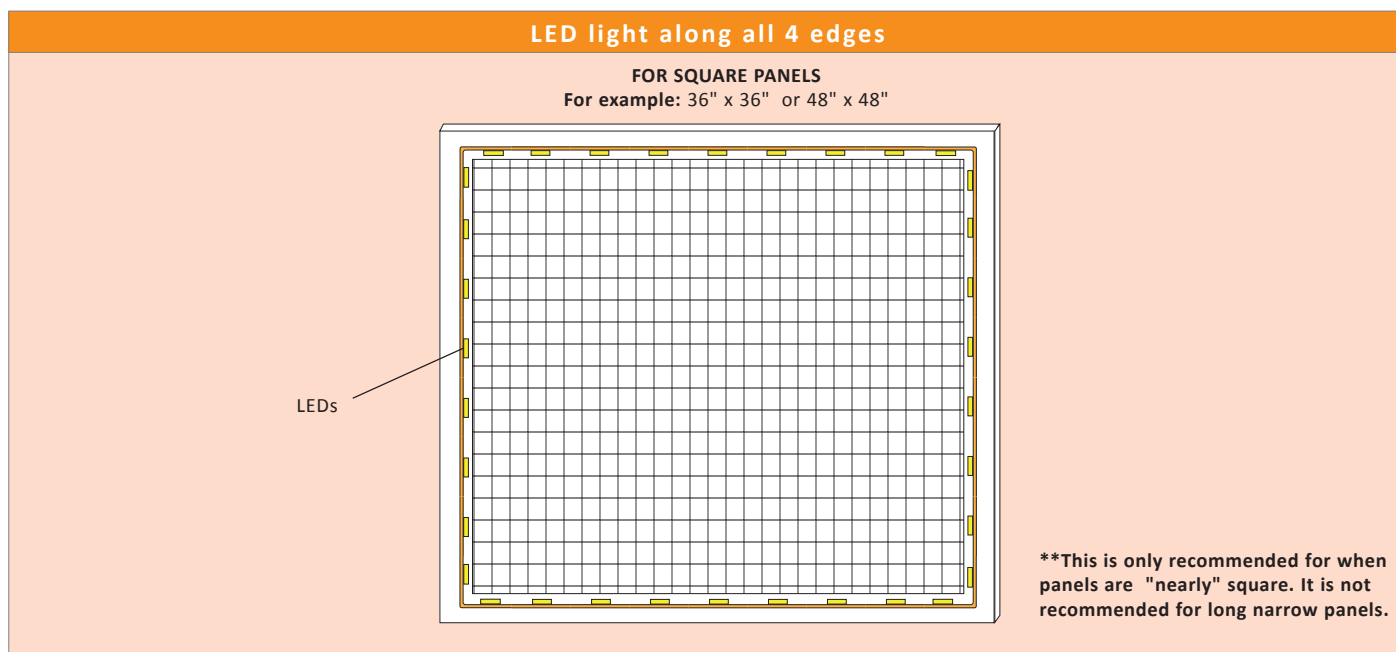
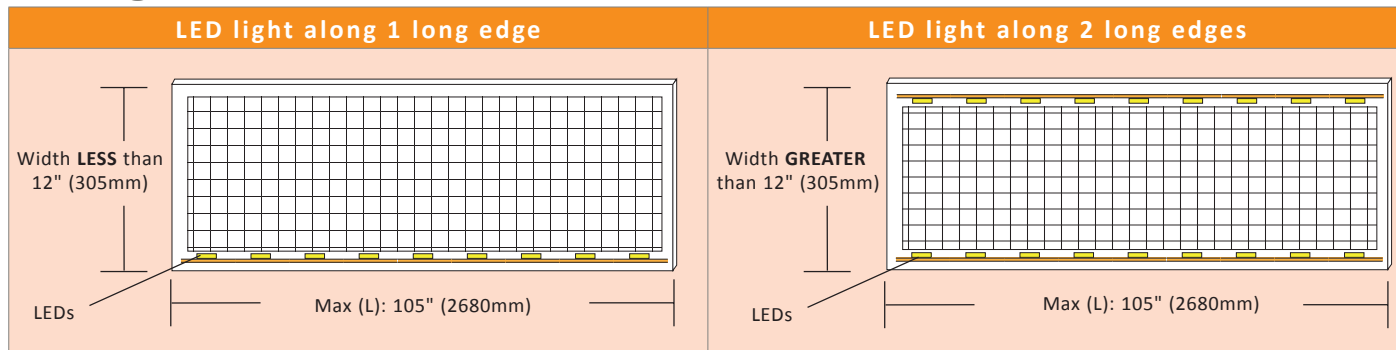


Illuminated Face Options

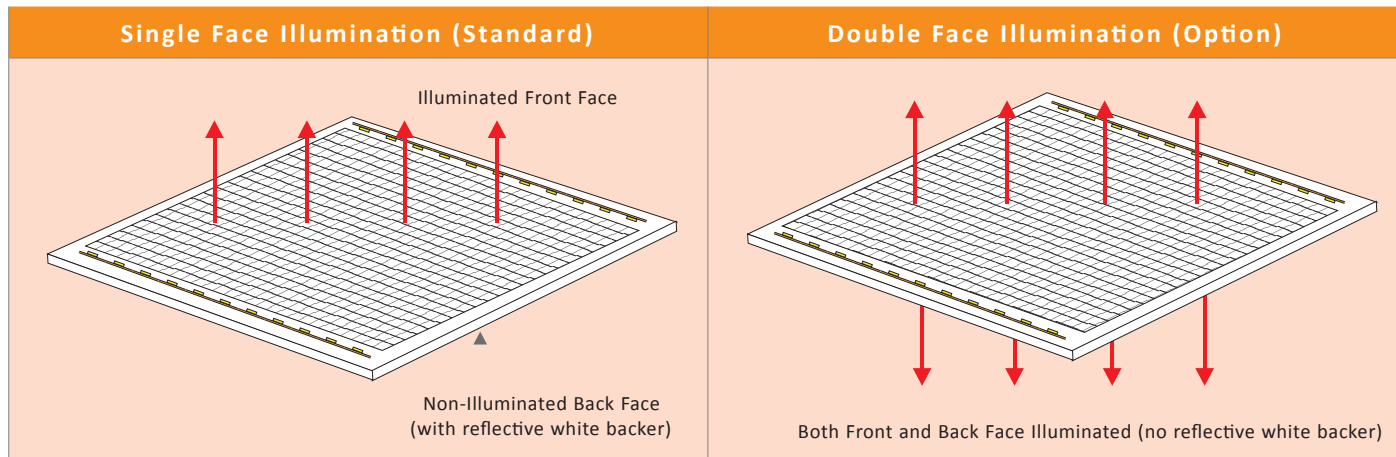


Typical Surface Brightness Measure

24" x 48" LumiSheet with high output 5300K LEDs lit along 2 long edges (40W)

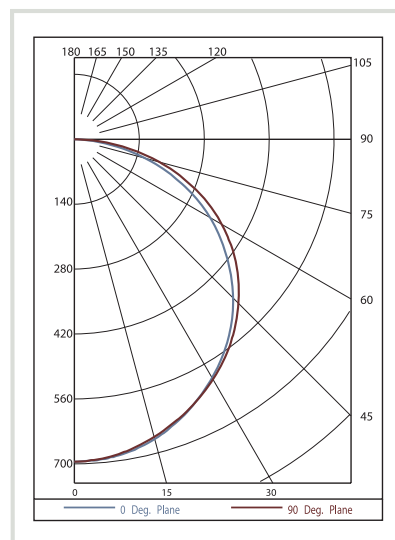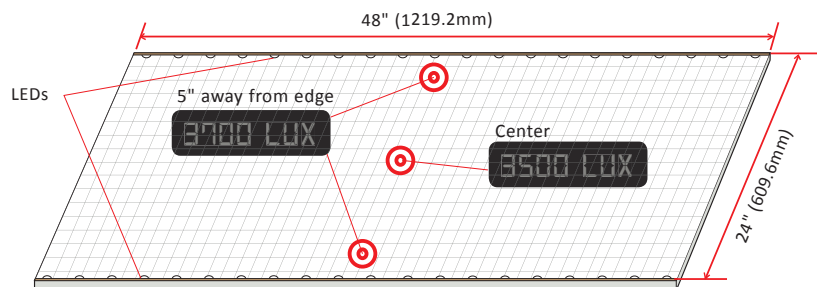


12" x 12" panel with regular 5300K LED lit along 2 edges (8W)

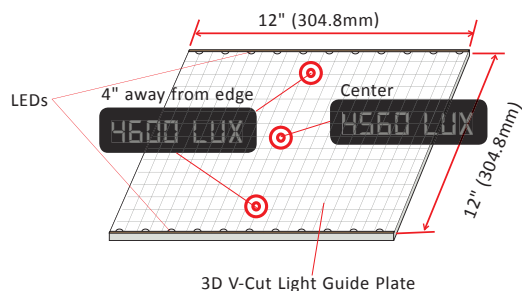

3D V-Cut Light Guide Plate

48" x 96" LumiSheet with high output 5300K LEDs lit along 2 long edges (80W)

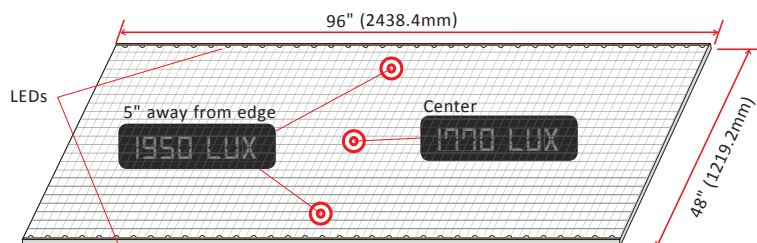

*Brightness readings are for reference only. Actual reading may differ for different LEDs, LGPs or even different meters.

LumiSheet (Specifications by Size)

Size (inch)	Size (mm)	LED Strip	*Average Surface Brightness (Lux)	Power Consumption (W)
6 x 6	150 x 150	1 side	5,000 (DL)	2.0
12 x 12	300 x 300	1 side	3,500 (DL)	4.0
24 x 24	600 x 600	2 sides	2,800 (DL)	15.0
36 x 36	900 x 900	2 sides	2,000 (DL)	23.0
48 x 48	1200 x 1200	2 sides	1,800 (HO)	40.0
48 x 96	1200 x 2400	2 sides	1,800 (HO)	80.0
Ø 6	Ø 152	all around	17,000 (DL)	5.8
Ø 12	Ø 300	all around	11,000 (DL)	11.2
Ø 24	Ø 600	all around	4,500 (DL)	24.0
Ø 36	Ø 900	all around	3,000 (DL)	36.0
Ø 48	Ø 1200	all around	2,200 (DL)	48.0


*Brightness data was measured from Jan. to Aug., 2009. "DL" denotes regular LEDs. "HO" denotes high output LEDs

Specifications

LumiSheet - LED Light Panel			
Electrical			
Input Voltage	12 Volt DC		
Power Consumption	4.0 Watts/ft (Standard)	5.0 Watts/ft (High Output)	
Wire Size	20 AWG 2 wire		
Wiring	Each panel must have direct connection to power supply. Do not wire panels in series		
Connector	2.1/5.5mm barrel plug. Standard 5' (1500mm), Optional 10' (3000mm)		
Certification	UL / cUL (E346146, E325925)		
Physical			
Color Temperature	Warm White approx. 3000K	Neutral White approx. 4100K	Pure/Cool White approx. 5300K
Mounting	Wall mounted with screws, Z-clips, U-channel, mirror clips or Mounting with Stand offs		
Operating Temperature	- 30 °C (- 22 °F) ~ + 40 °C (+ 104 °F)		
Environment	Dry location only (Standard)	Wet location (Custom)	
Minimum Size	2"W x 2"L x ⁵ / ₁₆ " D (50mm x 50mm x 8mm)		
Maximum Size	49"W x 105"L x ⁵ / ₁₆ "D (1250mm x 2680 mm x 8mm)		
Weight	1.95 lbs /sq. ft.	9.54 kg/sq. M	
Plug-In Power Adaptors			
Power Adaptors	12V DC, 1A, 12W, UL listed	12V DC, 5A, 60W UL class 2 listed	
Spider Cables	PL-2 : 2-way long spider cable	PL-4 : 4-way long spider cable	PS-2 / PS-4 / PS-6: 2/4/6-way short spider cables
Hardwire Power Adaptors			
Power Adaptors	PA-60W-HW 60W 12V Hardwire power adaptor Input 110V AC ~ 240V AC	PA-150W-HW 150W 12V Hardwire power adaptor Input 110V AC ~ 240V AC	
Dimming	Refer to dimming options		



Color Temperature:  Warm White 3000K  Neutral White 4100K  Pure/ Cool White 5300K

Max Size & Min Size




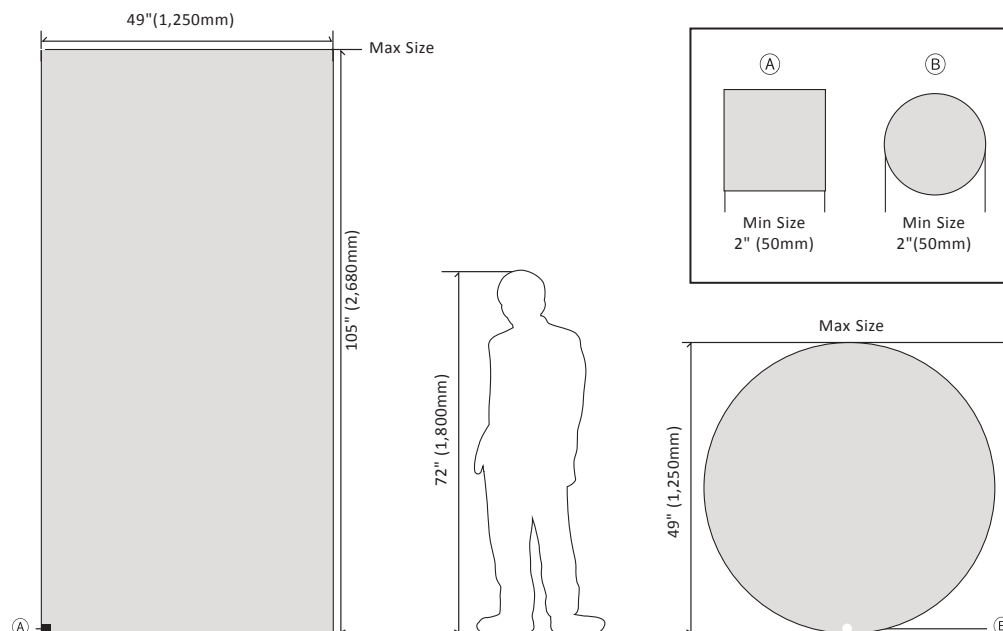


LumiSheet can be made from min. 2"(50mm) X 2"(50mm) to max. 49"(1,250mm) X 105" (2680mm)

Installation Tips

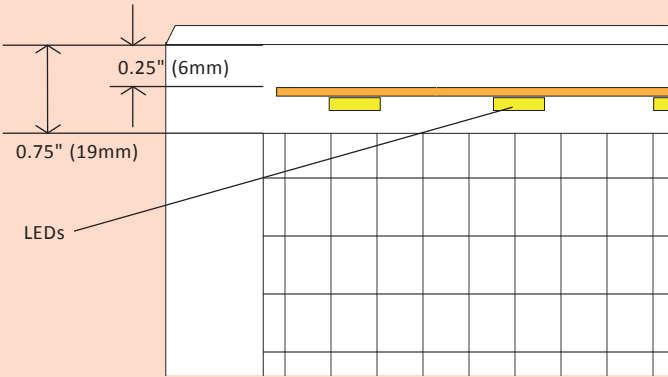
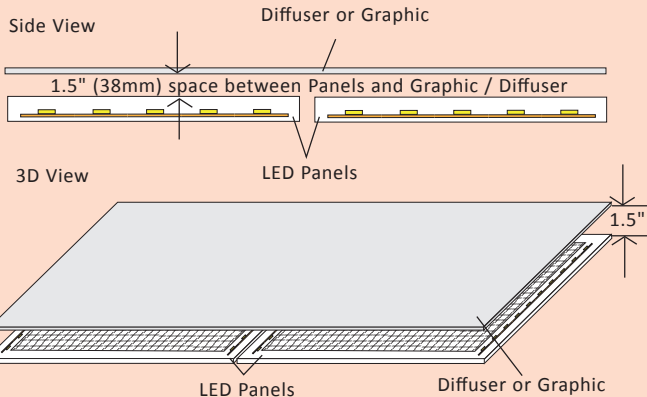
Single Panel	Multi-Panel
 <p>0.25" (6mm)</p> <p>0.75" (19mm)</p> <p>LEDs</p>	 <p>Side View</p> <p>Diffuser or Graphic</p> <p>1.5" (38mm) space between Panels and Graphic / Diffuser</p> <p>3D View</p> <p>LED Panels</p> <p>1.5"</p> <p>LED Panels</p> <p>Diffuser or Graphic</p>
<p>Typically LEDs are installed along a groove 0.25" away from the edge. To completely hide the LED light source (Hot Spots), recess the light panel into the fixture / frame by a minimum of 0.75" distance.</p>	<p>When placing panels side by side to form a longer panel, you may see a "hot line" where they meet. To avoid this you can use a diffuser (9mm thick or more) or leave a space (gap) of 1.5" or more between the light panel and front graphic etc.</p>

Surface Mounting

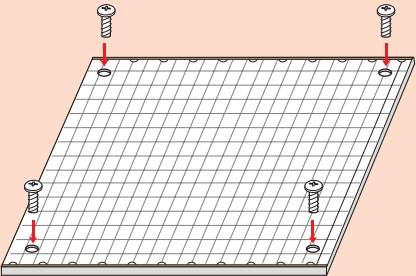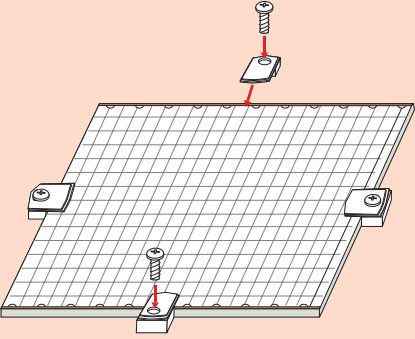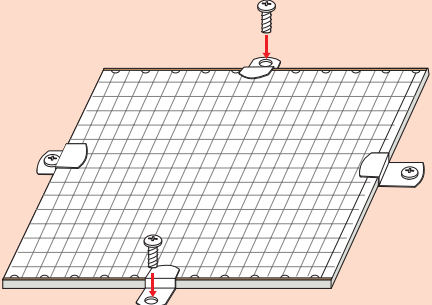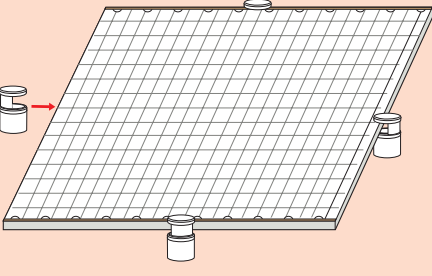Option 1	Option 2
	
<p>Screw mounting with pre-drilled holes</p>	<p>Mounting with mirror clips</p>
Option 3	Option 4
	
<p>Mounting with Z-clips</p>	<p>Mounting with Stand offs</p>



Typical Power Cord Exits

Standard 1

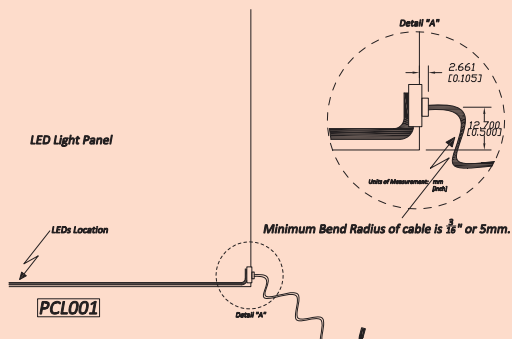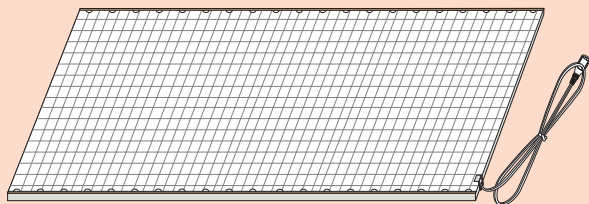



Power cord exits from short side (edge) corner (standard)

Standard 2

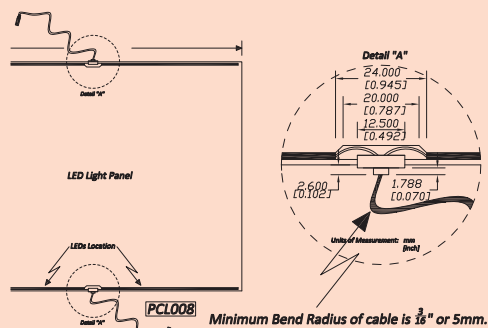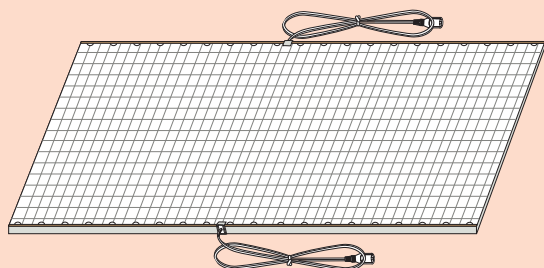



Power cord exits from the middle of each long side for Lumisheet longer than 6 ft

Option 1

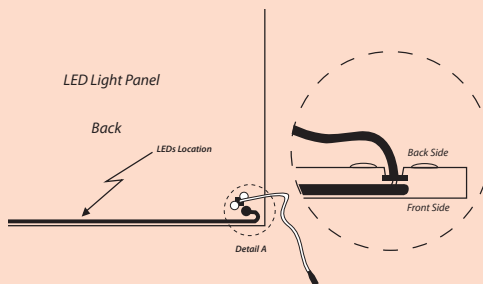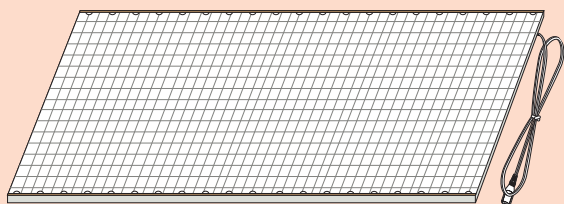

Power cord exits from the back side of Lumisheet

Option 2

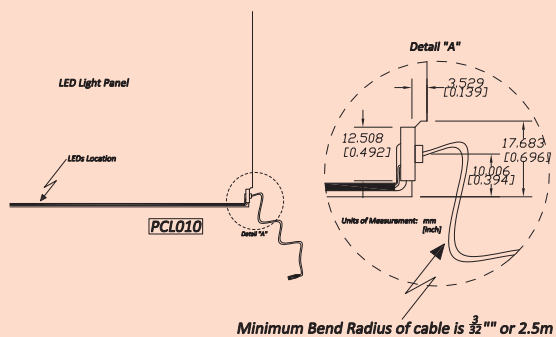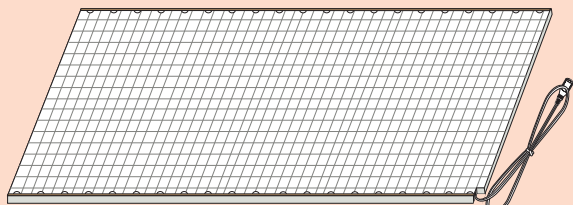

Recessed (notched) power cord exits

PHOTO



Dimming Options

DIMMING OPTION 1: INLINE PLUG AND PLAY DIMMING SOLUTION



SENSOR

DIMMER

REMOTE

DIMMER

- REMOTE CONTROL MAINTAINS LAST SETTING MEMORY
- 60W PLUG & PLAY IR DIMMER


ADVANTAGES:

- PLUG AND PLAY: NO EXTRA WIRING REQUIRED
- REMOTED CONTROL WITH ON/OFF FUNCTION


DISADVANTAGES:

- 10% UP/DOWN DIMMING
- CAN CONTROL ONLY UP TO 60W
- DIMMING SETUP IS NOT RETAINED IN MEMORY AFTER POWER OFF
- CAN NOT BE CONTROLLED BY HOUSEHOLD SLIDE/DIAL DIMMERS

Single Panel Wiring

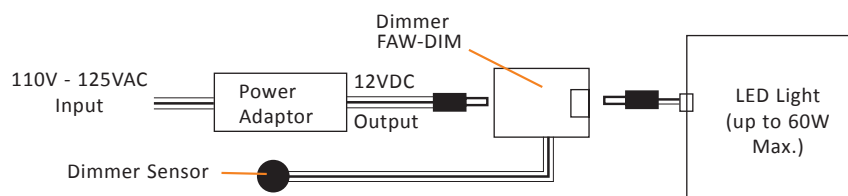

Multiple Panel Wiring

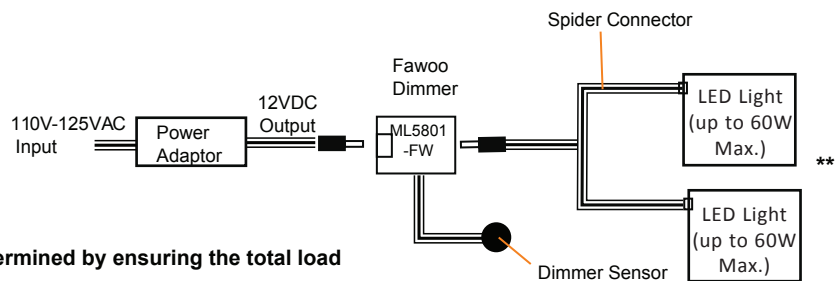
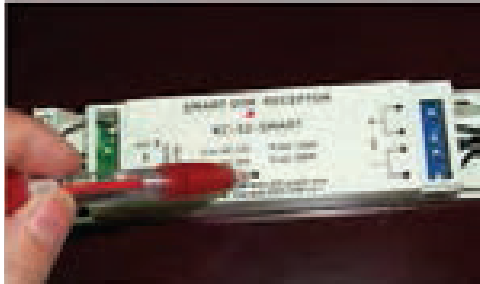
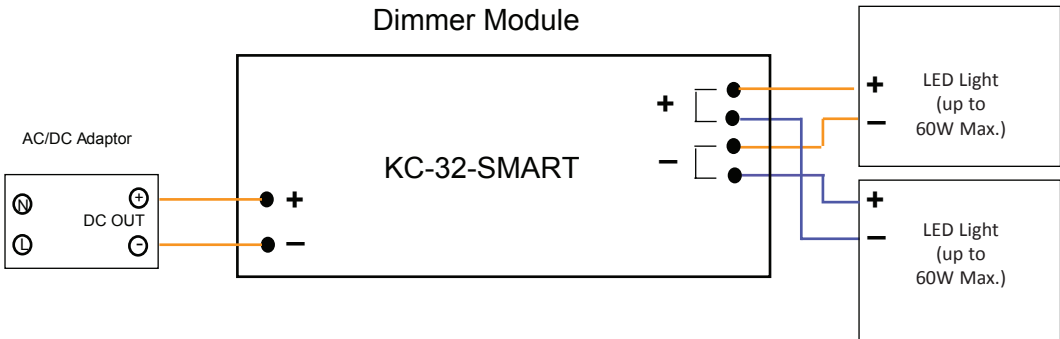
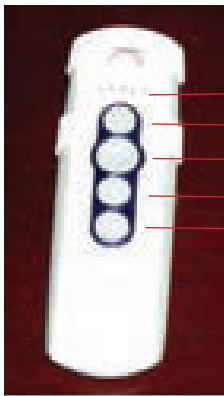


**** Maximum number of light panels is determined by ensuring the total load of all panels is less than 60 watts.**

NOTE: ALL POWER ON/OFF OPERATIONS MUST BE PERFORMED USING THE REMOTE CONTROL IN ORDER TO MAINTAIN LAST SETTING MEMORY. THE LAST SETPOINT WILL BE RETAINED FOR POWER-UP PROVIDED THE RE-CONNECTION OF THE 12VDC INPUT POWER. THE DIMMER MODULE RESETS ITSELF TO 100% OUTPUT.

Dimming Options

DIMMING OPTION 2: RADIO FREQUENCY (RF) REMOTE CONTROLLED DIMMING SOLUTION

<p>DIMMER</p> 	<p>KC-32-SMART DIMMER</p> <ul style="list-style-type: none"> 30 -10% BRIGHTNESS CONTROL. 256 LEVELS 12V DRIVEN, 2 CHANNEL OUTPUT, MAX 5A (60W) EACH CHANNEL MULTI GROUP CONTROL <div> <div> <p>ADVANTAGES:</p> <ul style="list-style-type: none"> EASY WIRING WITH REMOTE CONTROL PAD MAXIMUM 120W (2 CHANNEL TOTAL) DIMMING SETUP IS MEMORIZED AFTER POWER OFF </div> <div> <p>DISADVANTAGES:</p> <ul style="list-style-type: none"> CAN NOT BE CONTROLLED BY HOUSEHOLD DIMMERS </div> </div>
<p>REMOTE</p> 	<p>The remote control pad can be set to control up to 5 different Groups (CH-Channels) of dimming modules. There is a "CH" button on the remote control pad which is used to select the dimming group to be controlled and 5 LED identifies which indicates the current group (CH) selected.</p> <p>For example, there are 6 LED lights in a room, to all 6 lights at the same time, they should be in the same group (CH #1). But you can select 2 lights to be in CH#1, and the other 4 lights to be in CH#2, #3, #4, #5, respectively.</p> <p>In this case, you can operate (dim) the 2 lights in CH#1 independently of others. For example, dim the 2 lights in CH#1 to 50%, turn the light in CH#2 off while maintaining the rest all on at 100% with one remote control. The 2 lights in CH#1 have to be wired to 1 dimming module, and the other 4 lights have to be wired to 4 different dimming modules independently.</p>
<div>  <p>The diagram shows an AC/DC Adaptor connected to the DC OUT (+/-) terminals of the KC-32-SMART module. The module's output terminals (+/-) are connected to two LED Light units, each rated up to 60W Max.</p> </div>	
 <ul style="list-style-type: none"> GROUP (CH) INDICATOR CHANNEL SELECTION BUTTON ON / OFF SWITCH BRIGHTNESS (+) BUTTON BRIGHTNESS (-) BUTTON 	<h4>KDD-DIM-L01 REMOTE CONTROL PAD</h4> <p>The remote control pad has to be initially synchronized with the dimming modules to be controlled. Follow the steps below for synchronization:</p> <p>Step 1: Connect DC12V power supply to the input of KC-32-SMART dimming module, and connect the outputs of the dimming module to LED lights. The total wattage of each channel must be less than 60W.</p> <p>Step 2: Press the "CH" button on the remote control pad to select the group (CH#1 for example). The LED indicator on the remote control pad indicates which group is selected.</p> <p>Step 3: Use a pen or pencil to push and hold the recessed push button on the dimming module as shown below (Picture 2) while at the same time pressing the "B+" button on the remote control pad until the "RED" indicator light on the dimming module stops flashing.</p> <p>Step 4: Release the pen, and press "B-" on the remote control. If the LED lights connected dim down, it means the synchronization is completed successfully.</p> <p>Step 5: If you have more dimming modules in the same group, repeat step 1-4 above while keep the CH# unchanged.</p> <p>Step 6: If you have more groups in a system, change the "CH" number and repeat step 1-4 above.</p>

Dimming Options

DIMMING OPTION 4: DIMMING MODULE SOLUTION



SWITCH



DIMMER

Class 2

XITANIUM™ DIMMER


- 0 - 10V DIMMING CONTROL
- UL CLASS2
- MAXIMUM 60W AT 12VDC INPUT
- IP 66

ADVANTAGES:

- SMOOTH AND CONTINUOUS DIMMING BETWEEN 0% - 100% USING 0 - 10V WALL MOUNT SLIDE DIMMER

DISADVANTAGES:

- HARD WIRING REQUIRED
- MAY NOT BE SUITABLE FOR LARGE SCALE SYSTEMS (BECAUSE OF MASSIVE WIRING REQUIRED)

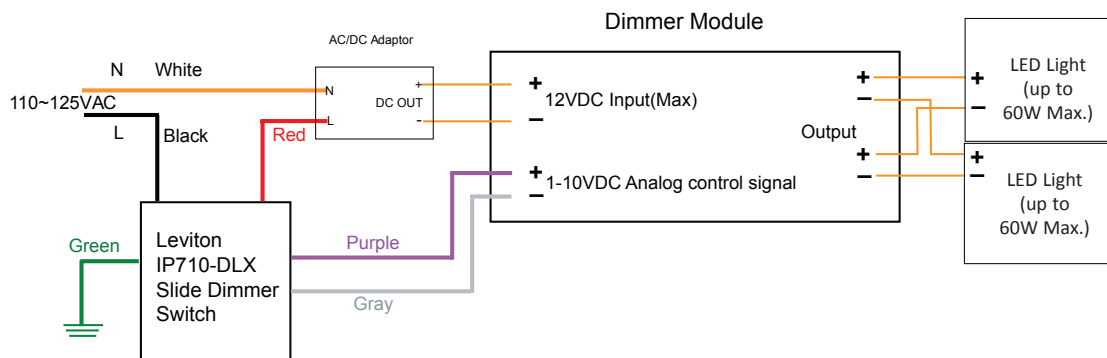

**The maximum number of dimmer modules in parallel is determined by the load rating of the dimmer switch and the maximum power output of the DC power supply.

**Control multiple panels/bars with one power supply and one slide/dial dimming module. The total power consumption (wattage) of the panels/bars to be controlled must be less than the wattage of the 12VDC power supply.


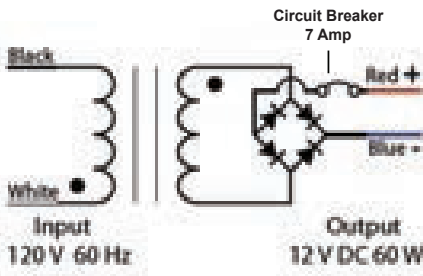
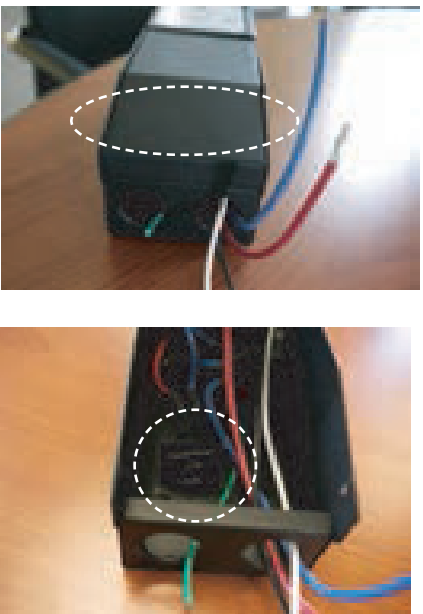
**This dimmer option is tested to work with the Leviton IP710-DLX slide switch. DLC does not guarantee that this dimmer module works with other dimming switches. It is the responsibility of the end user to test and ensure proper operation of any dimming switch that has been substituted for the unit specified.

**DLC accepts no responsibility for the dimmer and/or module performance if design changes are incorporated by the end user

**The Dimmer module will default to 100% output if the 0-10VDC Input control signal is removed or not connected


Dimming Options

DIMMING OPTION 6: DIMMABLE MAGNETIC TRANSFORMER SOLUTION

<div></div> <div>SWITCH<div>ETL LISTED US</div></div> <div>DIMMER</div> <div>Class 2</div>		<div>PA-60W(MAG) M60L12DC DIMMER</div> <div><div><ul style="list-style-type: none">60W/150W DIMMABLE MAGNETIC TRANSFORMER WITH DC 12V OUTPUTETL CERTIFIED, CLASS 2 (60W ONLY)COMPATIBLE WITH MOST LUTRON MAGNETIC LOW VOLTAGE WALL MOUNT DIMMER</div></div> <div><div><div>ADVANTAGES:<ul style="list-style-type: none">SIMPLIFIED WIRING, ESPECIALLY FOR LARGE SCALE SYSTEMS</div><div>DISADVANTAGES:<ul style="list-style-type: none">SIZE AND WEIGHT</div><div>ENCLOSURE:<ul style="list-style-type: none">ENCLOSURE TEMPERATURE WILL NOT EXCEED 70 °C @ 40 °C AMBIENT.WIRING COMPARTMENT HAS 2 KNOCKOUTS SIZED FOR 3/4 INCH SCREW CABLE CONNECTORS.THE REMOVABLE COVER FOR THE WIRING COMPARTMENT IS SECURED IN PLACE BY A SCREW.THE ENCLOSURE IS BLACK POWDER COATED.</div><div>WIRE TYPE:<ul style="list-style-type: none">INPUT LEADS ARE 20 AWG.OUTPUT LEADS ARE 14 AWG. LEAD INSULATION IS 105 °C.THE TRANSFORMER USES A CLASS B 130 °C INSULATION SYSTEM.</div></div><div><div>SPECIFICATION:</div><table><tr><td>Maximum Load</td><td>60W</td></tr><tr><td>Input Voltage</td><td>120V 60Hz</td></tr><tr><td>Output Voltage Full Load</td><td>11.5VDC</td></tr><tr><td>Input Current Full Load</td><td>540 mA</td></tr><tr><td>Open Circuit Volts</td><td>12.5 VDC</td></tr><tr><td>Output Current Full Load</td><td>4.8 A</td></tr><tr><td rowspan="3">Protections</td><td>Overload</td></tr><tr><td>Over Current</td></tr><tr><td>Short Current</td></tr><tr><td>Efficiency</td><td>89.20%</td></tr><tr><td>Coil Former</td><td>Double Section Bobbin</td></tr><tr><td>Thermal Class</td><td>B 130 °C</td></tr><tr><td>Leads Primary</td><td>PVC 600 V #20</td></tr><tr><td>Leads Secondary</td><td>PVC 300 V #14</td></tr><tr><td>Dimensions in inches</td><td>6.06" (L) x 2.59" (W) x 2.20" (D)</td></tr></table></div></div>					Maximum Load	60W	Input Voltage	120V 60Hz	Output Voltage Full Load	11.5VDC	Input Current Full Load	540 mA	Open Circuit Volts	12.5 VDC	Output Current Full Load	4.8 A	Protections	Overload	Over Current	Short Current	Efficiency	89.20%	Coil Former	Double Section Bobbin	Thermal Class	B 130 °C	Leads Primary	PVC 600 V #20	Leads Secondary	PVC 300 V #14	Dimensions in inches	6.06" (L) x 2.59" (W) x 2.20" (D)																																
Maximum Load	60W																																																																	
Input Voltage	120V 60Hz																																																																	
Output Voltage Full Load	11.5VDC																																																																	
Input Current Full Load	540 mA																																																																	
Open Circuit Volts	12.5 VDC																																																																	
Output Current Full Load	4.8 A																																																																	
Protections	Overload																																																																	
	Over Current																																																																	
	Short Current																																																																	
Efficiency	89.20%																																																																	
Coil Former	Double Section Bobbin																																																																	
Thermal Class	B 130 °C																																																																	
Leads Primary	PVC 600 V #20																																																																	
Leads Secondary	PVC 300 V #14																																																																	
Dimensions in inches	6.06" (L) x 2.59" (W) x 2.20" (D)																																																																	
<div></div>																																																																		
<div></div>		<div>How to reset circuit breaker</div> <div>In the event of a short circle, overload, or over current the circuit breaker located inside the transformer enclosure will be tripped in order to protect equipment. Please follow the steps below to reset circuit breaker:</div> <div>Step 1: Disconnect transformer from power. Step 2: Open transformer enclosure by lifting up he enclosure open. Step 3: Locate 20 amp circuit breaker shown below. Step 4: Reset by flipping switch on circuit breaker. Step 5: Close lid on the enclosure and connect back to power</div> <table><tr><td>Brand</td><td>Type</td><td>Dimmer</td><td>Control</td><td>Watts</td></tr><tr><td>Lutron Ariadni</td><td>AYLV-600P</td><td>Magnetic Low Voltage</td><td>Single Pole</td><td>450W</td></tr><tr><td>Lutron Ariadni</td><td>AYLV-603P</td><td>Magnetic Low Voltage</td><td>3-Way</td><td>450W</td></tr><tr><td>Lutron Nova</td><td>NTLV-600</td><td>Magnetic Low Voltage, Small Control</td><td>Single Pole</td><td>450W</td></tr><tr><td>Lutron Nova</td><td>NTLV-1000</td><td>Magnetic Low Voltage, Small Control</td><td>Single Pole</td><td>800W</td></tr><tr><td>Lutron Nova</td><td>NTLV-603P</td><td>Magnetic Low Voltage, Small Control</td><td>Single Pole/3-Way</td><td>450W</td></tr><tr><td>Lutron Nova</td><td>NTLV-1003P</td><td>Magnetic Low Voltage, Small Control</td><td>Single Pole/3-Way</td><td>800W</td></tr><tr><td>Lutron Nova</td><td>NLV-600</td><td>Magnetic Low Voltage, Small Control</td><td>Single Pole</td><td>450W</td></tr><tr><td>Lutron Nova</td><td>NLV-1000</td><td>Magnetic Low Voltage, Large Control</td><td>Single Pole</td><td>800W</td></tr><tr><td>Lutron Ceana</td><td>CNLV-603P</td><td>Magnetic Low Voltage</td><td>3-Way</td><td>450W</td></tr><tr><td>Lutron Diva</td><td>DVLV-103P</td><td>Magnetic Low Voltage</td><td>3-Way</td><td>800W</td></tr><tr><td>Lutron Diva</td><td>DVSLV-103P</td><td>Magnetic Low Voltage</td><td>3-Way</td><td>800W</td></tr></table>					Brand	Type	Dimmer	Control	Watts	Lutron Ariadni	AYLV-600P	Magnetic Low Voltage	Single Pole	450W	Lutron Ariadni	AYLV-603P	Magnetic Low Voltage	3-Way	450W	Lutron Nova	NTLV-600	Magnetic Low Voltage, Small Control	Single Pole	450W	Lutron Nova	NTLV-1000	Magnetic Low Voltage, Small Control	Single Pole	800W	Lutron Nova	NTLV-603P	Magnetic Low Voltage, Small Control	Single Pole/3-Way	450W	Lutron Nova	NTLV-1003P	Magnetic Low Voltage, Small Control	Single Pole/3-Way	800W	Lutron Nova	NLV-600	Magnetic Low Voltage, Small Control	Single Pole	450W	Lutron Nova	NLV-1000	Magnetic Low Voltage, Large Control	Single Pole	800W	Lutron Ceana	CNLV-603P	Magnetic Low Voltage	3-Way	450W	Lutron Diva	DVLV-103P	Magnetic Low Voltage	3-Way	800W	Lutron Diva	DVSLV-103P	Magnetic Low Voltage	3-Way	800W
Brand	Type	Dimmer	Control	Watts																																																														
Lutron Ariadni	AYLV-600P	Magnetic Low Voltage	Single Pole	450W																																																														
Lutron Ariadni	AYLV-603P	Magnetic Low Voltage	3-Way	450W																																																														
Lutron Nova	NTLV-600	Magnetic Low Voltage, Small Control	Single Pole	450W																																																														
Lutron Nova	NTLV-1000	Magnetic Low Voltage, Small Control	Single Pole	800W																																																														
Lutron Nova	NTLV-603P	Magnetic Low Voltage, Small Control	Single Pole/3-Way	450W																																																														
Lutron Nova	NTLV-1003P	Magnetic Low Voltage, Small Control	Single Pole/3-Way	800W																																																														
Lutron Nova	NLV-600	Magnetic Low Voltage, Small Control	Single Pole	450W																																																														
Lutron Nova	NLV-1000	Magnetic Low Voltage, Large Control	Single Pole	800W																																																														
Lutron Ceana	CNLV-603P	Magnetic Low Voltage	3-Way	450W																																																														
Lutron Diva	DVLV-103P	Magnetic Low Voltage	3-Way	800W																																																														
Lutron Diva	DVSLV-103P	Magnetic Low Voltage	3-Way	800W																																																														


DIMMING OPTION 6:

Standard Configuration

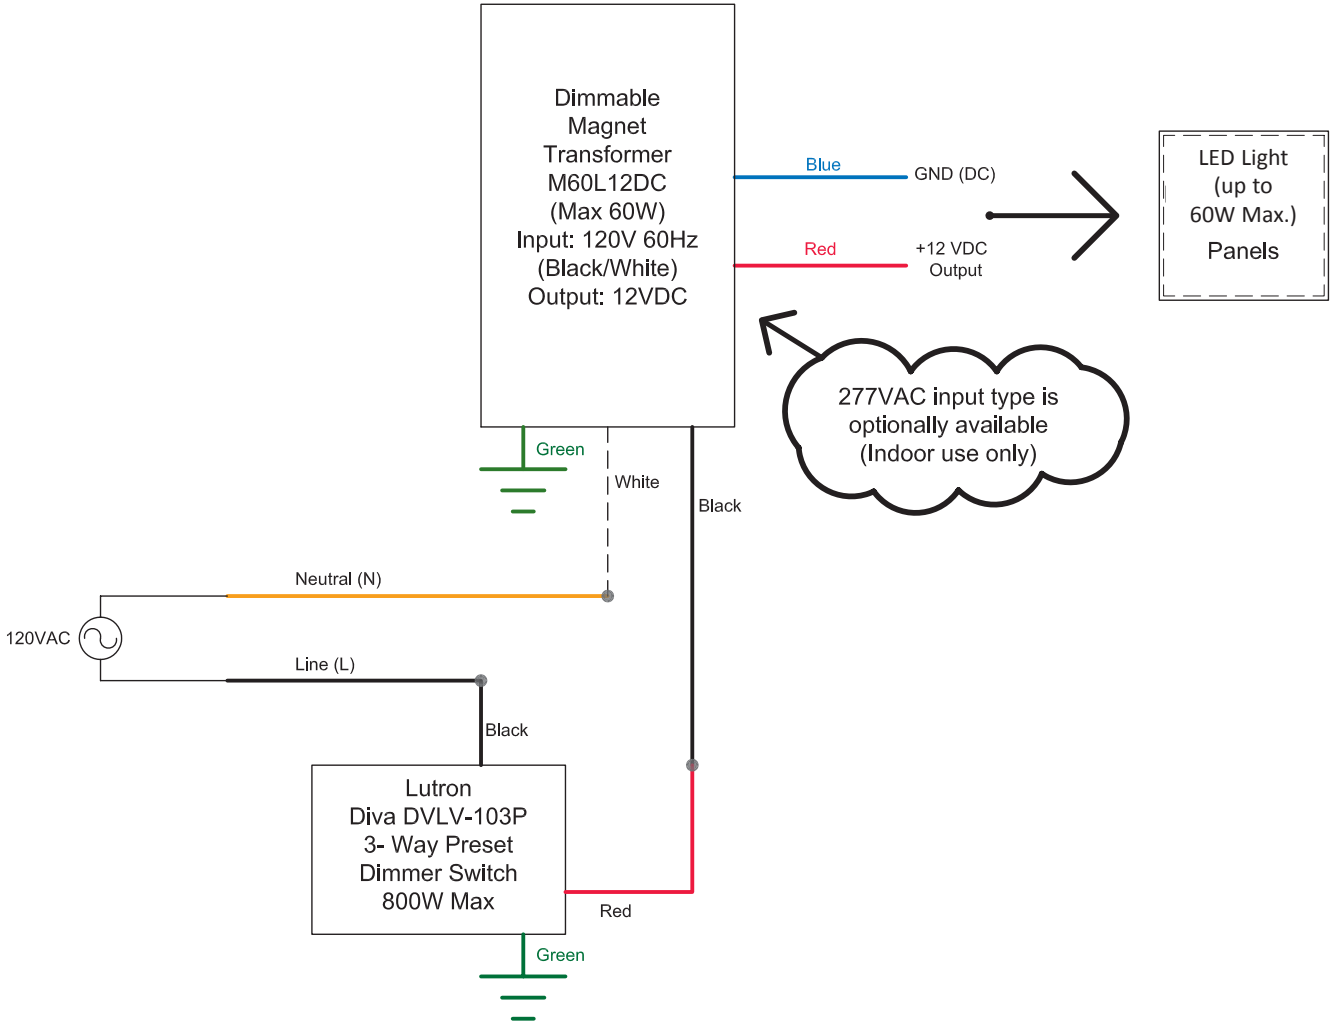


Plug-In Power Adaptor

Power Supply (DSA-12G-12FUS)

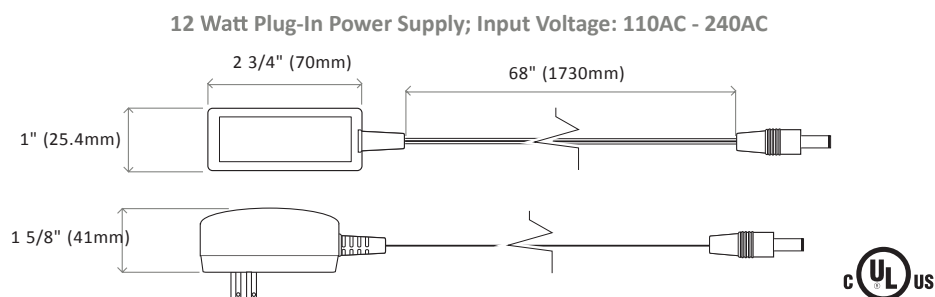


Power Supply (PA-60W-i5)

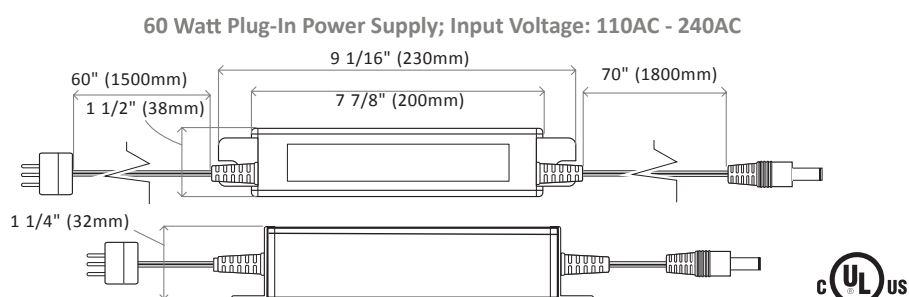


Hardwire Power Adaptors


Power Supply (PA-60W-HW)

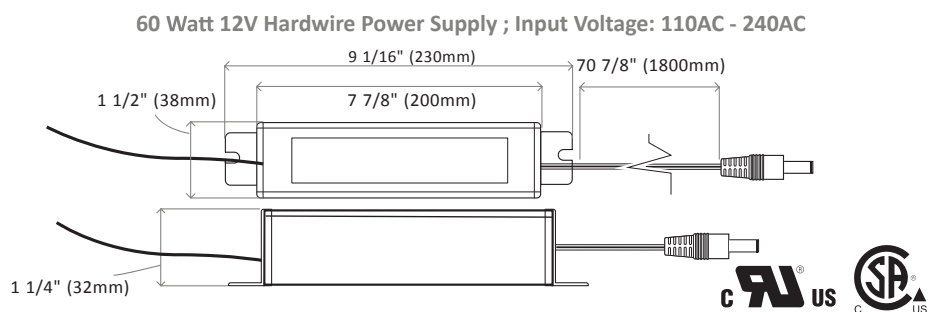

Power Supply (PA-150W-HW)

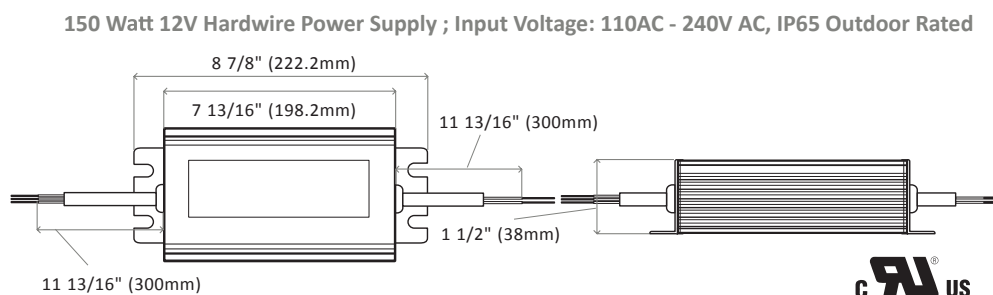

General Information For Spider Cables

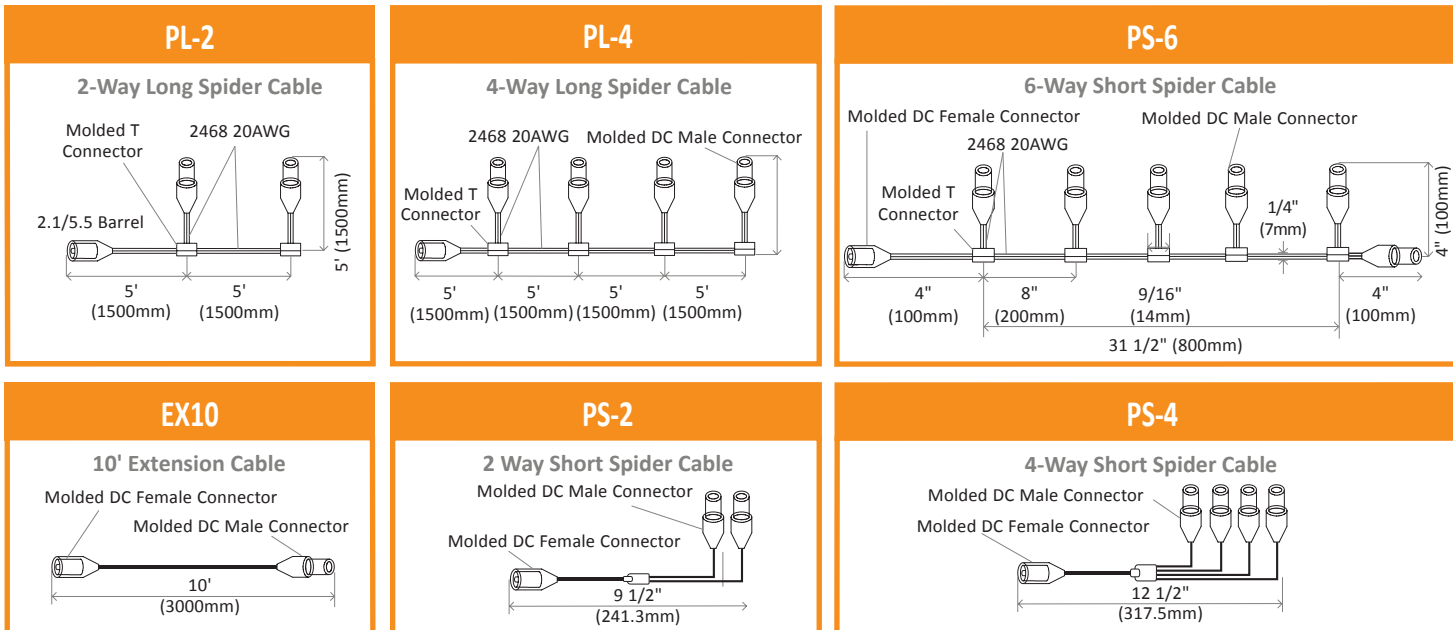

Order Information

LumiSheet - LED Light Panel

Series #	Size Length x Width (inch/mm)*	Color Temperature	Illuminated Face Option	Cable Length	LED Location
LLP 12 8mm 12V	CS - Custom shape (drawing may be required)	- WW - Warm White 3000K - NW - Neutral White 4100K - CW - Pure/Cool White 5300K * - CWHO - Pure/Cool White 5300K High Output	- SFI - Single face* - DFI - Double face	- WL15 - 5' (1500mm) power cord with 2.1/5.5mm barrel plug* - WL30 - 10' (3000mm) power cord with 2.1/5.5mm barrel plug	- L1 - LED along 1 long edge - L2 - LED along 2 long edges* - S1 - LED along 1 short edge - S2 - LED along 2 short edges - S4 - LED along All 4 edges - CI - Custom Illumination

* Denotes standard configuration of rectangular or square light panel **Standard configuration for all Double sided panels is to use CWHO - Cool White 5300K high output LEDs

Series #	Size Length x Width (inch/mm)*	Color Temperature	Illuminated Face Option	Cable Length	LED Location
LLP12	24" x 36"	CW	SFI	WL15	L2

LumiSheet™

LED Light Panel

CUSTOMIZABLE

- // Available in custom sizes & shapes
- // Can be used in "frameless" designs

BRIGHT & EVEN ILLUMINATION

- // 3D V-Cutting technology
- // High brightness (2,000 - 10,000 LUX)
- // Superior consistent light quality

LONG LIFESPAN

- // Patented heat sink technology to maximize LED lifespan (70,000 hours)

ENERGY EFFICIENT

- // Low power consumption (70% less than fluorescent)
- // Energy saving and maintenance free

WARRANTY

- // Advanced 3-year warranty



PERFECT BACKLIGHTING SOLUTION

LumiSheet™ is designed to emit a bright, even output of light across the entire surface of the panel. Unlike traditional light panels, which have the light source mounted on the exterior of the LGP (Light Guide Plate), LumiSheet™ integrates high brightness LEDs and the heat sink into our exclusive 3D V-cutting LGP which makes it possible to produce "frameless", rectangular or special shaped LED light panels for various application needs.


INTEGRATED HIGH QUALITY LEDs

LumiSheet™ integrates high quality 12V, constant voltage LEDs into the perimeter of the LumiSheet™ panel without the use of rigid frame materials. This process allows the LEDs to conform to almost any shape.




3D V-GROOVE LIGHT GUIDE PLATE (LGP)

LumiSheet™ utilizes crystal clear acrylic combined with a patented 3D V-groove etched grid pattern that provides even illumination to almost any shape imaginable.

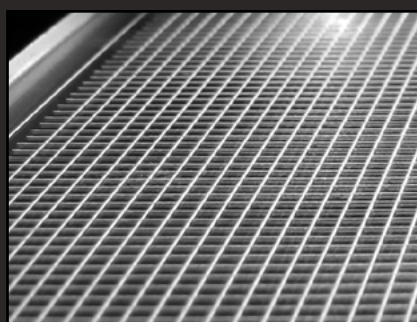


INTEGRATED THERMAL MANAGEMENT



All LEDs create heat which is detrimental to their life span. LumiSheet™ implements a patented technology which integrates the heat sink into the LGP that is easily conformable which allows for customizable shapes.

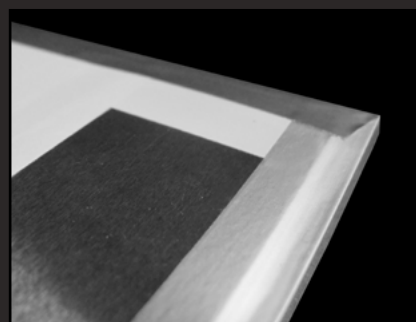


PROFILE OF LUMISHEET

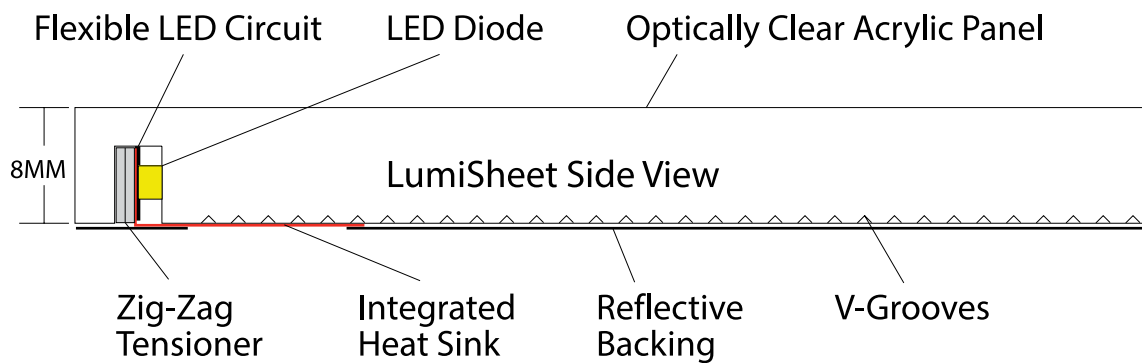

LED LIGHT LOCATIONS

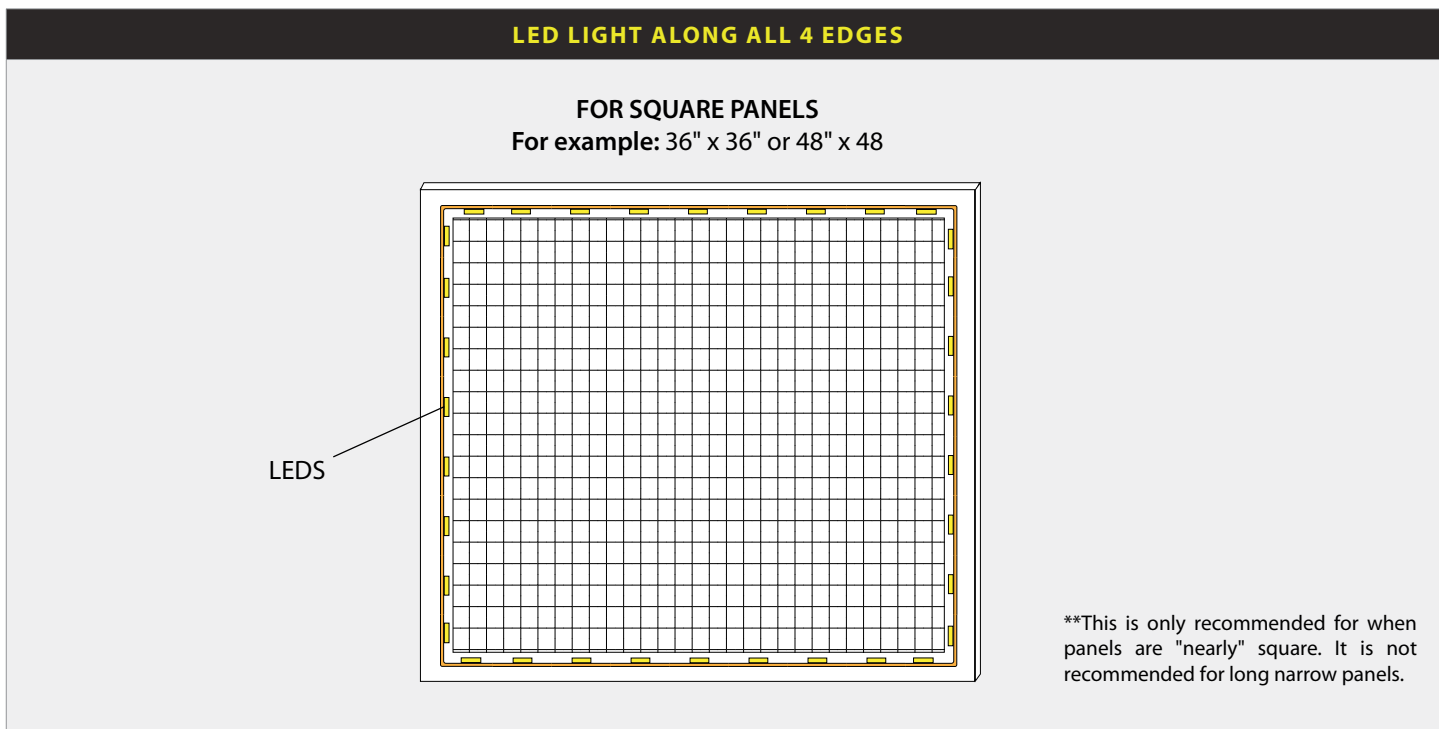
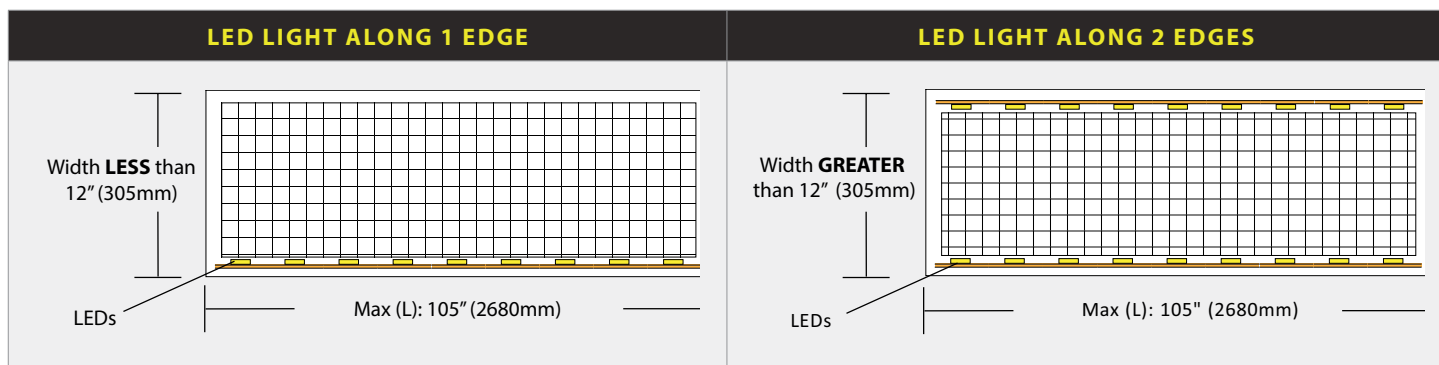


ILLUMINATED FACE OPTIONS

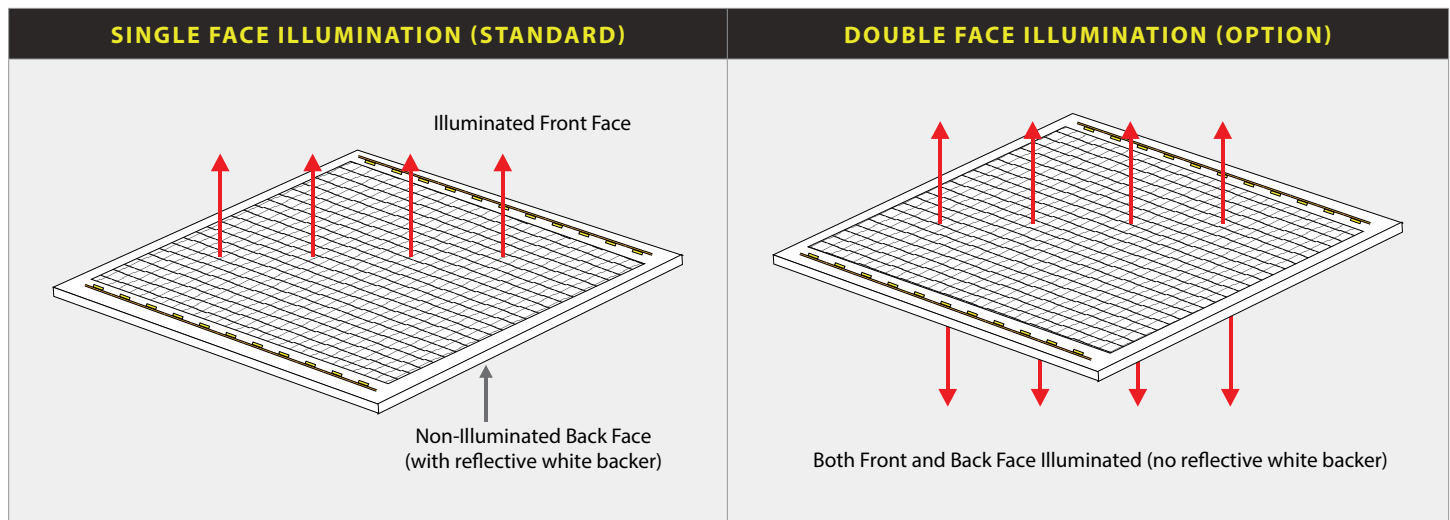


TYPICAL SURFACE BRIGHTNESS MEASURE


24" x 48" LumiSheet with high output 5300K LEDs lit along edges (40W)

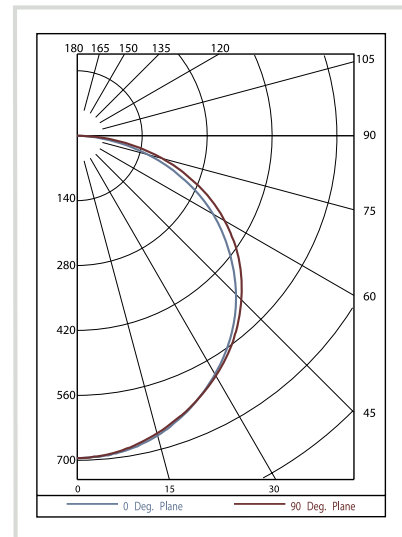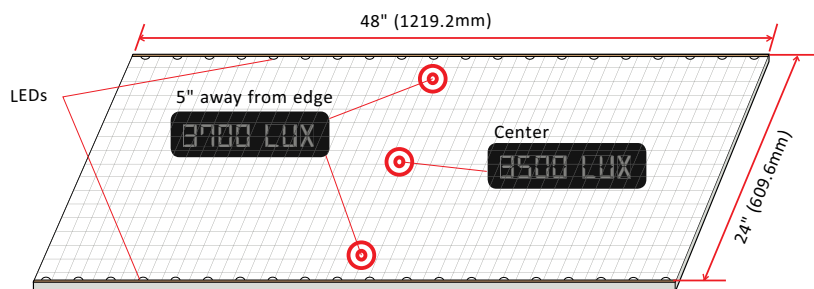

12" x 12" panel with regular 5300K LED lit along 2 edges (8W)

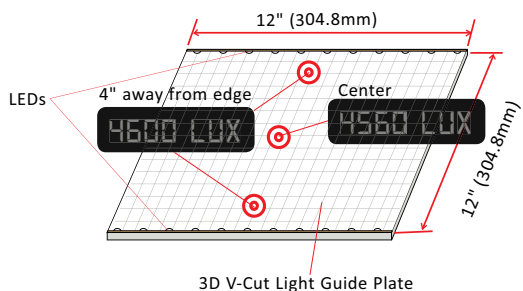


48" x 96" LumiSheet with high output 5300K LEDs lit along 2 long edges (80W)

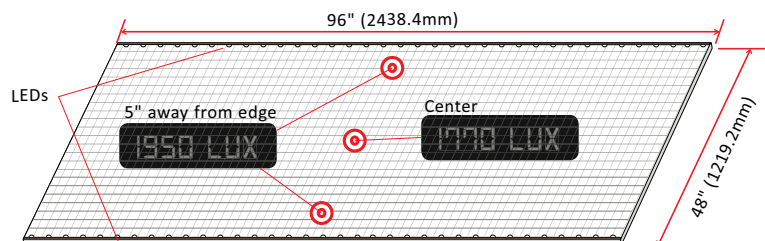

*Brightness readings are for reference only. Actual reading may differ for different LEDs, LGPs or even different meters.


3D V-CUTTING TECHNOLOGY

A significant advantage to LumiSheet™ lies in the production of the Light Guide Plate (LGP). Sourced for its rigidity and light transmission properties, an optical grade PMMA acrylic is etched with multiple grooves using patented 3D V-cutting technology to create a uniform matrix. This etched matrix acts as a vehicle to transport light from the unit's embedded LEDs across the entire surface of the panel to deliver homogeneous illumination.

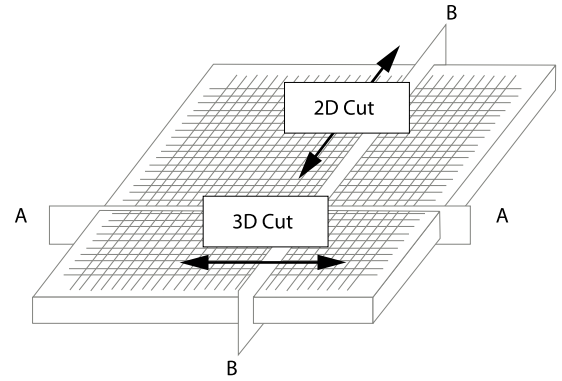


Section A-A


1 Side LED

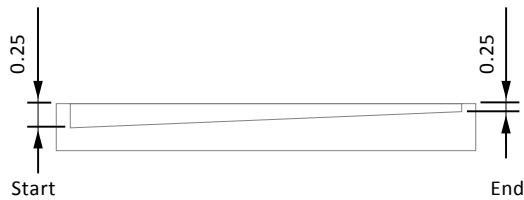

2 Sides LED

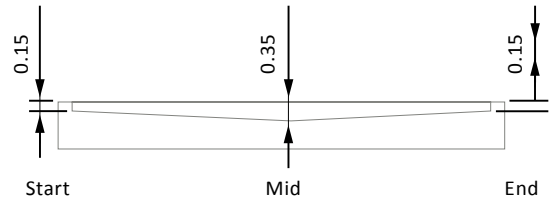

Section B-B

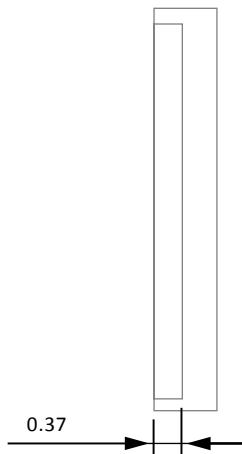

3D V-cutting technology ensures that light is evenly reflected throughout the surface of the acrylic Light Guide Plate (LGP) by making grooves on the LGP at specific intervals according to the location of the light source and the direction of irradiation. The vertical V-grooves are widely spaced when they are close to the light source, but narrowly spaced when they are farther away from the light source. The horizontal V-grooves gradually grow wider and deeper as their distance from the light source increases. Therefore, the brightness of the front surface of the LGP is able to remain uniform.

SPECIFICATIONS

ELECTRICAL					
Input Voltage	12 Volt DC - Constant Voltage				
Power Consumption	4.0 Watts/ft (Standard LEDs)	5.0 Watts/ft (High Output LEDs)	5.0 Watts/ft (White Adjustable LEDs)	4.5 Watts/ft (RGB LEDs)	
Wire Size	20 AWG 2 wire (Standard/HO LEDs)	20 AWG 3 wire (White Adjustable LEDs)		22 AWG 4 wire (RGB LEDs)	
Wiring	Each panel must have direct connection to power supply. Do not wire panels in series.				
*Connector	2.1/5.5mm barrel plug (Standard/HO LEDs)	3 pin molex (White Adjustable LEDs)		No connector (RGB LEDs)	
Certification	UL / cUL (E334549)				
PHYSICAL					
Color Temperature	Warm White approx. 3000K	Neutral White approx. 4100K	Pure/Cool White approx. 5300K	White Adjustable 3000K - 6500K	Color Adjustable **RGB
Mounting Examples	Wall mounted with screws, Z-clips, U-channel, mirror clips or standoffs				
Operating Temperature	-30°C (-22°F) ~ +40 °C (+104 °F)				
Environment	Dry location (Standard)				
Thickness	***8MM (Standard), 6MM and 10MM also available depending on application				
Minimum Size	2"W x 2"L x 5/16" D (50mm x 50mm x 8mm)				
Maximum Size	59"W x 118"L x 5/16"D (1499mm x 2997mm x 8mm)				
Weight	1.95 lbs/sq. ft.			9.54 kg/sq. M	
STANDARD PLUG-IN POWER ADAPTORS					
Power Adaptors	12V DC, 1A, 12W, UL listed			12V DC, 5A, 60W UL class 2 listed	
Spider Cables	PL-2: 2-way long spider cable	PL-4: 4-way long spider cable		PS-2 / PS-4 / PS-6: 2/4/6-way short spider	
STANDARD HARDWIRE POWER ADAPTORS					
Power Adaptors	PA-60W-HW 60W 12V Hardwire power adaptor Input 110V AC ~ 240V AC			PA-150W-HW 150W 12V Hardwire power adaptor Input 110V AC ~ 240V AC	
Dimming & Controls	Refer to dimming & control options				

* Standard 5'; Optional 10'

**See RGB product line for more details

***Please consult an Evo-Lite™ sales engineer if a thickness other than 8MM is desired

Color Temperature:  Warm White 3000K  Neutral White 4100K  Pure / Cool White 5300K  White Adjustable 3000K - 6500K  Color Adjustable RGB

BRIGHTNESS & POWER CONSUMPTION REFERENCE

SIZE (INCH)	SIZE (MM)	LED STRIP	*AVERAGE SURFACE BRIGHTNESS (LUX)	POWER CONSUMPTION (W)
6 x 6	150 x 150	1 side	5,000 (DL)	2.0
12 x 12	300 x 300	1 side	3,500 (DL)	4.0
24 x 24	600 x 600	2 sides	2,800 (DL)	15.0
36 x 36	900 x 900	2 sides	2,000 (DL)	23.0
48 x 48	1200 x 1200	2 sides	1,800 (HO)	40.0
48 x 96	1200 x 2400	2 sides	1,800 (HO)	80.0
Ø 6	Ø 150	all around	17,000 (DL)	5.8
Ø 12	Ø 300	all around	11,000 (DL)	11.2
Ø 24	Ø 600	all around	4,500 (DL)	24.0
Ø 36	Ø 900	all around	3,000 (DL)	36.0
Ø 48	Ø 1200	all around	2,200 (DL)	48.0


*Brightness data was measured from Jan. to Aug., 2009. "DL" denotes regular LEDs. "HO" denoted high output LEDs.

INSTALLATION TIPS


PRODUCT INTEGRATION ADVISORY

The use of adhesives of any type for the bonding of materials to LumiSheet or any other light guide product is strongly discouraged. Direct bonding can result in visual anomalies. Be sure to remove clear protective film before installation.

SINGLE PANEL

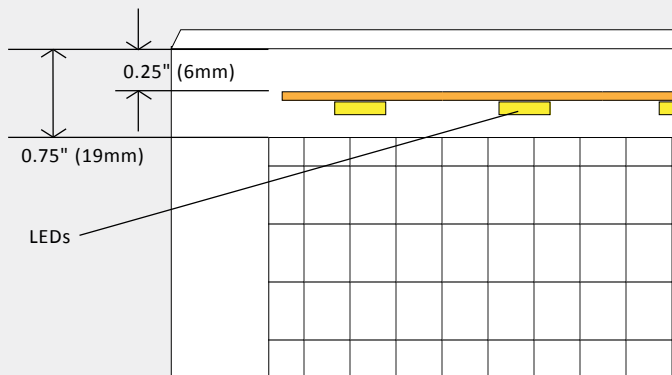

MULTI-PANEL

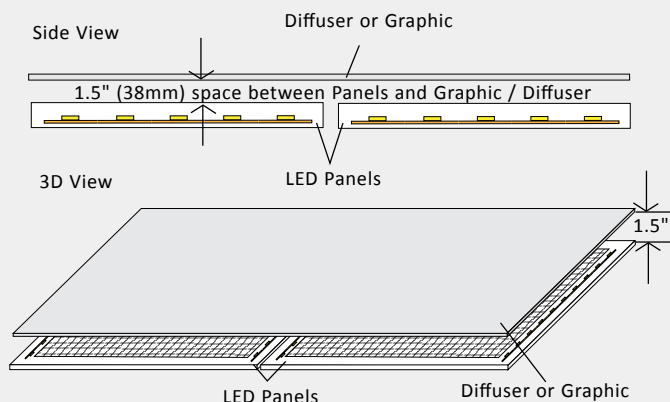


LEDs are typically installed along a groove 0.25" away from the edge. The hot spots created by the LEDs can be managed in many ways. We recommend testing the material to be backlit in order to determine if diffusion is necessary.

When placing panels side by side to create a larger illuminated area, you may see a bright line (LED illuminated edge) or dark line (non-illuminated edge) where they meet. These areas show differently depending on the overlay material being used. We recommend testing the material to be backlit in order to determine if additional diffusion or space is necessary.

SURFACE MOUNTING EXAMPLES


OPTION 1

Screw mounting with pre-drilled holes

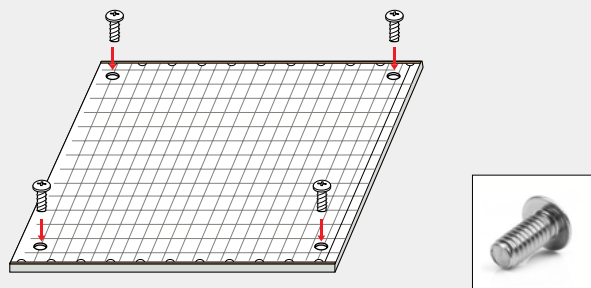


OPTION 2

Mounting with mirror clips

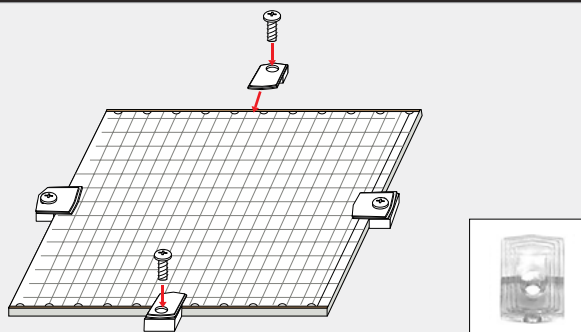


OPTION 3

Mounting with Z-clips

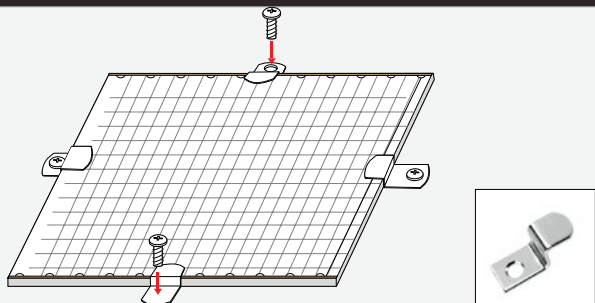


OPTION 4

Mounting with standoffs

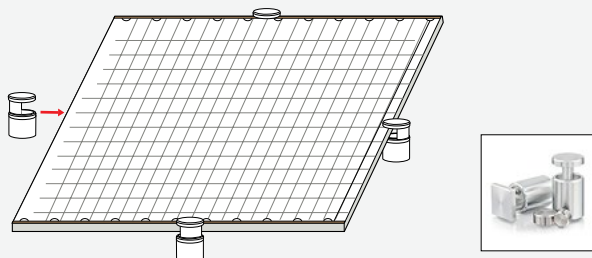


TYPICAL POWER EXITS


STANDARD 1
Power cord exits from short side (edge) corner (standard)

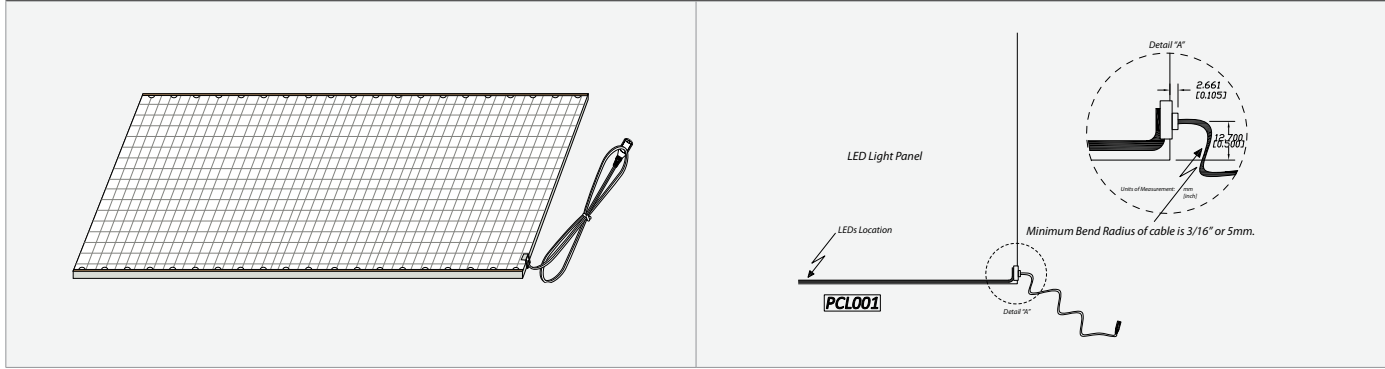


STANDARD 2
Power cord exits from the middle of each long side for LumiSheet longer than 6ft

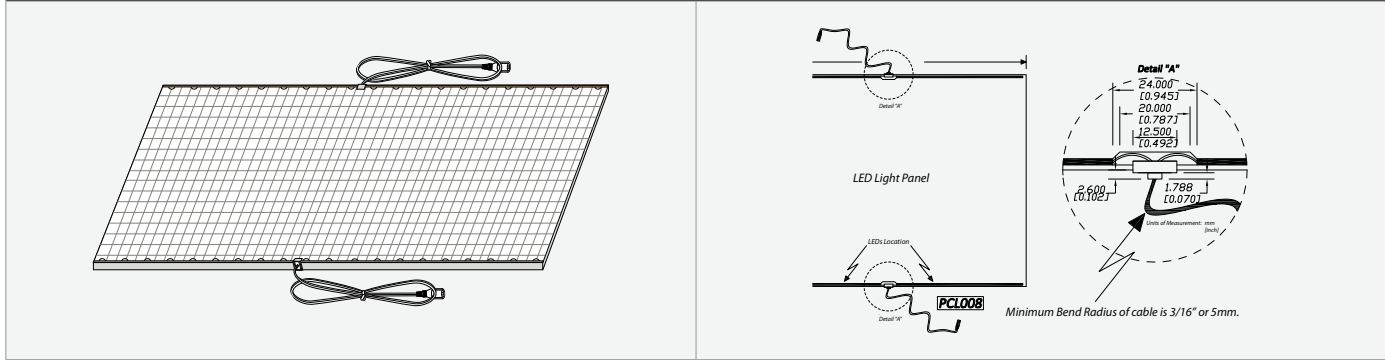

OPTION 1
Power cord exits from the back side of LumiSheet

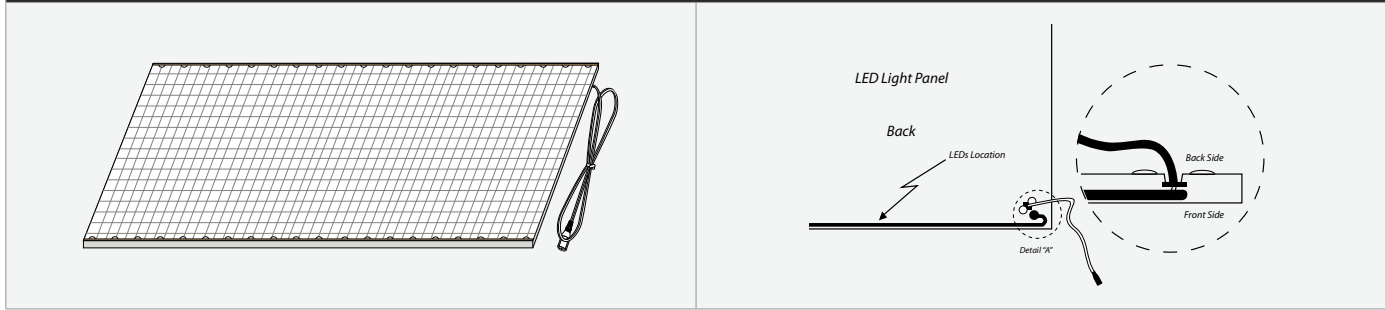

OPTION 2
Recessed (notched) power cord exits

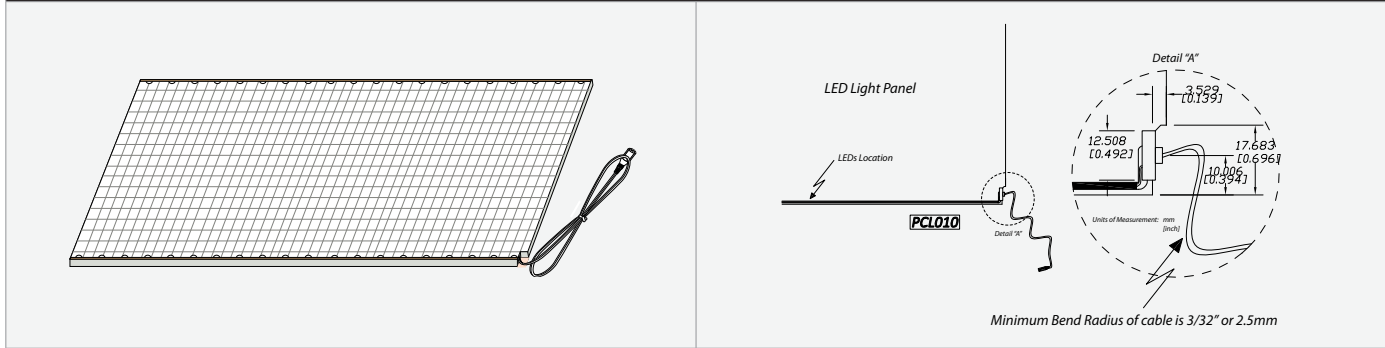



Evo-Lite, LLC

1393 S. Santa Fe Dr. Denver, CO 80223

Main Phone: 303-996-2980

Toll Free: 1-888-887-2980

E-mail: info@Evo-Lite.com

URL: www.Evo-Lite.com

TERMS & CONDITIONS

Be sure to familiarize yourself with Evo-Lite's Terms & Conditions.
By ordering from Evo-Lite, the purchaser agrees to all Terms & Conditions.

PATENTS

LumiSheet™ PATENTS

USA: 7473022
CANADA: 2,626,448
JAPAN: 4427528
CHINA: ZL 200610085027.0
TAIWAN: 312899
SINGAPORE: 141901
SOUTH AFRICA: 2008/03676
EUROPEAN UNION: 1,780,584
(Germany, UK, France, Italy, Spain,
The Netherlands, Belgium, Sweden,
Austria, Poland, Denmark, Greece,
Ireland, Finland, Portugal, Czech
Republic, Hungary, Romania, Slovakia,
Bulgaria, Switzerland, Luxembourg,
Slovenia, Turkey, Latvia)

V-CUTTER FOR AN LCD LIGHT GUIDE PANEL

USA: 6619175
JAPAN: 3500466
TAIWAN: 155175

A LIGHT GUIDE PANEL WITH SALANT LIGHT GUIDING PARTS

USA: US 7,018,087 B2

PIN KIT FOR V-CUTTER


KOREA: 10-0552589, 10-0557738,
10-0557741, 0540055, 0540053,
10-0772921, 10-0716543,
10-0565890, 10-0753963,
10-0643604,
10-0736656, 10-0748074,
10-0748073, 10-0762741,
USA: 6792842
JAPAN: 3463060
EU: 1335817
CHINA: ZL 01818623.8
TAIWAN: 163820

LIGHT FIELDS™ LED

LED
3000K, 3500K or 4000K

Recessed

1' x 1'



Applications: LIGHT FIELDS™ LED offers flexibility in innovative office lighting. The Micro-Pyramidal Optic (MPO) produces an unusually brilliant lighting quality without glare or reflections on computer screens. Use not just in offices but for healthcare, retail, conference rooms, corridors and reception areas.

online
Find it Fast

1052

LED


Type: _____ Quantity: _____ Project: _____

LFULED-11-20-K40-MP-DH2-WF

FIXTURE/CEILING TYPE	LENGTH	WATTAGE	CCT (K)	OPTIC	DRIVER	OPTIONS
LFULED LIGHT FIELDS™ LED 15/16" Lay-In, Flush 9/16" Slot-Grid, Flush 9/16" Lay-In, Tegalur LFFLED LIGHT FIELDS™ LED 9/16" Lay-In, Flush LFTLED LIGHT FIELDS™ LED Center of Tile Mounting White LED Typical Ra / R9 Values 85CRI 10.7R9	11 1' x 1'	20W 20W 1300lm +/- 5% 24W 24W 1600lm +/- 5% <div>CCT Multiplier for Lumen Output 3000K 0.97 3500K 1.00 4000K 1.08</div>	K30 3000K K35 3500K K40* 4000K * 4000K requires longer lead time 3.5-step MacAdam, +126K/-50K @ 3000K,+75K/- 168K @ 3500K, +110K/-165K @ 4000K initial color binning	MP Micro-Pyramidal Diffuser	DU Standard 0-10V Universal Dimming Driver 120/277V DH_* Lutron HiLume A Series * Specify " 1" for 120V or " 2" for 277V.	WF Whip Flex 3/8" X 6' 14 AWG WN_* Whip Flex 3/8" X 6' 14 AWG (NYC) CP** Chicago Plenum F Fusing PF Concealed Ceiling Plaster Frame Kit, Flangeless Appearance (<i>can only be ordered with LFU fixtures</i>) EM_* Standby Battery Pack, 750 lm, 10W WS105_* WattStopper Super High Frequency Sensor FM-105 * Specify " 1" for 120V or " 2" for 277V. ** Chicago Plenum option not available for Sheetrock Ceiling

To order Plaster Frame Kit for sheetrock ceilings, select "PF" in the fixture options, along with the following:

LF11PF1 Concealed Ceiling Plaster Frame Kit, Flangeless Appearance, 1 Luminaire

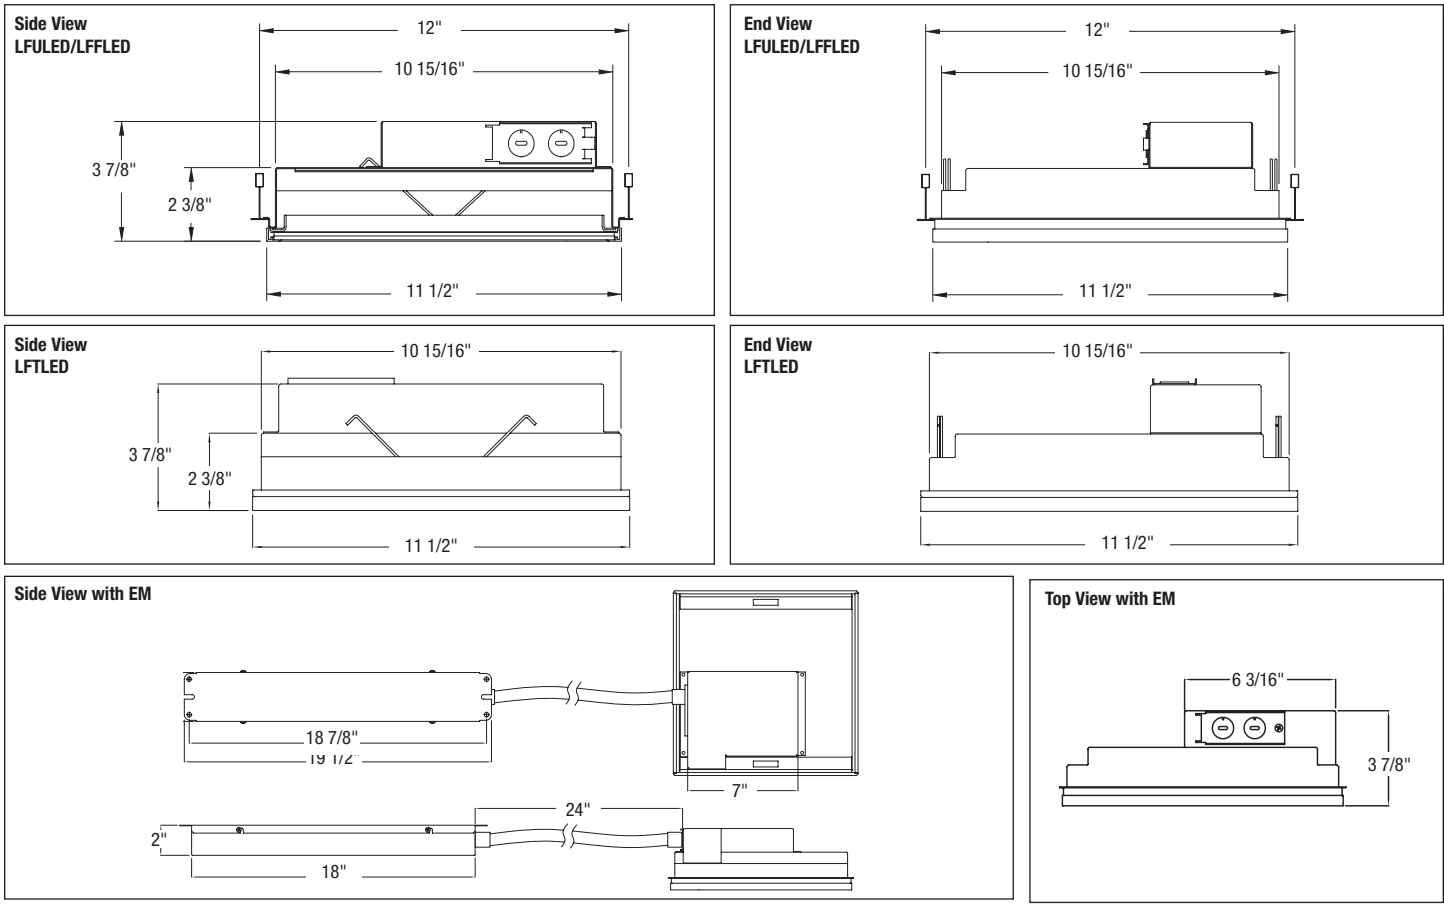

COMPANION LUMINAIRE OPTIONS	FIF #	COMPANION LUMINAIRE OPTIONS	FIF #
2x2 LIGHT FIELDS™ LED – Recessed	1053	2x2 LIGHT FIELDS™ LED – Surface Mount / Suspended	1054
1x4 LIGHT FIELDS™ LED – Recessed	1050	1x4 LIGHT FIELDS™ LED – Surface Mount / Suspended	1051

Descriptions



IC-Rated

IBEW Union Made

*Suitable for damp locations
NYC Approved*



Registration, Evaluation and
Authorization of Chemicals

1. Housing – 20 gauge cold-rolled steel housing. Finish is powder-coated white. Post painted.

2. Wattage and CCT – 20W or 24W. Available in 3000K, 3500K or 4000K color temperatures. Initial color binning for LEDs is +126K/-50K @ 3000K, +75K/-168K @ 3500K, +110K/-165K @ 4000K, and potential color shift over the life of the LEDs is +/- 50K @ 50,000 hrs.

3. Optics – MPO Micro-Pyramidal optic with seamless look and defined light emission for glare-free light distribution. Frame is extruded aluminum, painted Zumtobel Silver.

4. Driver – Universal voltage 120/277V with integral 0-10V dimming. For non-dimming requirements, order DU driver but do not connect to dimming control during installation. Also available with Lutron A-Series driver.

5. Mounting – Lay-in mounting for typical grid ceilings (LFULED). LFTLED mounting requires grid to be cutout. Fixture is supported by mounting bar attached to housing brackets with screws (by others). LFTLED mounting bracket is designed for 2' ceiling tiles only. Use PF (Plaster Frame kit) with LFULED fixture for sheetrock ceiling installation.

LIGHT FIELDS™ LED recessed can also be mounted into a sheetrock wall using the PF kit if the wall has appropriate spacing available, and blocking will have to be built out. Wall mount not recommended with EM fixtures. Follow PF kit installation instructions.

6. Occupancy Sensor – Option of WattStopper FM-105 occupancy sensor located behind lens. It detects motion via super high frequency (SHF) electromagnetic waves and the Doppler principle. Range sensitivity is up to 20'. Due to the nature of the LIGHT FIELDS™ LED optic and lens, the sensor shadow is visible through the lens.

Compatible with the following remote sensors:

- Philips ActiLume LR11655/00 Daylight and Occupancy Sensor
- Philips ActiLume Classic LRM2320
- Hubbell DLC-7 Daylight Sensor

7. Life – 60,000 hours rated life. L70.


8. Standby Battery Pack – Remote standby battery pack with integral test switch. 90 minute run time, provides 750 lm with 10W.

9. MicroBinning™ – Beyond the finer quarter-binning we have already applied to most of our standard LED product lines, we define an even finer color binning (~ 2-step MacAdam) in our LIGHTFIELDS™ LED product by using the MicroBin™ technique from Zumtobel US. We use the LEDs with color coordinates located in diagonal directions within a quarter-bin and mix them on the board level with our own formula. The result is a fine-tuned, tighter overall color output from the luminaire that is much closer to exactly the specified color temperature such as 3500K, 3000K, or 4000K. This technique has been proven to work for all different

luminaire sizes such as 2x2, 1x4, and 1x1. Both the color uniformity within a single fixture and the color consistency from fixture to fixture are dramatically increased to a level that the output white light is visually non-discernable from the light coming from a single bin located at the center of a particular color temperature white light.




10. Weight – 6 lbs. with EM 11 lbs.

NOTE: For non-dimming installations, simply cap off the two control wires and connect the hot/neutral and ground as normal.

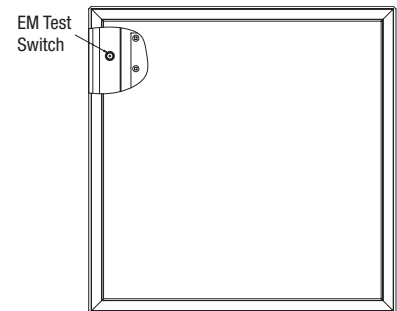

Mounting with common ceiling types

Ceiling (Grid or Block) cannot exceed heights shown in the drawings below.

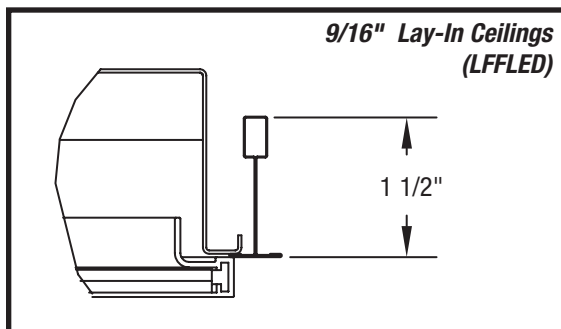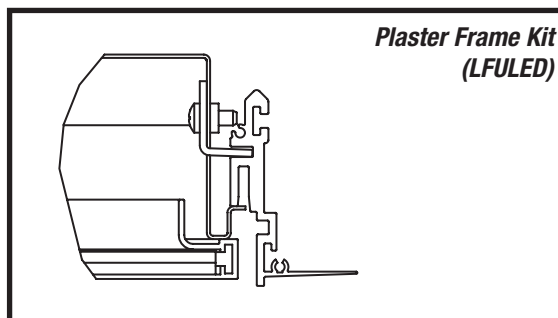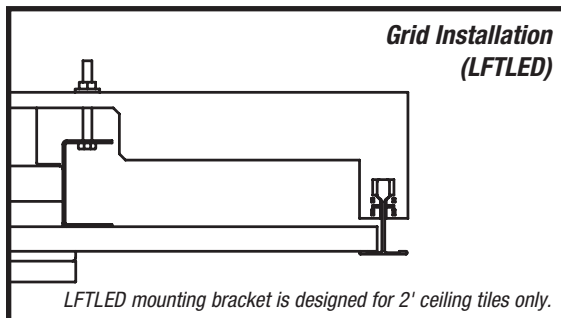

Mounting

Zumtobel Lighting, Inc. © 2014
3300 Route 9W
Highland, NY 12528-2630

845-691-6262
800-448-4131
zli.us@zumtobel.com

D00579TS 09/08/14

www.zumtobel.us

In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear on www.zumtobel.us are the most recent version and supersede all other versions that exist in any other printed or electronic form.



Photometric Data

LIGHT FIELDS™ LED, 1x1, 20W, 4000K

Efficacy = 68.3lm/W

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45°	6772	7301	6774
55°	4485	3101	4504
65°	1877	2253	1898
75°	2160	1447	2177
85°	787	647	938


LIGHT FIELDS™ LED, 1x1, 24W, 4000K

Efficacy = 67lm/W


Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45°	7617	8437	7782
55°	5214	3650	5219
65°	2321	2635	2305
75°	2339	1682	2390
85°	988	710	913

Candela Distribution

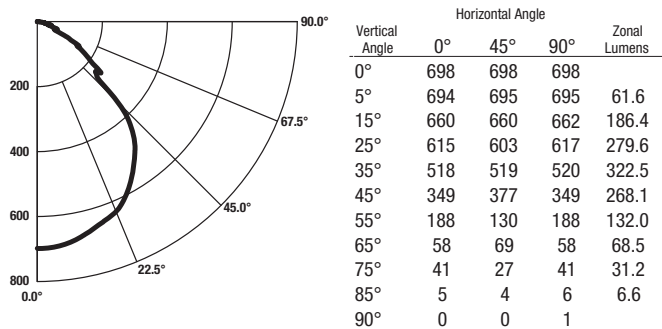

Candela Distribution

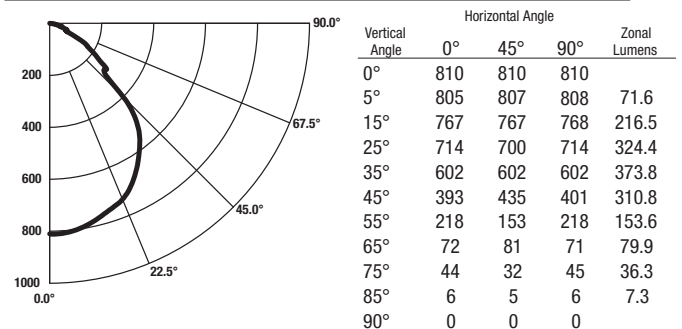

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106		
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93		
2	103	97	91	86	101	95	90	85	91	87	83	88	85	82		
3	96	87	80	75	93	85	79	74	83	77	73	80	75	72		
4	89	79	71	65	87	77	70	65	75	69	64	73	68	63		
5	82	71	64	58	81	70	63	58	68	62	57	66	61	56		
6	77	65	57	52	75	64	57	51	63	56	51	61	55	51		
7	72	60	52	46	70	59	52	46	57	51	46	56	50	46		
8	67	55	47	42	66	54	47	42	53	46	42	52	46	41		
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38		
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35		

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20


RC	80				70				50				30			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106		
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93		
2	103	97	91	86	101	95	90	85	91	87	83	88	85	82		
3	96	87	80	75	93	85	79	74	83	77	73	80	76	72		
4	89	79	71	66	87	77	70	65	75	69	64	73	68	63		
5	82	71	64	58	81	70	63	58	68	62	57	67	61	57		
6	77	65	57	52	75	64	57	51	63	56	51	61	55	51		
7	72	60	52	46	70	59	52	46	57	51	46	56	50	46		
8	67	55	47	42	66	54	47	42	53	46	42	52	46	41		
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38		
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35		

LIGHT FIELDS™ LED

LED
3000K, 3500K or 4000K

Recessed

1' x 1'



Applications: LIGHT FIELDS™ LED offers flexibility in innovative office lighting. The Micro-Pyramidal Optic (MPO) produces an unusually brilliant lighting quality without glare or reflections on computer screens. Use not just in offices but for healthcare, retail, conference rooms, corridors and reception areas.

online
Find it Fast

1052

LED


Type: _____ Quantity: _____ Project: _____

LFULED-11-24-K40-MP-DH2-WF

FIXTURE/CEILING TYPE	LENGTH	WATTAGE	CCT (K)	OPTIC	DRIVER	OPTIONS
LFULED LIGHT FIELDS™ LED 15/16" Lay-In, Flush 9/16" Slot-Grid, Flush 9/16" Lay-In, Tegalur LFFLED LIGHT FIELDS™ LED 9/16" Lay-In, Flush LFTLED LIGHT FIELDS™ LED Center of Tile Mounting White LED Typical Ra / R9 Values 85CRI 10.7R9	11 1' x 1'	20W 20W 1300lm +/- 5% 24W 24W 1600lm +/- 5% <div>CCT Multiplier for Lumen Output 3000K 0.97 3500K 1.00 4000K 1.08</div>	K30 3000K K35 3500K K40* 4000K * 4000K requires longer lead time 3.5-step MacAdam, +126K/-50K @ 3000K,+75K/- 168K @ 3500K, +110K/-165K @ 4000K initial color binning	MP Micro-Pyramidal Diffuser	DU Standard 0-10V Universal Dimming Driver 120/277V DH_* Lutron HiLume A Series * Specify " 1" for 120V or " 2" for 277V.	WF Whip Flex 3/8" X 6' 14 AWG WN_* Whip Flex 3/8" X 6' 14 AWG (NYC) CP** Chicago Plenum F Fusing PF Concealed Ceiling Plaster Frame Kit, Flangeless Appearance (<i>can only be ordered with LFU fixtures</i>) EM_* Standby Battery Pack, 750 lm, 10W WS105_* WattStopper Super High Frequency Sensor FM-105 * Specify " 1" for 120V or " 2" for 277V. ** Chicago Plenum option not available for Sheetrock Ceiling

To order Plaster Frame Kit for sheetrock ceilings, select "PF" in the fixture options, along with the following:

LF11PF1 Concealed Ceiling Plaster Frame Kit, Flangeless Appearance, 1 Luminaire

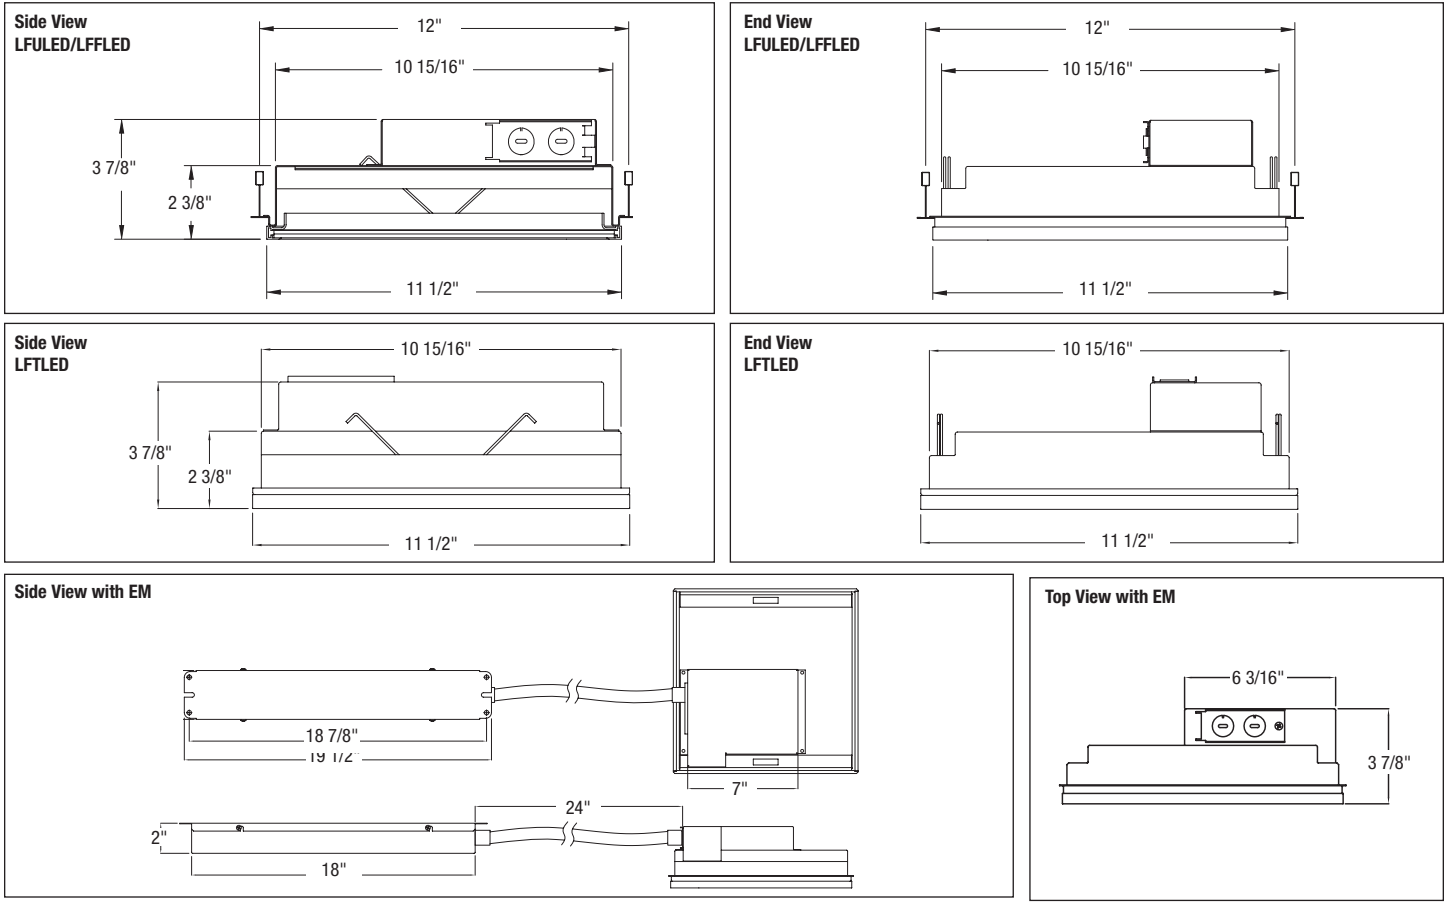

COMPANION LUMINAIRE OPTIONS	FIF #	COMPANION LUMINAIRE OPTIONS	FIF #
2x2 LIGHT FIELDS™ LED – Recessed	1053	2x2 LIGHT FIELDS™ LED – Surface Mount / Suspended	1054
1x4 LIGHT FIELDS™ LED – Recessed	1050	1x4 LIGHT FIELDS™ LED – Surface Mount / Suspended	1051

Descriptions



IC-Rated

IBEW Union Made

*Suitable for damp locations
NYC Approved*



1. Housing – 20 gauge cold-rolled steel housing. Finish is powder-coated white. Post painted.

2. Wattage and CCT – 20W or 24W. Available in 3000K, 3500K or 4000K color temperatures. Initial color binning for LEDs is +126K/-50K @ 3000K, +75K/-168K @ 3500K, +110K/-165K @ 4000K, and potential color shift over the life of the LEDs is +/- 50K @ 50,000 hrs.

3. Optics – MPO Micro-Pyramidal optic with seamless look and defined light emission for glare-free light distribution. Frame is extruded aluminum, painted Zumtobel Silver.

4. Driver – Universal voltage 120/277V with integral 0-10V dimming. For non-dimming requirements, order DU driver but do not connect to dimming control during installation. Also available with Lutron A-Series driver.

5. Mounting – Lay-in mounting for typical grid ceilings (LFULED). LFTLED mounting requires grid to be cutout. Fixture is supported by mounting bar attached to housing brackets with screws (by others). LFTLED mounting bracket is designed for 2' ceiling tiles only. Use PF (Plaster Frame kit) with LFULED fixture for sheetrock ceiling installation.

LIGHT FIELDS™ LED recessed can also be mounted into a sheetrock wall using the PF kit if the wall has appropriate spacing available, and blocking will have to be built out. Wall mount not recommended with EM fixtures. Follow PF kit installation instructions.

6. Occupancy Sensor – Option of WattStopper FM-105 occupancy sensor located behind lens. It detects motion via super high frequency (SHF) electromagnetic waves and the Doppler principle. Range sensitivity is up to 20'. Due to the nature of the LIGHT FIELDS™ LED optic and lens, the sensor shadow is visible through the lens.

Compatible with the following remote sensors:

- Philips ActiLume LR11655/00 Daylight and Occupancy Sensor
- Philips ActiLume Classic LRM2320
- Hubbell DLC-7 Daylight Sensor

7. Life – 60,000 hours rated life. L70.


8. Standby Battery Pack – Remote standby battery pack with integral test switch. 90 minute run time, provides 750 lm with 10W.

9. MicroBinning™ – Beyond the finer quarter-binning we have already applied to most of our standard LED product lines, we define an even finer color binning (~ 2-step MacAdam) in our LIGHTFIELDS™ LED product by using the MicroBin™ technique from Zumtobel US. We use the LEDs with color coordinates located in diagonal directions within a quarter-bin and mix them on the board level with our own formula. The result is a fine-tuned, tighter overall color output from the luminaire that is much closer to exactly the specified color temperature such as 3500K, 3000K, or 4000K. This technique has been proven to work for all different

luminaire sizes such as 2x2, 1x4, and 1x1. Both the color uniformity within a single fixture and the color consistency from fixture to fixture are dramatically increased to a level that the output white light is visually non-discernable from the light coming from a single bin located at the center of a particular color temperature white light.




10. Weight – 6 lbs. with EM 11 lbs.

NOTE: For non-dimming installations, simply cap off the two control wires and connect the hot/neutral and ground as normal.

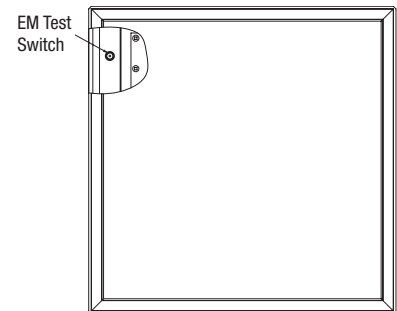

Mounting with common ceiling types

Ceiling (Grid or Block) cannot exceed heights shown in the drawings below.

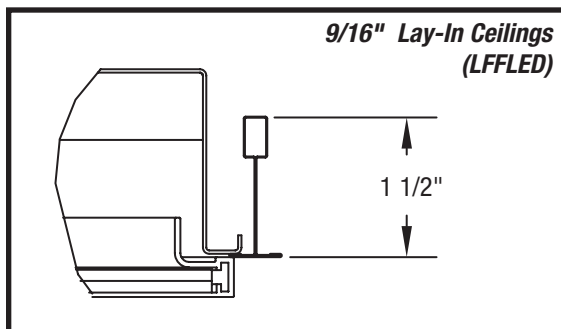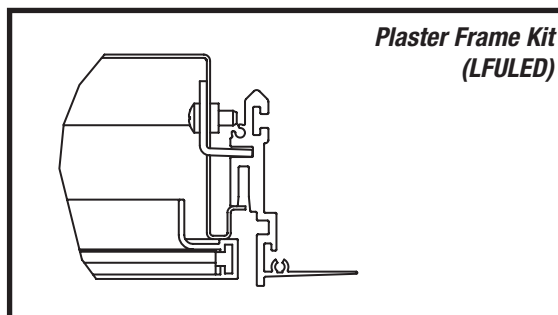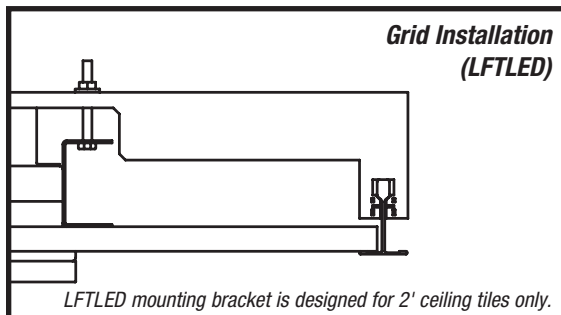

Mounting

Zumtobel Lighting, Inc. © 2014
3300 Route 9W
Highland, NY 12528-2630

845-691-6262
800-448-4131
zli.us@zumtobel.com

D00579TS 09/08/14

www.zumtobel.us

In a continuing effort to offer the best product possible we reserve the right to change, without notice, specifications or materials. Technical specification sheets that appear on www.zumtobel.us are the most recent version and supersede all other versions that exist in any other printed or electronic form.



Photometric Data

LIGHT FIELDS™ LED, 1x1, 20W, 4000K

Efficacy = 68.3lm/W

Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45°	6772	7301	6774
55°	4485	3101	4504
65°	1877	2253	1898
75°	2160	1447	2177
85°	787	647	938


LIGHT FIELDS™ LED, 1x1, 24W, 4000K

Efficacy = 67lm/W


Luminance Data (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45°	7617	8437	7782
55°	5214	3650	5219
65°	2321	2635	2305
75°	2339	1682	2390
85°	988	710	913

Candela Distribution

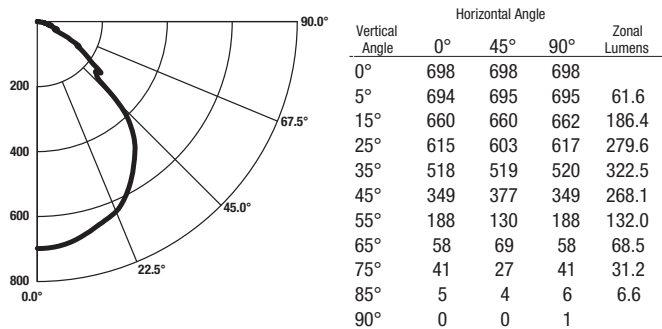

Candela Distribution

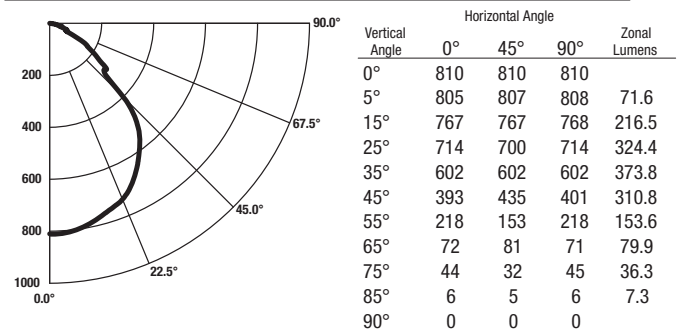

Coefficients Of Utilization - Zonal Cavity Method

Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106		
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93		
2	103	97	91	86	101	95	90	85	91	87	83	88	85	82		
3	96	87	80	75	93	85	79	74	83	77	73	80	75	72		
4	89	79	71	65	87	77	70	65	75	69	64	73	68	63		
5	82	71	64	58	81	70	63	58	68	62	57	66	61	56		
6	77	65	57	52	75	64	57	51	63	56	51	61	55	51		
7	72	60	52	46	70	59	52	46	57	51	46	56	50	46		
8	67	55	47	42	66	54	47	42	53	46	42	52	46	41		
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38		
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35		

Coefficients Of Utilization - Zonal Cavity Method





Effective Floor Cavity Reflectance 0.20

RC	80				70				50				30			
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106		
1	111	107	104	101	109	105	102	99	101	99	96	97	95	93		
2	103	97	91	86	101	95	90	85	91	87	83	88	85	82		
3	96	87	80	75	93	85	79	74	83	77	73	80	76	72		
4	89	79	71	66	87	77	70	65	75	69	64	73	68	63		
5	82	71	64	58	81	70	63	58	68	62	57	67	61	57		
6	77	65	57	52	75	64	57	51	63	56	51	61	55	51		
7	72	60	52	46	70	59	52	46	57	51	46	56	50	46		
8	67	55	47	42	66	54	47	42	53	46	42	52	46	41		
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38		
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35		



Made in USA

P43 LED Recessed

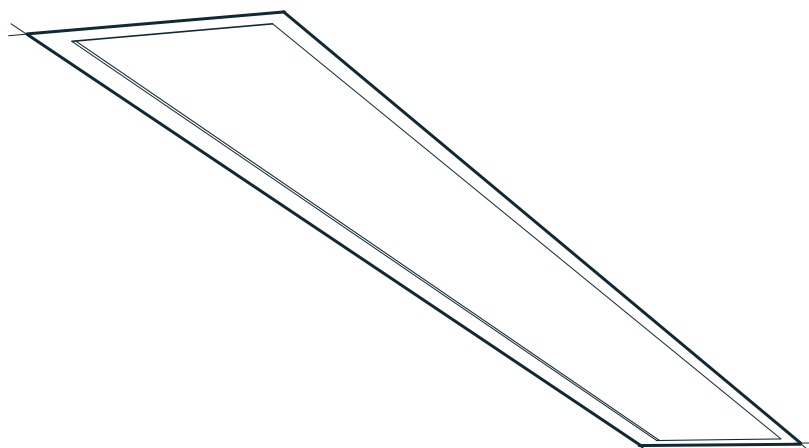

ordering - Standard System

lamp series/rows	nominal length	shielding	color/finish*	distribution	circuiting	voltage	ceiling system	controls/options
P43LED4SO-R08-SAL-YPE-D1-SC-UNV-X3B-DM01								
LED3	02'	SAL	TMW†	D1	SC	UNV*	X1*	ND non-dimming standard
LO, SO, HO*	03'	satin acrylic extruded lens	textured matte white	direct	single circuit	*120-277	exposed T-bar	DM10 0-10v 10% dimming
LED35	04'	OPL	YGW				X3B	DM01 0-10v 1% dimming
LO, SO, HO*	06'	opal frost acrylic lens	gloss white				hard ceiling (overhead mounting brackets)	STEP step dimming 100- 50-off
LED4	08'	SPL-OL*	YPE				X7	DML 1% Lutron dimming
LO, SO, HO*	R_*	silver parabolic louwer	pewter				hard ceiling (concealed flange)	DMD 1% DALI dimming
4000K	*row length	BLA-OL*	Y_				*standard	EML* emergency battery (350-600 lumens)
LO-Low Output, SO-Standard Output HO-High Output		blade louwer- anodized	CC					EMH emergency battery (1100-1200 lumens)
		BLW-OL*	*indicates color of flange -x1 and x3B ceiling systems only					FH fixture fusing (slow blow)
		blade louwer white	†standard					C2 90° 2-way corner
		*thin acrylic overlay masks LED's						CX special connector (consult factory)
								INTCW integrates with Sense™ System wireless switches as whiteboard luminaire
								*4' minimum length

Features A narrow 4" wide recessed LED lighting system that provides continuous lighting without socket shadows along the entire row length. See also Wall Wash & Perimeter.

Construction The housing, available in 2-, 3-, 4-, 6- or 8-foot standard lengths, is made of die-formed 20-gauge steel. Snap-in satin acrylic lens is clear frost extruded acrylic with a matte finish for soft, even light transmission.

Finish The standard housing and flange color is textured matte white (TMW) using polyester powder paint.

Electrical Must specify LED dimming controls. LED fixtures have constant current driver(s) with less than 20% THD when loaded to a minimum of 60%. Drivers sink a maximum of 6mA per driver. DM10 and

DM01 LED drivers are 0-10V dimmable and are compatible with most 0-10V wall slide dimmers and direct 0-10V analog signal dimmers. Recommended wall dimmer is Leviton IP710 or equivalent. See data sheet to confirm all specified dimmers meet required specifications. Fixtures are ETL Damp labeled and I.B.E.W. manufactured. Maximum driver size is 1.625" width by 1.25" height.

Mounting Fixture is to be recessed-mounted into exposed T-bar or hard ceiling applications.

Prudential reserves the right to change design specifications or materials without notice.



Recessed **P43 LED**


photometric data

P-43-LED35LO-SAL-D1

Report #Lo41411802 D=100% I=0.0%
Spacing Criteria: Along 1.16; Across 1.08

Delivered Lumens: 1566
Input Watts: 19.16
Lumens/Watt: 82

Calculated L70 \geq 100,000 hours
Reported L70 (6k) \geq 36,000 hours
5 year LED warranty - see prulite.com

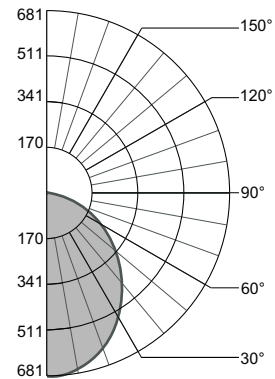

Zonal Lumen Summary


Zone	Lumens	%Luminaire
0-90	1566	100.00
90-180	0.00	0.00

Candlepower Summary

Vertical Angle	0°	25°	45°	65°	90°
0	681	681	681	681	681
5	673	673	674	672	673
10	658	658	659	653	653
15	636	637	629	623	621
20	608	600	596	585	580
25	566	561	550	537	531
30	523	519	504	488	480
35	476	473	453	436	427
40	427	423	400	384	375
45	380	370	349	333	325
50	326	317	299	284	277
55	278	271	252	238	232
60	234	226	211	199	194
65	185	179	168	158	154
70	140	134	128	119	116
75	96	93	87	83	81
80	57	56	53	51	50
85	26	26	25	25	25
90	0	0	0	0	0

Coefficients of Utilization (%)

Floor	effective floor cavity reflectance = .20											
Ceiling	80				70				50			
Wall	70	50	30	10	70	50	30	10	50	30	10	
0	119	119	119	119	116	116	116	116	111	111	111	
1	109	105	101	97	107	102	99	95	98	95	92	
2	100	92	85	80	97	90	84	79	86	81	77	
3	91	81	73	67	89	80	72	67	77	70	65	
4	84	72	64	57	82	71	63	57	69	62	56	
5	78	65	56	50	75	64	56	50	62	55	49	
6	72	59	50	44	70	58	50	44	56	49	43	
7	67	54	45	39	65	53	45	39	51	44	39	
8	62	49	41	35	61	48	41	35	47	40	35	
9	58	45	37	32	57	45	37	32	44	37	32	
10	55	42	34	29	54	41	34	29	40	34	29	

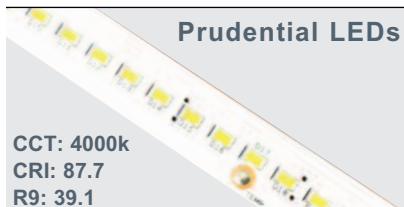

PruBin™ is Prudential Lighting's exclusive 'job binning' method that ensures color temperature consistency across all luminaires on a project. Meticulously testing and labeling EVERY LED board to +/- 25 lumens, +/- 50k CCT and +/- .004 Duv — while also separating positive from negative — allows us to match color, hue and intensity throughout a project and provides a consistent color temperature within a 2-step MacAdam ellipse.

LED Delivered Lumens and Watts


	P43	LED LO	LED SO	LED HO
Lumens	375 lm/ft	750 lm/ft	800 lm/ft	
Watts	5 w/ft	10 w/ft	12 w/ft	

Lumen output and wattages are nominal for all 3 color changes and may vary +/- 5%.


P43 LED Recessed

Installation

Adjoining Detail

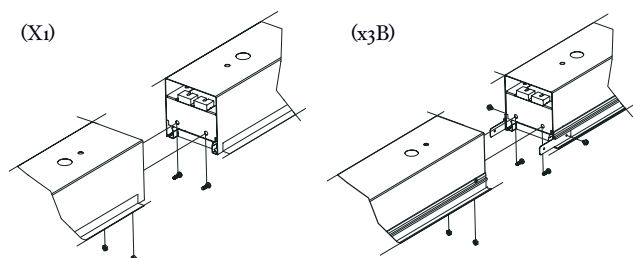


Ceiling Systems

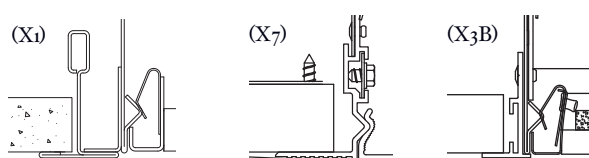


Framing Dimensions X3B & X7
Add 1/2" in fixture **width**, Add 5/8" in fixture **length**,

Mounting Locations

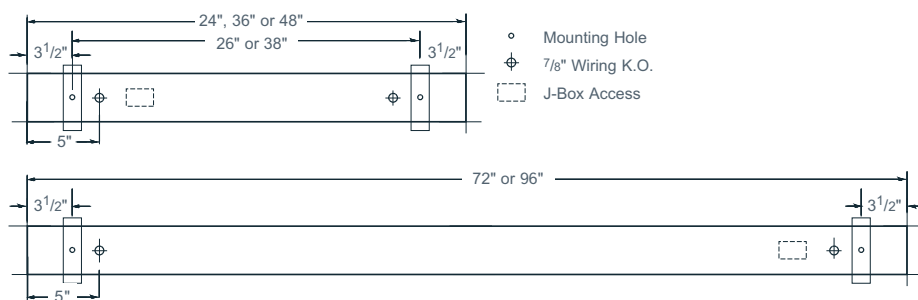

Frosted



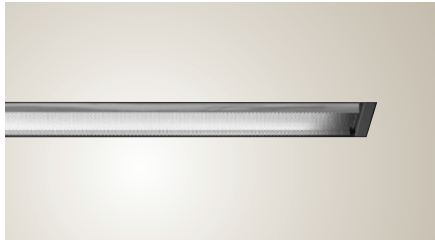

Lightline® Recessed
Wall-Wash
Direct T5/T5HO

Type:

Project:


SPECIFICATIONS

Recessed

LWR9

LAMPING OPTIONS


□ LWR9 - 1 2'




2'



□ LWR9 - 1 4'



4'



SPECIFICATIONS

Construction

Housing is formed, pre-finished steel. Four-stage, iron-phosphate pretreatment ensures superior paint adhesion and rust resistance. Painted parts are finished with low-gloss baked enamel.

Reflectors

Specular asymmetric reflector system. Black perforated metal diffuser with round holes.

Electrical

Specify 120V, 277V, or 347V. For special circuits, consult factory. UL and C-UL listed (non-IC).

Luminaire Size

Nominal 2 1/2" aperture. 2' and 4' lengths available.

CATALOG NUMBER

LWR9-G-1-14T5-LDL-U4-277-DMHL3D-LP841-C200

Examples: LWR9 G 1 54T5HO HOL U4 120 GEB10 L/LP C200 — LWR9 G 1 14T5 HOL U2 277 GEB10 LP835 C201

Luminaire	Ceiling Type	# of Lamps in Cross Section	Lamp Type	Shielding	Luminaire Row Length	Voltage	Ballast Type
LWR9	G Lay in grid	1	24T5HO 2' 24W T5HO 54T5HO 4' 54W T5HO 14T5 2' 14W T5 28T5 4' 28W T5	HOL Black metal diffuser with round holes	U2 2' U4 4'	120 277 347	GEB10 <10% THD Electronic ADEZ ^{1,2} Advance Mark 10 dim DMHL3D ^{1,3} Lutron Hi-Lume dim ADZT ^{1,3} Advance Mark 7 0-10V dim OSDIM ^{1,2} Osram 0-10V dim <i>Reference Ballast Wizard on website or consult factory for other options.</i>

Emergency Type	Lamp Color	Finish	Options
EL ^{1,3} Emergency battery pack	L/LP No lamp LP830 3000K 80+ CRI LP835 3500K 80+ CRI LP841 4100K 80+ CRI Available with 28T5 only: LP830P 3000K 80+ CRI Premier LP835P 3500K 80+ CRI Premier LP841P 4100K 80+ CRI Premier <i>Reference Lamp Chart on website or consult factory for other options.</i>	C200 White (low gloss) C201 Black (low gloss)	CP Chicago plenum FLNGW Flange kit (dry wall only) white FLNGB Flange kit (dry wall only) black GLR Fusing (fast blow) GMF Fusing (slow blow) NYC New York City code

Notes:

- 1 Not available in 347V
- 2 Only available with 54T5HO
- 3 Only available with 28T5 and 54T5HO

2246 5th Street, Berkeley, CA 94710 • Tel: 510.845.2760 • Fax: 510.845.2776 • Email: techsupport@peerlesslighting.com • PeerlessLighting.com

Lightline® Recessed Wall-Wash

Direct T5/T5HO


Type:

Project:


Recessed

LWR9

PHOTOMETRICS Actual performance may differ as a result of end-user environment and application.




1-LAMP 24W T5HO
59.2% efficiency
1303 delivered lumens
0.0% up / 100.0% down



1-LAMP 54W T5HO
62.8% efficiency
3138 delivered lumens
0.0% up / 100.0% down


Appendix B - Photometric Calculations

Lobby

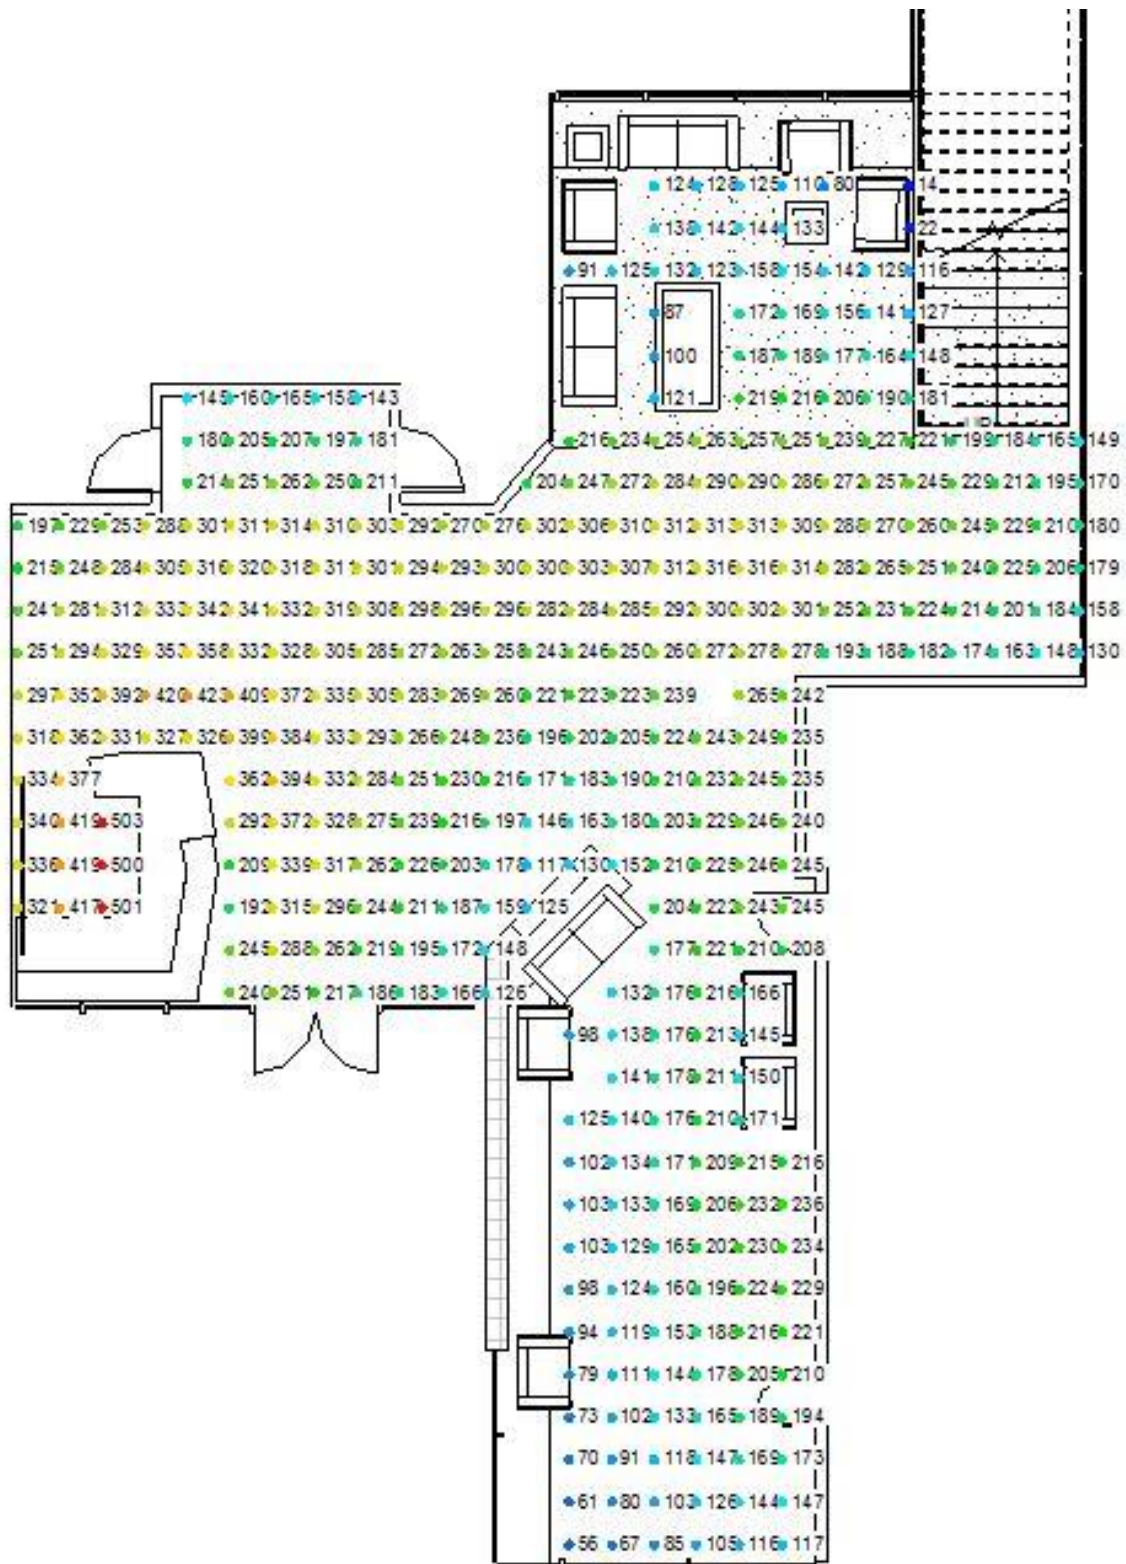



Main DNA Lab

ElumTools Analysis (Ix)

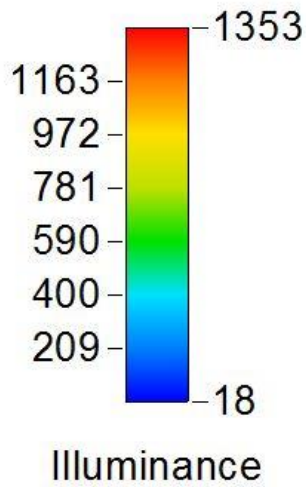


Multipurpose Room

ElumTools Analysis (Ix)

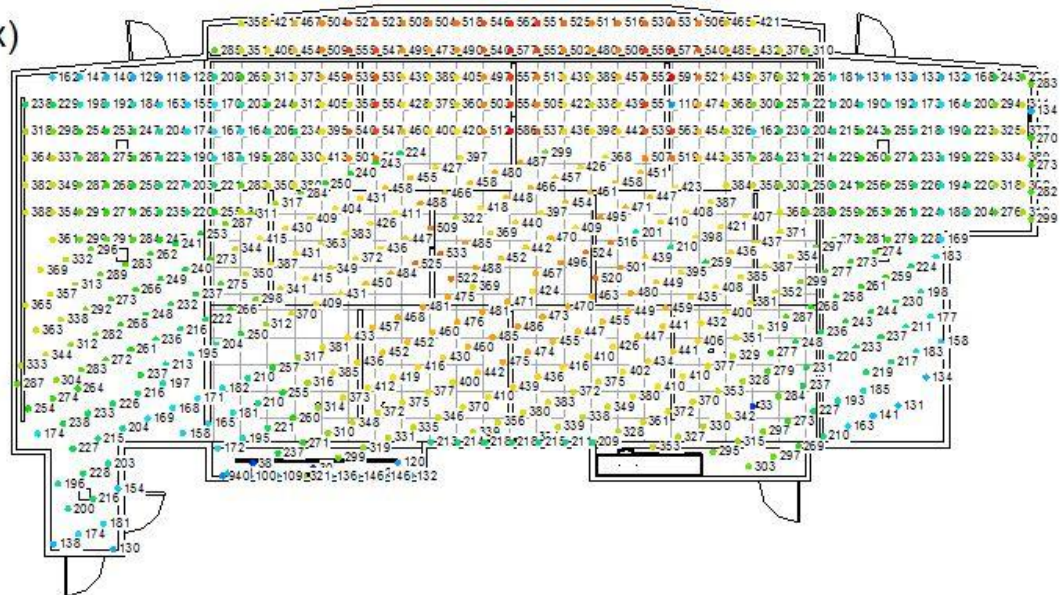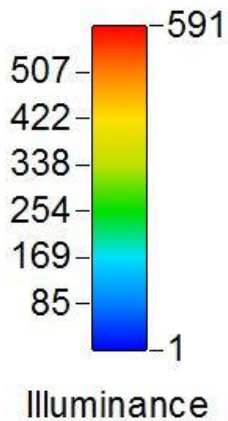

South Plaza

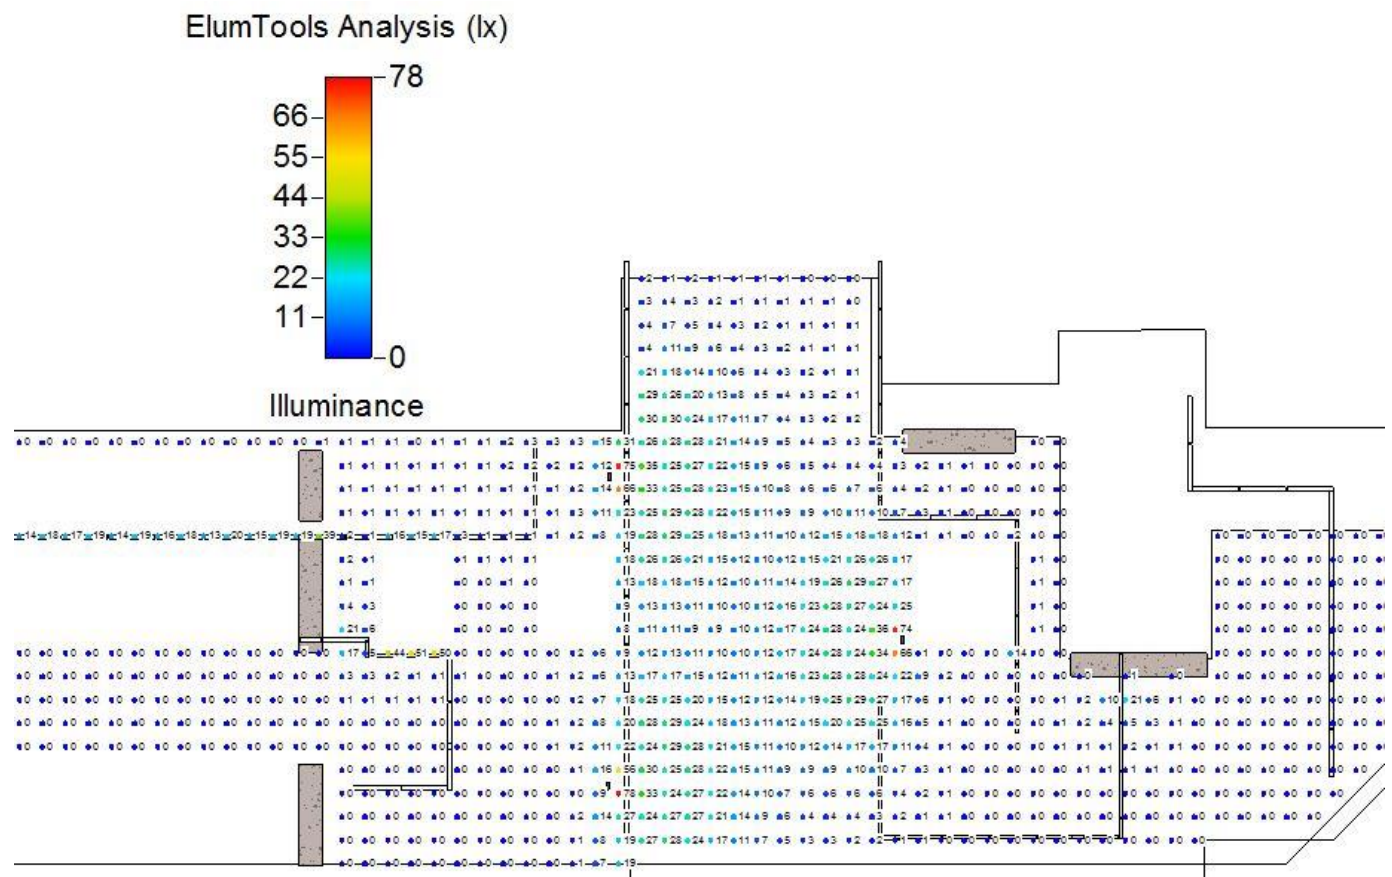

Appendix C - Lamps, Ballasts, Drivers, and Sensors






Lamps

Fixtures PF1, RF1, RF2

PENTRON® T5 FLUORESCENT LAMPS

PENTRON® T5 lamps are designed to operate on dedicated electronic programmed rapid start (also known as programmed start) ballasts only. These lamps are globally standardized and are designed to operate with their peak light output at 35°C (95°F) ambient temperature. For comparison purposes and to accommodate existing lamp measurement standards, ratings are given at both 25°C (77°F) and 35°C (95°F). The new lamp dimensions allow for innovative fixture designs and improved fixture performance.









PENTRON® High Performance T5 Lamps

Nominal Wattage	Bulb	Nominal Length (in)	MOL (in)	Base	Product Number	Ordering Abbreviation	Pkg Qty	Avg Rated Life @3hrs/start (@12hrs/start)	CCT (K)	CRI	Approx Lumens Initial @25°C/77°F	Approx Lumens Mean @35°C/95°F	Symbols & Footnotes
28	T5	48	45.8	Mini Bipin	20868	FP28/830/ECO	40	20000	3000	85	2600	2418	 15,31,33,38,48,74
					20901	FP28/835/ECO	40	20000	3500	85	2600	2418	 15,31,33,38,48,74
					20902	FP28/841/ECO	40	20000	4100	85	2600	2418	 15,31,33,38,48,74
					22203	FP28/850/ECO	40	20000	5000	85	2545	2367	 15,31,33,38,48,74
					20990	FP28/865/ECO	40	20000	6500	85	2400	2232	 15,31,33,38,48,74
					20977	FP28RED 40/CS 1/SKU	40	20000			2100		15,31,33,38,48,74
					20978	FP28GREEN 40/CS 1/SKU	40	20000			3500		15,31,33,38,48,74
					20986	FP28BLUE 40/CS 1/SKU	40	20000			700		15,31,33,38,48,74

Fixture PF2

PENTRON® T5 FLUORESCENT LAMPS

PENTRON® High Output, High Performance T5 Lamps

Nominal Wattage	Bulb	Nominal Length (in)	MOL (in)	Base	Product Number	Ordering Abbreviation	Pkg Qty	Avg Rated Life @3hrs/start (@12hrs/start)	CCT (K)	CRI	Approx Lumens Initial @25°C/77°F	Approx Lumens Mean @35°C/95°F	Symbols & Footnotes
54	T5	48	45.8	Mini Bipin	20903	FP54/830/HO/ECO	40	25000 (35000)	3000	85	4450	4138	 15,31,33,38,48,74
					20904	FP54/835/HO/ECO	40	25000 (35000)	3500	85	4450	4138	 15,31,33,38,48,74
					21020	FP54/835/HO/ECO/SL	40	25000 (35000)	3500	85	4316	4014	 15,31,33,38,48,74
					20906	FP54/841/HO/ECO	40	25000 (35000)	4100	85	4450	4138	 15,31,33,38,48,74
					21021	FP54/841/HO/ECO/SL	40	25000 (35000)	4100	85	4316	4014	 15,31,33,38,48,74
					20949	FP54/850/HO/ECO	40	25000 (35000)	5000	85	4375	4069	 15,31,33,38,48,74
					21022	FP54/850/HO/ECO/SL	40	25000 (35000)	5000	85	4243	3946	 15,31,33,38,48,74
					20862	FP54/865/HO/ECO	40	25000 (35000)	6500	85	4050	3766	 15,31,33,38,48,74
					20997	FP54/RED/HO	40	20000				3300	15,31,33,38,48,74
					20998	FP54/GREEN/HO	40	20000				5550	15,31,33,38,48,74
					20999	FP54/BLUE/HO	40	20000				1150	15,31,33,38,48,74

Lamps

Fixture WW1

PENTRON® T5 FLUORESCENT LAMPS

PENTRON® T5 lamps are designed to operate on dedicated electronic programmed rapid start (also known as programmed start) ballasts only. These lamps are globally standardized and are designed to operate with their peak light output at 35°C (95°F) ambient temperature. For comparison purposes and to accommodate existing lamp measurement standards, ratings are given at both 25°C (77°F) and 35°C (95°F). The new lamp dimensions allow for innovative fixture designs and improved fixture performance.

PENTRON® High Performance T5 Lamps

Nominal Wattage	Bulb	Nominal Length (in)	MOL (in)	Base	Product Number	Ordering Abbreviation	Pkg Qty	Avg Rated Life @3hrs/start (@12hrs/start)	CCT (K)	CRI	Approx Lumens Initial @25°C/77°F	Approx Lumens Mean @35°C/95°F	Symbols & Footnotes
28	T5	48	45.8	Mini Bipin	20868	FP28/830/ECO	40	20000	3000	85	2600	2418	31, 33, 38, 48, 74, 76
					20901	FP28/835/ECO	40	20000	3500	85	2600	2418	31, 33, 38, 48, 74, 76
					20902	FP28/841/ECO	40	20000	4100	85	2600	2418	31, 33, 38, 48, 74, 76
					22203	FP28/850/ECO	40	20000	5000	85	2545	2367	31, 33, 38, 48, 74, 76
					20990	FP28/865/ECO	40	20000	6500	85	2400	2232	31, 33, 38, 48, 74, 76
					20977	FP28RED 40/CS 1/SKU	40	20000			2100		15, 31, 33, 38, 48, 74
					20978	FP28GREEN 40/CS 1/SKU	40	20000			3500		15, 31, 33, 38, 48, 74
					20986	FP28BLUE 40/CS 1/SKU	40	20000			700		15, 31, 33, 38, 48, 74
14	T5	24	22.2	Mini Bipin	20907	FP14/830/ECO	40	20000	3000	85	1200	1116	31, 33, 38, 48, 74, 76
					20908	FP14/835/ECO	40	20000	3500	85	1200	1116	31, 33, 38, 48, 74, 76
					20914	FP14/841/ECO	40	20000	4100	85	1200	1116	31, 33, 38, 48, 74, 76
					20988	FP14/865/ECO	40	20000	6500	85	1100	1045	31, 33, 38, 48, 74, 76

Ballasts

Fixtures RF1, RF2

QUICKTRONIC PROFESSIONAL T5 PROStart PSN UNIVERSAL VOLTAGE SYSTEMS

NORMAL BALLAST FACTOR³

49181	QTP 2x28T5/UNV PSN NL	120-277	0.55/0.23	FP28T5	2900	2	1.00	5800	65/63	89/92
(49180)*						1	1.00	2900	32	90

PROStart® QTP PSN models above also operate these lamps: FP14, FP21 & FP35

* (Item Number) = Item Number/NAED in parentheses are models with leads/wires.

Fixture PF2

QUICKTRONIC PROFESSIONAL HELIOS 54 T5 HO DIMMING SYSTEMS³ - A list of controllers is available from OSRAM SYLVANIA

(0-10Vdc control) - 100-1% Dimming Range - <10% THD

49671	QT1x54/120PHO-DIM	120	0.54	FP54T5HO	5000	1	1.00	5000	62	81
							0.01	50	8	
49672	QT1x54/277PHO-DIM	277	0.23	FP54T5HO	5000	1	1.00	5000	61	82
							0.01	50	8	
49673	QT2x54/120PHO-DIM	120	1.07	FP54T5HO	5000	2	1.00	10000	120	83
							0.01	100	18	
49674	QT2x54/277PHO-DIM	277	0.45	FP54T5HO	5000	2	1.00	10000	117	85
							0.01	100	18	

QUICKTRONIC® POWERSENSE® T5 Dimming UNV Systems

High Efficiency Series

POWERSENSE
T5 DIM

Lamp / Ballast Guide

28W T5 - PENTRON® lamps

Primary Lamp Type

Also operates:

Key System Features

- Industry's first ballast that combines dimming inputs from 0-10V and/or two-wire AC dimming providing maximum flexibility
- POWERSENSE compatibility with low voltage and power line fluorescent dimmers
- High Efficiency**
- Lamp Detection Technology
- Universal voltage (120-277V)
- 100-1% Dimming Range
- PROStart® programmed rapid start
- Anti-flash circuitry – turns on in dimmed mode
- Lightweight and low profile
- Operates at >42 kHz
- QUICKSENSE ballast technology (end-of-lamp-life sensing)
- QUICK 60+ ballast and lamp warranty
- RoHS compliant
- Lead-free solder and manufacturing process



Application Information

SYLVANIA QUICKTRONIC POWERSENSE ballasts

are ideally suited for:

- Occupancy sensors
- Daylight harvesting
- Energy management
- Load shedding
- Commercial
- Retail
- Hospitality
- Institutional
- Schools
- New construction
- Retrofit

SYLVANIA QUICKTRONIC High Efficiency POWERSENSE T5 electronic ballasts offer several advantages:

- Wide Dimming Range:** operate linear fluorescent T5 PENTRON lamps over a 100-1% dimming range and provide true versatility in controls selection.
- Industry's Most Adaptable Dimming Ballast:** ballasts feature micro-controller technology for compatibility with:
 - low voltage controls
 - power line fluorescent dimmers
 - any line voltage from 120V to 277V
- Unmatched Performance with Patented Lamp Detection Technology:**
 - Eliminates variations in brightness from lamp-to-lamp
 - Provides uniform lighting throughout the dimming range
 - Eases installation and troubleshooting by recognizing failed lamps, faulty wiring or loose connections and shutting down.

System Information

QUICKTRONIC POWERSENSE ballasts operate from standard low voltage (0-10VDC) fluorescent controllers or compatible 2-wire power line fluorescent dimmers, making them ideal for individual office lighting or automated building applications, both in new construction and retrofit projects.

For the individual office or conference room, installation can be streamlined by using a 2-wire power line dimmer; eliminating the need for additional control wires.

For more advanced systems, such as daylight harvesting or building automation applications, standard low voltage devices (0-10VDC, Class 1 or 2) are used to control the lighting system. In this daylight harvesting example, each lighting fixture (or fixture row) is controlled by it's own photosensor; regulating the light output to compensate for changes in natural daylight. Depending upon the specific application, energy savings of up to




Fluorescent Controllable Lighting Systems



When the problem is corrected, the system restarts automatically.

RoHS Compliant: QUICKTRONIC POWERSENSE T5 ballasts are RoHS compliant and feature lead-free solder and manufacturing process.


QUICK 60+® Warranty: Setting the standard for quality, QUICKTRONIC POWERSENSE T5 ballasts are covered by a QUICK 60+® warranty, the first comprehensive system warranty in the industry.

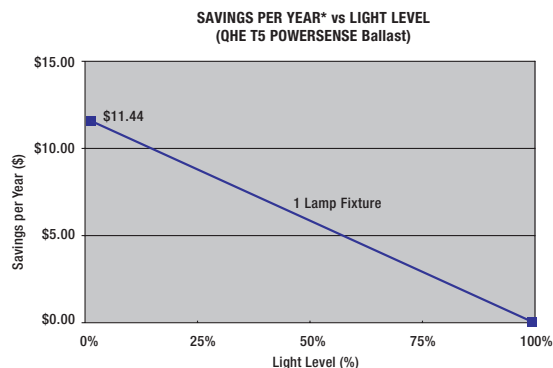

* FP28 lamps with QUICKTRONIC QHE T5 POWERSENSE ballast
* Based on 4000 hrs/yr, \$0.11/kWh, and 120V operation
* Savings per Year (@Light Level) = Cost of operation (100% Light Level) - Cost of operation (@Light Level)

60% compared to fixed output electronic systems can be realized.

All QUICKTRONIC POWERSENSE ballasts include a line voltage protection circuit, which protects the ballast in the event that line voltage is inadvertently applied to the low voltage control inputs.

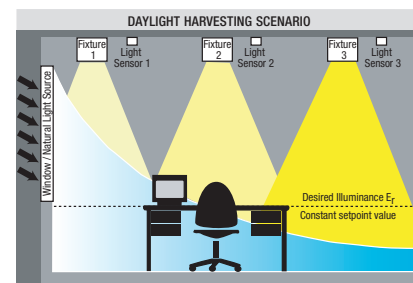

SPECIFICATION DATA

Catalog # Date Type

Project Prepared by

Comments


POWERSENSE

High Efficiency


QUICKTRONIC® POWERSENSE® Dimming UNV – Dimming Control Wiring Examples

Industry's 1st Ballast That Allows POWERLINE Fluorescent Control **AND** 0-10Vdc Control Input Simultaneously

2-wire Powerline **AND** 0-10Vdc Control with POWERSENSE Ballasts

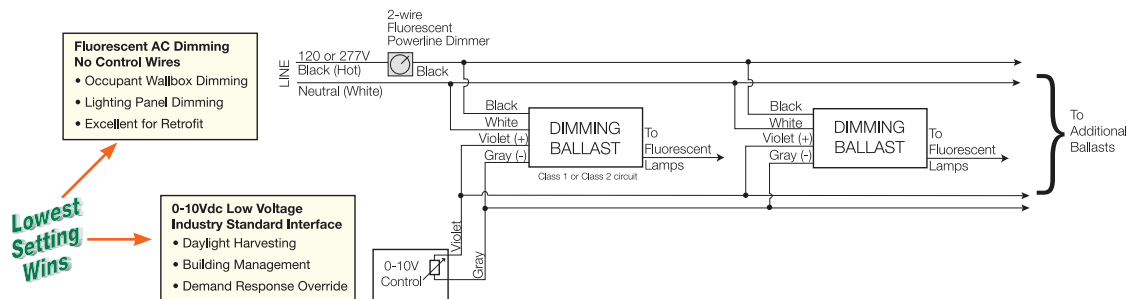

Wallbox Style 2-wire Powerline Control Wiring Example

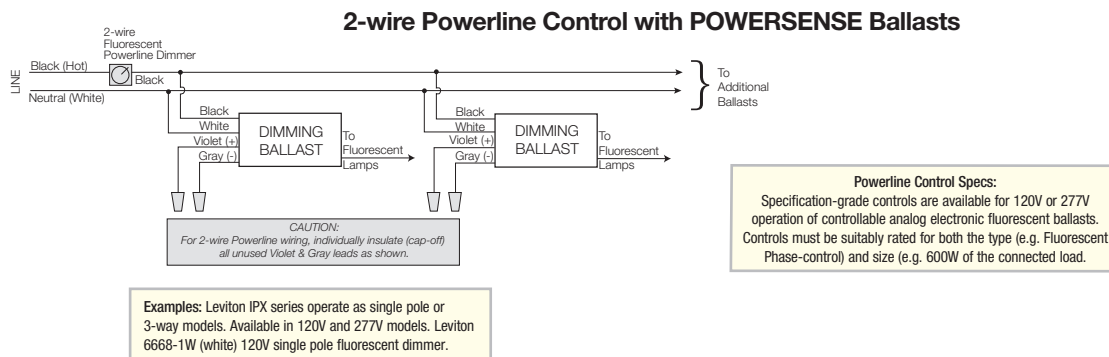

Wallbox Style 0-10V Control with Power Switch Wiring Example

0-10V DC Control with POWERSENSE Ballasts


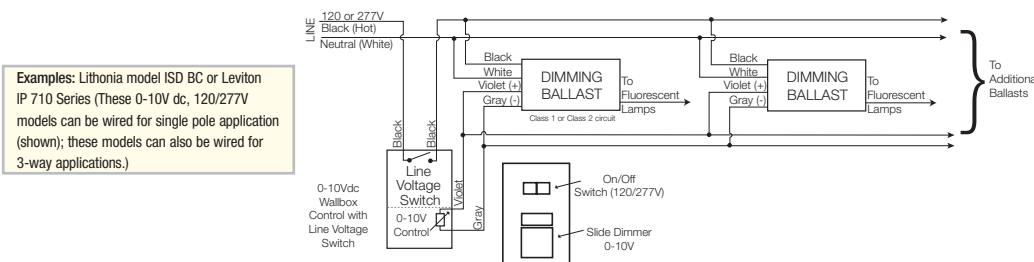


Photo Sensor 0-10V Wiring Example

0-10V DC Control with POWERSENSE Ballasts

Photo Sensor 0-10V Wiring Example

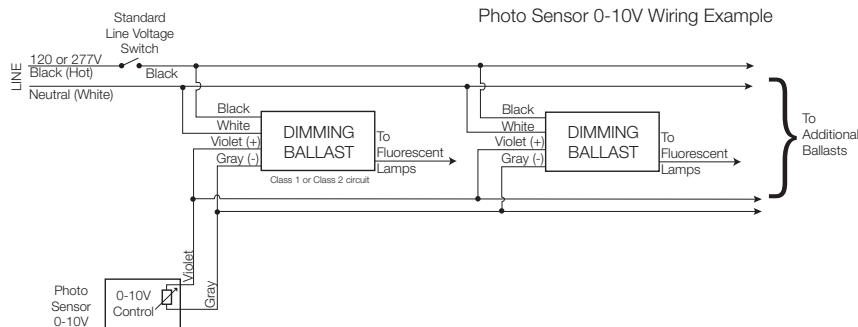

SPECIFICATION DATA

Catalog # Date Type

Project Prepared by

Comments

QUICKTRONIC® POWERSENSE® Controls Information



Controls Manufacturer	Fluorescent Powerline Controllers	0-10 VDC Controllers	Photo Cells	Occupancy Sensors	Building Management Systems
Acuity Brand Controls www.acuitybrandscontrols.com	X	X	X	X	X
Blue Ridge Technologies www.brint.com	X	X	X	X	X
Cooper Greengate http://greengate.coopercontrol.com		X	X	X	X
Hunt Dimming www.huntdimming.com	X	X			X
Lehigh Electric Products www.lehighdim.com	X	X			X
Leviton www.leviton.com	X	X	X	X	
Sensor Switch www.sensorswitch.com			X	X	
Siemens Building Technology http://sbt.siemens.com					X
Starfield Controls www.starfieldcorp.com		X	X	X	X
Watt Stopper www.wattstopper.com	X	X	X	X	X

Please contact controls manufacturer to order/specify controls. For the latest controls list go to www.sylvania.com
Also, for more information, refer to the LCA (Lighting Controls Association) site: <http://lightingcontrolsassociation.org>

Dimensions:

TC enclosure


Overall: 9.5" L x 1.68" W x 1.0" H (241 x 43 x 25 mm)

Mounting: 8.90" (226 mm)

Weight: 1.1 lbs each (500 g)

Wiring:

Leads Only

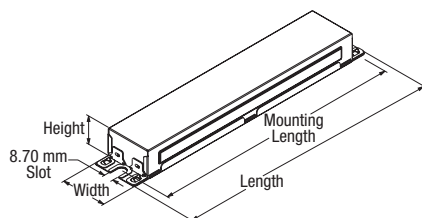

Dimensions:

TCL enclosure


Overall: 16.7" L x 1.68" W x 1.0" H (425mm x 43mm x 25mm)

Mounting: 16.2" (411 mm)

Weight: 2.1 lbs each (950 g)

Wiring:

Leads Only

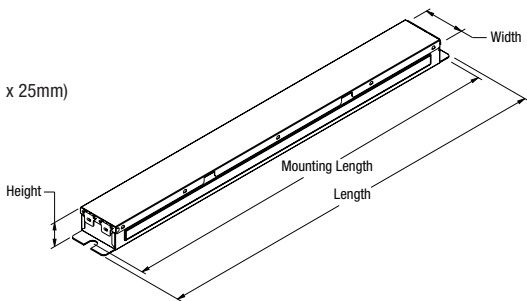

POWERSENSE

High Efficiency

Controls Guide

Contact the companies listed for their 2-wire Fluorescent/Powerline controls and/or 0-10V controls information.

T8 POWERSENSE Dimming Ballast*
50705 QHE 1x32T8/UNV DIM-TC
50707 QHE 2x32T8/UNV DIM-TC
50714 QHE 3x32T8/UNV DIM-TCL
50716 QHE 4x32T8/UNV DIM-TCL

T5 POWERSENSE Dimming Ballast
50725 QHE 1x28T5/UNV DIM-TC
50726 QHE 2x28T5/UNV DIM-TCL*

T5HO POWERSENSE Dimming Ballast
51468 QHE 1x54T5HO/UNV DIM-TC
51467 QHE 2x54T5HO/UNV DIM-TCL

* QHE formerly QTP models

WARNING:

Install and wire these ballast and controls in accordance with the National Electrical Code (NEC), all applicable Federal, State and local electrical codes, as well as the specific instructions provided with the compatible control that you purchased. Installation should be performed by qualified personnel only.

These instructions are guidelines only. Installation may vary for different controls/fixtures/applications. Be sure to follow the control instructions and all applicable codes and standards when installing dimming systems.

Please contact controls manufacturer listed in the OSRAM SYLVANIA Inc. controls cross reference for compatible controls and instruction wiring

NOTES: 1. Dimming ballasts source <0.5mA (0-10VDC control input).

2. Powerline controls must be rated for the type (e.g. Fluorescent Phase-control) and size (e.g. 600W, 1000W, 1500W & 2000W etc.) of the connected load. Do NOT use incandescent powerline controls; incandescent dimmers are not rated for fluorescent loads and are NOT compatible with POWERSENSE ballasts.

OSRAM SYLVANIA
National Customer
Service and Sales Center
1-800-LIGHTBULB
(1-800-544-4828)
www.sylvania.com

Control Specifications/model numbers may change.

Please consult manufacturers listed for their latest control models and to order their controls.



SPECIFICATION DATA

Catalog #	Date	Type
Project	Prepared by	
Comments		

High Efficiency Electronic T5 Fluorescent Controllable Lighting Systems




Item Number	OSRAM SYLVANIA Description	Input Current (AMPS)	Lamp Type	Rated ¹ Lumens (lm)	No. of Lamps	Ballast Factor (BF)	System Lumens	Input ² Power (W) 120V 277V	System Efficacy (lm/W)	BEF ³
50725	QHE1x28T5/UNV DIM-TCL	0.27/0.12	FP28T5	2900	1	1.00 0.01	2900 29	32 31 6 6	94	3.23
		0.34/0.14	FP35T5	3650	1	1.00 0.01	3650 37	41 40 6 6	91	2.50
		0.21/0.09	FP21T5	2100	1	1.00 0.01	2100 21	25 25 6 6	84	4.00
		0.14/0.06	FP14T5	1350	1	1.00 0.01	1350 14	17 17 5 5	79	5.88
50726	QHE2x28T5/UNV DIM-TCL*	0.53/0.23	FP28	2900	2	1.00 0.01	5800 58	64 62 10	91/93	1.61
		0.67/0.29	FP35	3650	2	1.00 0.01	7300 73	81 79 10	90/92	1.27
		0.40/0.18	FP21	2100	2	1.00 0.01	4200 42	49 9	86	2.04
		0.29/0.13	FP14	1350	2	1.00 0.01	2700 27	34 8	79	2.94

1 At 35°C lamp ambient temperature.
2 System Efficacy calculation based on lowest input power.
3 Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power (note: calculation based on lowest wattage value)
⚡ Preliminary specifications. Please contact OSRAM SYLVANIA for additional information.
*Please note, item number 50726 was formerly QTP 2x28T5/UNV DIM-TCL



Installation Notes

Output Wiring: Lamp wiring for dimming ballasts can differ significantly from non-dimming ballasts and from other manufacturers dimming ballasts. Take care to connect lamp lead wires as shown on

the applicable ballast diagram. **Lamp Seasoning:** For optimal performance, fluorescent lamps may require seasoning for up to 12 hours prior to low temperature starting & low level dimming. Refer to NEMA LSD 23-2002 Lighting Systems Division: Recommended Practice - Lamp Seasoning for Fluorescent Dimming Systems

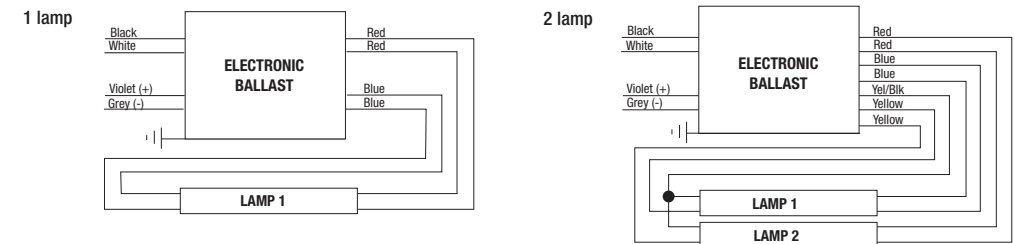

Input & Control Wiring Options:



Item Number ————— 50726 QHE 2 x 28T5 / UNV DIM-TCL ————— System Type - DIMMING/Case Size
QUICKTRONIC High Efficiency ————— Line Voltage (120-277V)
Number of Lamps (2) ————— Primary Lamp Wattage

T5 POWERSENSE®
High Efficiency

Performance Guide

Data shown based upon SYLVANIA PENTRON® lamp(s). QUICKTRONIC® POWERSENSE ballasts are also compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications.

Specifications
Data based on FP28

Starting Method: Programmed Rapid Start
Circuit Type: Series
Lamp Frequency: >42 kHz
Lamp CCF: Less than 1.7
Starting Temp: 50°F/10°C minimum[®]
Input Voltage: 120-277V, ±10%
Input Frequency: 50/60 Hz
THD: <10% @ Full Output
Power Factor: >98% @ Full Output

UL Listed Class P, Type 1 Outdoor
CSA or C/UL Certified
70°C Max Case Temperature
FCC 47CFR Part 18 Non-Consumer
Class A Sound Rating
RoHS Compliant[†]
ANSI C62.41 Cat. A Transient Protection
No Remote or Tandem Wiring
4 Complies with European Union Restriction of Hazardous Substances Directive.
5 FP14 lamp starting temperature 60°F (16°C)

Control Information

QUICKTRONIC POWERSENSE ballasts are compatible with a wide range of low voltage (0-10VDC) and power line fluorescent controllers available from various manufacturers.
Low Voltage Control Specs: Ballast will source up to 0.5mA for 0-10VDC control purposes. May be wired as a Class 1 or Class 2 circuit-consult Local and National Electrical Codes.
Power Line Control Specs: Specification-grade fluorescent controls are available for 120V or 277V operation of controllable analog electronic fluorescent ballasts. Controls must be suitably rated for both the type (e.g. Fluorescent Phase-control) and size (e.g. 600W) of the connected load.

System Life / Warranty

QUICKTRONIC products are covered by the QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

OSRAM SYLVANIA
National Customer
Service and Sales Center
1-800-LIGHTBULB
(1-800-544-4828)
www.sylvania.com

Specifications subject to change without notice.

Highest performance dimming to 1 % 3-wire controlled



Shown above: Hi-lume ballast, A-case

Model numbers are organized by lamp type, refer to pg. 349 for additional information.

Experience the benefits of full-range, 100% to 1% fluorescent dimming. Designed to meet the most demanding lighting requirements, Hi-lume ballasts enable you to provide the ideal visual environment for any application. The Hi-lume family is extensive, featuring the world's only 100% to 1% dimming ballasts for T4 compact fluorescent lamps. Integrating Hi-lume 1% technology into your designs affords you full control over the lighting in any space.

Operating voltage

- 120V or 277V @ 60Hz

Lamp types and wattages

- T5 HO: 24W, 39W, 54W
- T4 4-pin triple-tube CFL: 26W, 32W

Control options

- 3-wire control

Available case types

- A-case
- C-case

Key standards

- California Energy Commission Listed
- UL Listed (evaluated to the requirements of UL 935)
- CSA certified (evaluated to the requirements of C22.2 No. 74)
- MIL Std. 461E compliant (meets the requirements of CE101, RE101 and RE102)
- Meets FCC Part 18 Non-Consumer requirements for EMI/RFI emissions

[Download specification submittal](#)

Features

- Continuous, flicker-free dimming from 100% to 1%
- Ballasts maintain consistent light output for different lamp lengths, ensuring fixture-to-fixture uniformity
- 3-wire line voltage control for consistent fixture-to-fixture dimming
- Sensors cannot connect directly to Hi-lume ballasts
- Line-voltage miswire protection
- Slim-profile design
- Lamps turn on at any dimmed level without going to full brightness
- 100% performance-tested, including burn-in at the factory

Specifications

- Total Harmonic Distortion (THD): less than 10%
- Power factor greater than 0.95
- Ballast factor equal to 0.95 for T4 lamps
- Ballast factor equal to 1.0 for T5 HO lamps

Environment

- Sound rating: Class A
- Minimum lamp starting temperature 10°C (50°F)
- Maximum ballast case temperature 75°C (167°F)

Mounting

- Ballast mounts using two screws (or sheet metal feature and one screw) within a fluorescent fixture
- Ballast is grounded via a mounting screw to the fixture
- Lutron® and NEMA® recommend sockets complying with IEC 60400. Sockets must have a UL mark as well. Use rapid start sockets, not instant start sockets.
- Terminals accept 16-18AWG (0.75 to 1.5 mm²) solid copper or tinned stranded wire

Wiring

- Hi-lume ballasts require three wires plus Ground (Dimmed Hot, Switched Hot and Neutral); one 16-18AWG solid copper Class 1 wire per terminal
- Maximum ballast-to-lamp-socket lead length is 7 ft (2 m) for T5 HO linear lamps, and 3 ft (1 m) for T4 compact lamps
- Ballast is grounded via case

QUICKTRONIC® POWERSENSE® T5HO UNV Dimming Systems



**Fluorescent Controllable
Lighting Systems**

High Efficiency Series

Lamp / Ballast Guide

54W T5HO - PENTRON® lamps*
1-lamp QHE1x54T5HO/UNV DIM TC
2-lamp QHE2x54T5HO/UNV DIM TCL

Also operates:

FT55DL, FPC55 and L58T8

* Not to be used with Energy Saving
T5HO lamps

Key System Features

- Industry's first ballast that combines dimming inputs from 0-10V and/or two-wire AC dimming providing maximum flexibility
- POWERSENSE compatibility with low voltage and power line fluorescent dimmers
- High Efficiency**
- Lamp Detection Technology
- Universal voltage (120-277V)
- 100-1% Dimming Range
- PROStart® programmed rapid start
- Anti-flash circuitry – turns on in dimmed mode
- Operates at >42kHz
- QUICKSENSE ballast technology (end-of-lamp-life sensing)
- QUICK 60+ ballast and lamp warranty
- RoHS compliant
- Lead-free solder and manufacturing process



Application Information

SYLVANIA QUICKTRONIC POWERSENSE ballasts

are ideally suited for:

- Occupancy sensors
- Daylight harvesting
- Energy management
- Load shedding
- Commercial
- Retail
- Hospitality
- Institutional
- Schools
- New construction
- Retrofit

SYLVANIA QUICKTRONIC High Efficiency POWERSENSE T5HO electronic ballasts offer several advantages:

- Wide Dimming Range:** operate linear fluorescent PENTRON HO, PENTRON HO Circline, and DULUX LT5 lamps over a 100-1% dimming range and provide true versatility in controls selection.
- Industry's Most Adaptable Dimming Ballast:** ballasts feature micro-controller technology for compatibility with:
 - low voltage controls
 - power line fluorescent dimmers
 - any line voltage from 120V to 277V
- Unmatched Performance:** patented lamp detection technology that virtually eliminates variations in brightness from lamp-to-lamp and provides uniform lighting throughout the dimming range. This technology also eases installation and troubleshooting by recognizing failed lamps, faulty wiring or loose connections, and shutting down.



When the problem is corrected, the system restarts automatically.

RoHS Compliant: QUICKTRONIC POWERSENSE T5HO ballasts are RoHS compliant and feature lead-free solder and manufacturing process

QUICK60+® Warranty: Setting the standard for quality, QUICKTRONIC POWERSENSE T5HO ballasts are covered by a QUICK60+® warranty, the first comprehensive system warranty in the industry

System Information


QUICKTRONIC POWERSENSE ballasts operate from standard low voltage (0-10VDC) controllers or compatible 2-wire power line fluorescent dimmers, making them ideal for individual office lighting or automated building applications, both in new construction and retrofit projects.

For the individual office or conference room, installation can be streamlined by using a 2-wire power line fluorescent dimmer; eliminating the need for additional control wires.


For more advanced systems, such as daylight harvesting or building automation applications, standard low voltage devices

(0-10VDC, Class 1 or 2) are used to control the lighting system. In this daylight harvesting example, each lighting fixture (or fixture row) is controlled by its own photosensor; regulating the light output to compensate for changes in natural daylight. Depending upon the specific application, energy savings of up to 60% compared to fixed output electronic systems can be realized.

All QUICKTRONIC POWERSENSE ballasts include a line voltage protection circuit, which protects the ballast in the event that line voltage is inadvertently applied to the low voltage control inputs.

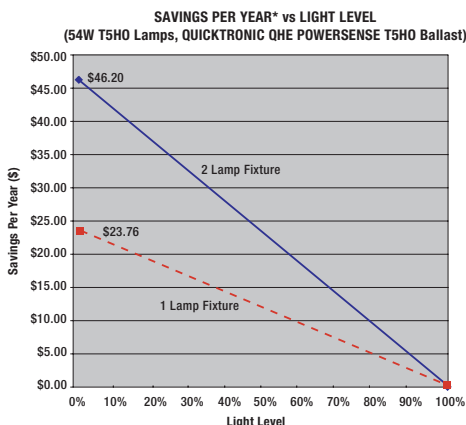

*Based on 4000 hrs/yr, \$0.11/kWh, and 120V operation
*Savings per Year (@Light Level) = Cost of operation (100% Light Level) – Cost of operation (@Light Level)

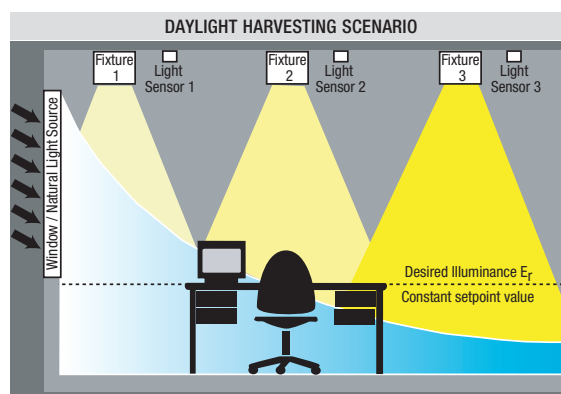

SPECIFICATION DATA

Catalog #	Date	Type
Project	Prepared by	
Comments		

QUICKTRONIC® POWERSENSE® Controls Information



Controls Manufacturer	Fluorescent Powerline Controllers	0-10 VDC Controllers	Photo Cells	Occupancy Sensors	Building Management Systems
SYLVANIA www.sylvania.com/controls	X	X	X	X	X
Acuity Brand Controls www.acuitybrandscontrols.com	X	X	X	X	X
Blue Ridge Technologies www.brtint.com	X	X	X	X	X
Cooper Greengate http://greengate.coopercontrol.com		X	X	X	X
Hunt Dimming www.huntdimming.com	X	X			X
Lehigh Electric Products www.lehighdim.com	X	X			X
Leviton www.leviton.com	X	X	X	X	
Sensor Switch www.sensorswitch.com			X	X	
Siemens Building Technology http://sbt.siemens.com					X
Starfield Controls www.starfieldcorp.com		X	X	X	X
Watt Stopper www.wattstopper.com	X	X	X	X	X

Please contact controls manufacturer to order/specify controls. For the latest controls list go to www.sylvania.com
Also, for more information, refer to the LCA (Lighting Controls Association) site: <http://lightingcontrolsassociation.org>

Dimensions:

1 lamp enclosure


Overall: 9.5" L x 1.68" W x 1.0" H (241 x 43 x 25 mm)

Mounting: 8.90" (226 mm)

Weight: 1.1 lbs each (500 g)

Wiring:

Leads Only

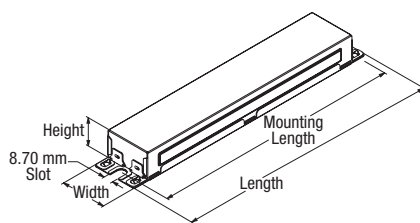

Dimensions:

2 lamp enclosure


Overall: 16.7" L x 1.68" W x 1.0" H (425mm x 43mm x 25mm)

Mounting: 16.2" (411 mm)

Weight: 2.1 lbs each (950 g)

Wiring:

Leads Only

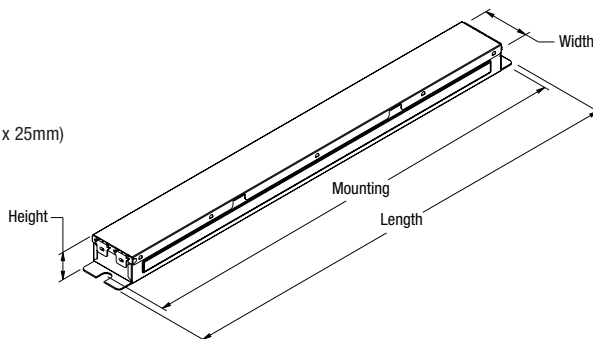

Control Specifications/model numbers may change.
Please consult manufacturers listed for their latest control models and to order their controls.

T5HO POWERSENSE

High Efficiency

Controls Guide



Contact the companies listed for their 2-wire Fluorescent/Powerline controls and/or 0-10V controls information.

T5HO POWERSENSE Dimming Ballast
51468 QHE 1x54T5HO/UNV DIM-TC
51467 QHE 2x54T5HO/UNV DIM-TCL

WARNING:

Install and wire these ballast and controls in accordance with the National Electrical Code (NEC), all applicable Federal, State and local electrical codes, as well as the specific instructions provided with the compatible control that you purchased. Installation should be performed by qualified personnel only.

These instructions are guidelines only. Installation may vary for different controls/fixtures/applications. Be sure to follow the control instructions and all applicable codes and standards when installing dimming systems.

Please contact controls manufacturer listed in the OSRAM SYLVANIA Inc. controls cross reference for compatible controls and instruction wiring

NOTES: 1. Dimming ballasts source <0.5mA (0-10VDC control input).
2. Powerline controls must be rated for the type (e.g. Fluorescent Phase-control) and size (e.g. 600W, 1000W, 1500W & 2000W etc.) of the connected load. Do NOT use incandescent powerline controls; incandescent dimmers are not rated for fluorescent loads and are NOT compatible with POWERSENSE ballasts.

OSRAM SYLVANIA
National Customer
Service and Sales Center
1-800-LIGHTBULB
(1-800-544-4828)
www.sylvania.com


Specifications subject to change without notice.

SEE THE WORLD IN A NEW LIGHT




Industry's 1st Ballast That Allows POWERLINE Fluorescent Control **AND** 0-10Vdc Control Input Simultaneously

2-wire Powerline **AND** 0-10Vdc Control with POWERSENSE Ballasts

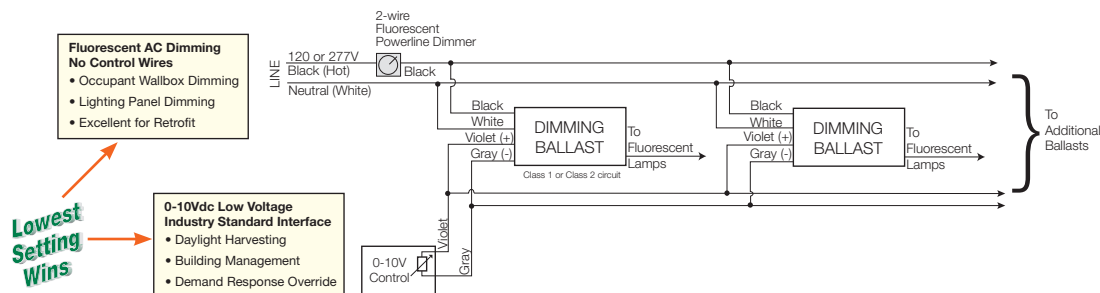

Wallbox Style 2-wire Powerline Control Wiring Example

2-wire Powerline Control with POWERSENSE Ballasts

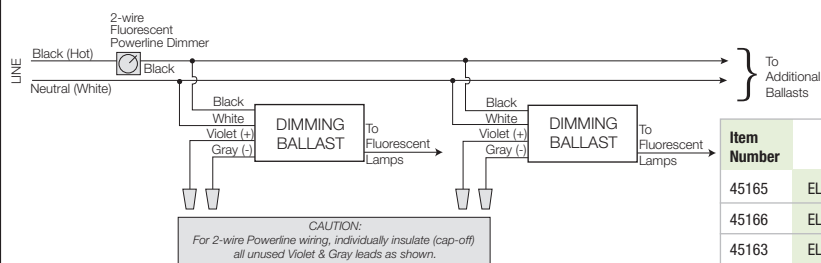

Powerline Control Specs:
Specification-grade controls are available for 120V or 277V operation of controllable analog electronic fluorescent ballasts. Controls must be suitably rated for both the type (e.g. Fluorescent Phase-control) and size (e.g. 600W of the connected load).


ELOGIC™ MANUAL CONTROL SLIDE FLUORESCENT PHASE CUT DIMMER

Item Number	OSRAM SYLVANIA Description	Voltage Rating	Rating	Type	Wiring
45165	ELMC-SL3WHP-FLPCWBX120	120 VAC	1000VA	Fluorescent Phase cut	Single Pole or 3-way
45166	ELMC-SL3WHP-FLPCWBX277	277 VAC	1200VA		
45163	ELMC-SL3WSP-FLPCWBX120	120 VAC	600VA		
45164	ELMC-SL3WSP-FLPCWBX277	277 VAC	600VA		

*For additional information refer to ELOGIC™ Lighting Controls product information bulletins LMS068.

Wallbox Style 0-10V Control with Power Switch Wiring Example

0-10V DC Control with POWERSENSE Ballasts

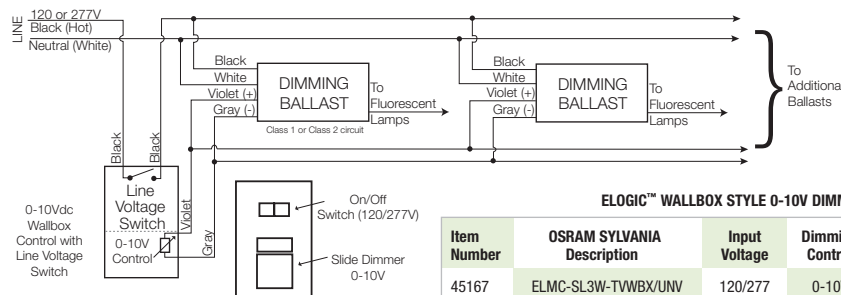


ELOGIC™ WALLBOX STYLE 0-10V DIMMER WITH POWER SWITCH

Item Number	OSRAM SYLVANIA Description	Input Voltage	Dimming Control	Maximum Power Rating	Wiring	Color
45167	ELMC-SL3W-TWVBX/UNV	120/277	0-10V	1200VA @120V 1500VA @277V	Single Pole or 3-way	White

Daylight Harvesting and Occupancy Control Wiring Example

0-10V DC Control with POWERSENSE Ballasts

Photo Sensor 0-10V Wiring Example

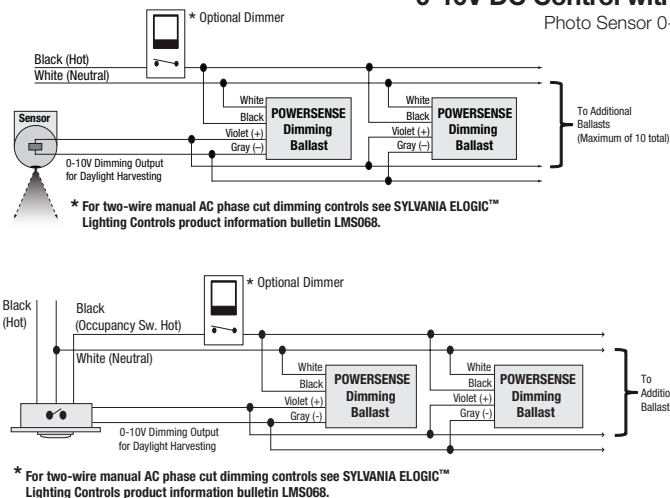

ELOGIC™ DAYLIGHT HARVESTING AND OCCUPANCY CONTROLS ORDERING INFORMATION

Item Number	OSRAM SYLVANIA Description	Function	Occupancy Sensing Method	Control Method	Sensor Power	Mounting Method
45030	ELSC-DLH-TVLAMP/BUS	Daylight Harvesting	N/A	0-10V	From Ballast	To Lamp
45032	ELSC-DLOCIRM-TV1RCEIL/UNV	Daylight Harvesting + Occupancy Sensing	Passive Infrared + Microphonics™	0-10V +	Line voltage 120/277AC	Ceiling
45033	ELSC-DLOCIR-TV1RCEIL/UNV		Passive Infrared			
45034	ELSC-DLOCIRM-TV1RREC/UNV		Passive Infrared + Microphonics™	Power ON/OFF switch	No power pack required	Recessed
45035	ELSC-DLOCIR-TV1RREC/UNV		Passive Infrared			

*For additional information refer to ELOGIC™ Lighting Controls product information bulletins ECS101 and ECS106.

POWERSENSE
T5HO DIM

SPECIFICATION DATA

Catalog #

Date

Type

Project

Prepared by

Comments

High Efficiency, T5HO Controllable Lighting Systems, Universal Voltage (120-277V)

Item Number	OSRAM SYLVANIA Description	Input Current (AMPS)	Lamp ¹ Type	Rated ¹ Lumens (lm)	No. of Lamps	Ballast ¹ Factor (BF)	System ¹ Lumens	Mean ¹ Lumens	Input ¹ Power (W) 120V 277V	System ² Efficacy (lm/W)	BEF ²
51468	QHE1x54T5HO/UNV DIM-TC 10-pack	0.51/0.21	FP54T5HO	5000	1	1.00 0.01	5000 50	4650 45	62 60 8 8	83	1.67
		0.51/0.21	FT55DL	4800	1	1.00 0.01	4800 45	4465 40	62 60 8 8	80	1.67
		0.51/0.21	L58	5200	1	1.00 0.01	5200 50	4835 45	62 60 8 8	87	1.67
		0.51/0.21	FPC55	4000	1	1.00 0.01	4000 40	3725 35	62 60 8 8	67	1.67
51467	QHE2x54T5HO/UNV DIM-TCL 10-pack	1.00/0.42	FP54T5HO	5000	2	1.00 0.01	10,000 100	9300 95	120 116 15 15	86	0.86
		1.00/0.42	FT55DL	4800	2	1.00 0.01	9600 95	8930 90	120 116 15 15	83	0.86
		1.00/0.42	L58	5200	2	1.00 0.01	10,400 105	9670 95	120 116 15 15	90	0.86
		1.00/0.42	FPC55	4000	2	1.00 0.01	8000 80	7440 75	120 116 15 15	69	0.86

1: At 35°C lamp ambient temperature.

2: Ballast Efficiency Factor (BEF) shown = (Ballast Factor x 100) divided by Input Power (Note: calculation based on lowest wattage value).

3: System Efficacy calculation based on lowest input power value.

Installation Notes

Output Wiring: Lamp wiring for dimming ballasts can differ significantly from non-dimming ballasts and from other manufacturers dimming ballasts. Take care to connect lamp lead wires as shown on the applicable ballast diagram.

Lamp Seasoning: For optimal performance, fluorescent lamps may require seasoning for up to 12 hours prior to low temperature starting & low level dimming. Refer to NEMA LSD 23-2002 Lighting Systems Division: Recommended Practice — Lamp Seasoning for Fluorescent Dimming Systems

1 lamp

2 lamp

Input & Control Wiring Options:

LOW-VOLTAGE CONTROL

POWERLINE CONTROL

Item Number

51467 QHE 2 x 54T5HO / UNV DIM-TCL

System Type - DIMMING/Case Size

QUICKTRONIC High Efficiency

Line Voltage (120-277V)

Number of Lamps (2)

Primary Lamp Wattage

T5HO POWERSENSE®

High Efficiency

Performance Guide

Data shown based upon SYLVANIA PENTRON® lamp(s). QUICKTRONIC® POWERSENSE ballasts are also compatible with other lamp manufacturers equivalent lamp types that meet ANSI specifications. Not to be used with Energy Saving T5HO lamps.

Specifications

Data based on FP28

Starting Method: Programmed Rapid Start

Circuit Type: Series

Lamp Frequency: >40kHz

Lamp CCF: Less than 1.7

Starting Temp: 50°F/10°C minimum⁴

Input Voltage: 120-277V, ±10%

Input Frequency: 50/60 Hz

THD: <10% @ Full Output

Power Factor: >98% @ Full Output

UL Listed Class P, Type 1 Outdoor

CSA or C/UL Certified

70°C Max Case Temperature

FCC 47CFR Part 18 Non-Consumer

Class A Sound Rating

RoHS Compliant⁴

ANSI C62.41 Cat. A Transient Protection

Remote Mounting (Max. wire length from ballast case to lampholder): up to 4ft

4 Complies with European Union Restriction of Hazardous Substances Directive. (Directive 2002/95/EC)

5 FT55DL starting Temperature 60°F/16°C

Control Information

QUICKTRONIC POWERSENSE ballasts are compatible with a wide range of low voltage (0-10VDC) and power line fluorescent controllers available from various manufacturers.

Low Voltage Control Specs: Ballast will source up to 0.5mA for 0-10VDC control purposes. May be wired as a Class 1 or Class 2 circuit-consult Local and National Electrical Codes.

Power Line Control Specs: Specification-grade fluorescent controls are available for 120V or 277V operation of controllably analog electronic fluorescent ballasts. Controls must be suitably rated for both the type (e.g. Fluorescent Phase-control) and size (e.g. 600W) of the connected load.

System Life / Warranty

QUICKTRONIC products are covered by the QUICK 60+® warranty, a comprehensive lamp and ballast system warranty. For additional details, refer to the QUICK 60+ warranty bulletin.

OSRAM SYLVANIA National Customer Service and Sales Center

1-800-LIGHTBULB (1-800-544-4828)

www.sylvania.com

Specifications subject to change without notice.

SYLVANIA, PENTRON, QUICKSENSE, the system solution, QUICK60+, PROStart, POWERSENSE and See the World in a New Light are registered trademarks of OSRAM SYLVANIA Inc. ELOGIC is a trademark of OSRAM SYLVANIA Inc. QUICKTRONIC is a registered trademark of OSRAM AG.

the system solution®


©2012 OSRAM SYLVANIA

Hi-lume® A-Series Driver Overview EcoSystem® or 3-wire control

Hi-lume® A-Series Driver is a high-performance LED driver that provides smooth, continuous 1% dimming for virtually any LED fixture, whether it requires constant-current or constant-voltage. It is the most versatile LED driver offered today due to its compatibility with a wide variety of LED arrays, multiple form factors, and numerous control options.

Features

- Continuous, flicker-free dimming from 100% to 1%.
- Compatible with Energi Savr Node™ unit with EcoSystem®, GRAFIK Eye® QS control unit, PowPak® dimming module with EcoSystem®, and Quantum® systems, allowing for integration into a planned or existing EcoSystem® lighting control solution. Please see **Compatible Controls** chart or contact Lutron for details regarding compatible controls.
- Standard 3-wire, line-voltage phase-control technology for consistent dimming performance and compatibility with all Lutron® 3-wire fluorescent controls.
- QwikFig™ compatible. For more information please refer to Lutron® P/N 041473 (K and M case only).
- Line voltage miswire protection on EcoSystem® control inputs.
- 100% performance tested at factory.
- A rated lifetime of 50,000 hours @:
 - $t_c = 149^\circ\text{F}$ (65°C) for 40 W drivers
 - $t_c = 158^\circ\text{F}$ (70°C) for 50 W drivers
- UL® recognized for United States and Canada.
- Type TL Rated.
- FCC Part 15 compliant for commercial applications at 120 V~ or 277 V~.
- Pulse Width Modulation (PWM) or Constant-Current Reduction (CCR) dimming methods available. See Application Note #360 for details.
- RoHS Compliant.
- For more information please go to: www.lutron.com/HiLumeLED

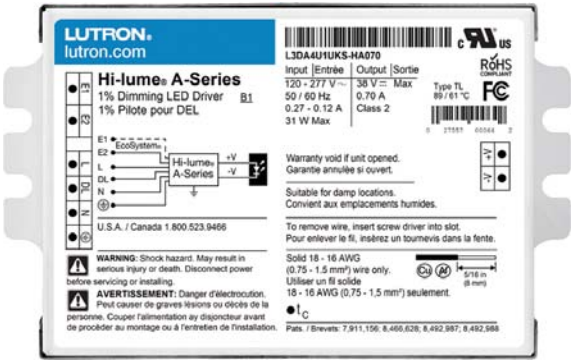

Hi-lume® A-Series, case type K

3.00 in (76 mm) W x 1.00 in (25 mm) H x 4.90 in (124 mm) L



Hi-lume® A-Series, case type M

1.18 in (30 mm) W x 1.00 in (25 mm) H x 14.25 in (362 mm) L



Hi-lume® A-Series, case type KL

K-case mounted on a 4.00 in (102 mm) W x 1.50 in (38 mm) H x 4.00 in (102 mm) L junction box to provide UL® listed wiring compartment

The Hi-lume® A-Series family of drivers includes models which operate at a maximum power of 40 W or less as well as models which can operate up to 50 W.

- 40 W or less models - output ranges A-M and X-Z
- 50 W models - output ranges N and W (K-case only)

For a description of the output ranges please see following pages.

LUTRON® SPECIFICATION SUBMITTAL

Page

Job Name:	Model Numbers:
Job Number:	

Specifications

Regulatory Approvals

- Meets ANSI C62.41 category A surge protection standards up to and including 4 kV.
- FCC Part 15 compliant for commercial applications at 120 V~ or 277 V~.
- Manufacturing facilities employ ESD reduction practices that comply with the requirements of ANSI/ESD S20.20.
- Lutron® Quality Systems registered to ISO 9001.2008.
- UL® 8750 recognized.
- UL® 8750 listed form factor available.
- Class 2 output available.
- Models available to meet LED Driver requirements for Energy Star 1.1.
- Type TL Rated.

UL® 8750 Listed Option

- cULus® for United States and Canada available for certain operating regions.
- Pre-wired and installation ready.
- See **KL Enclosure** page for more specific details regarding UL® listed option.

Environmental

- Sound Rating: Inaudible in 27 dB ambient.
- Relative Humidity: Maximum 90% non-condensing.
- Minimum operating ambient temperature $t_a = 32\text{ }^{\circ}\text{F}$ ($0\text{ }^{\circ}\text{C}$).

Performance

- Dimming Range: 100% to 1%.
- Operating Voltage: 120–277 V~ at 50/60 Hz.
- Lifetime: 50,000 hours @:
 - $t_c = 149\text{ }^{\circ}\text{F}$ ($65\text{ }^{\circ}\text{C}$)¹ for 40 W drivers.
 - $t_c = 158\text{ }^{\circ}\text{F}$ ($70\text{ }^{\circ}\text{C}$)¹ for 50 W drivers.
 - For rated warranty, t_c not to exceed the maximum rated temperatures listed here.¹
- Patented thermal foldback protection.
- LEDs turn on to any dimmed level without going to full brightness.
- Non-volatile memory restores all driver settings after power failure.
- Power Factor: >0.90 for loads greater than 25 W
- Standby Power Consumption: < 1.0 W
- Total Harmonic Distortion (THD): <20% for loads greater than 25 W.
- Inrush Current: < 2 A.
- Inrush Current Limiting Circuitry: eliminates circuit breaker tripping, switch arcing and relay failure.
- Open circuit protected.
- Short circuit protected.
- Turn-on time: ≤ 1.5 seconds.²
- PWM Dimming Frequency: 550 Hz.

Driver Wiring & Mounting

- Driver is grounded by a mounting screw to the grounded fixture (or by terminal connection on the K-case).
- Terminal blocks on the driver accept one solid wire per terminal from 18 AWG to 16 AWG (0.75 mm^2 to 1.5 mm^2).
- Fixture must be grounded in accordance with local and national electrical codes.
- For maximum driver to LED light engine wire lengths see **Driver Leads** section at end of document.

¹ Installer is responsible for ensuring that the driver case temperature does not exceed the maximum rated temperature.

² Models available with turn-on time ≤ 1 second.

Job Name:	Model Numbers:
Job Number:	

How to Build a Model Number: Hi-lume® A-Series

L3DA U1U

Maximum Power:

4 = 40 W maximum

5 = 50 W maximum
(K-case only)

Case Size:

K = Compact

M = Stick

Case Style:

S = Studded
(K case only)

N = Non-Studded

L = UL® Listed
(K case only)

Example: L3DA4U1UKS-HC070

For further assistance selecting your model number, contact our LED Center of Excellence at 1.877.346.5338 or LEDs@lutron.com

Current Level (for Constant-Current):

020 = 0.20 A; 021 = 0.21 A . . . 070 = 0.70 A . . . 210 = 2.10 A

Voltage Level (for Constant-Voltage):

100 = 10.0 V; 105 = 10.5 V . . . 600 = 60.0 V

Driver Output:

C = Constant-current driver
with pulse width modulation (PWM) dimming

A = Constant-current driver
with constant-current reduction (CCR) dimming

V = Constant-voltage driver
with pulse width modulation (PWM) dimming

LED Load Output Range (see the following pages for more detail):

40 W Drivers

Class 2 Constant-Voltage

A = 10.0 V–12.0 V

B = 12.5 V–20.0 V*

C = 20.5 V–24.0 V*

D = 24.5 V–38.0 V*

Isolated Non-Class 2 Constant-Voltage

X = 38.5 V–60.0 V*

Class 2 Constant-Current

E = 0.20 A–0.50 A 30 V–54 V

F = 0.51 A–1.00 A 30 V–54 V*

G = 0.20 A–0.70 A 8 V–20 V

H = 0.20 A–0.70 A 15 V–38 V

I = 0.71 A–1.05 A 8 V–20 V

J = 0.71 A–1.05 A 15 V–38 V

K = 1.06 A–1.50 A 8 V–20 V

L = 1.06 A–1.50 A 15 V–38 V*

M = 1.51 A–2.10 A 8 V–19.9 V*

Isolated Non-Class 2 Constant-Current

Y = 0.20 A–0.50 A 30 V–60 V

Z = 0.51 A–1.00 A 30 V–60 V*

50 W Drivers

Class 2 Constant-Current

N = 0.71 A–1.05 A 35 V–54 V*

Isolated Non-Class 2 Constant-Current

W = 0.71 A–1.05 A 35 V–60 V*

* Output parameter is power-limited for these output ranges. Consult detailed specifications on the following pages for each range.

Job Name:

Model Numbers:

Job Number:

How to Build a Bulk Model Number (For use with Lutron® QwikFig™ technology): Hi-lume® A-Series

40 W Drivers

L3DA4U1U - BLK

Case Size:

K = Compact
M = Stick

Case Style:¹

S = Studded
(K-case only)
N = Non-Studded
(All M-case models)

Bulk Models:

Coverage based on “LED Load Output Range” from standard non-configurable models shown in the **How to Build a Model Number** section.

Example Standard model number: L3DA4U1UKS-**H**C070 has LED load output range = H

K-case and M-case

1A = Covers “LED Load Output Range” Y and Z

2A = Covers “LED Load Output Range” M

3A = Covers “LED Load Output Range” E and F (CCR dimming only)

K-case only

2G = Covers “LED Load Output Range” G

2H = Covers “LED Load Output Range” H

2R = Covers “LED Load Output Range” I and K

2S = Covers “LED Load Output Range” J and L

M-case only

2B = Covers “LED Load Output Range” H, J, and L

2C = Covers “LED Load Output Range” G, I, and K

50 W Drivers

L3DA5U1UK - BLK

Case Style:

S = Studded
N = Non-Studded

1B = Covers “LED Load Output Range” W

3B = Covers “LED Load Output Range” N (CCR dimming only)

Note: Only the model numbers falling into the structure listed above can be configured with QwikFig™. Standard model numbers configured at Lutron will not be capable of being reconfigured at another facility.

¹ QwikFig™ bulk drivers are only available as UL® recognized.

Job Name:

Model Numbers:


Job Number:

Radio Powr Savr™ Wireless Occupancy/Vacancy Ceiling Sensor

Lutron® Radio Powr Savr™ occupancy/vacancy sensors are wireless, battery-powered, passive infrared (PIR) sensors that automatically control lights via RF communication to compatible dimming and switching devices. These sensors detect the heat (IR radiation of 9.5 μm) from people moving within an area to determine when the space is occupied. The sensors then wirelessly transmit the appropriate commands to the associated dimming and switching devices to turn the lights on or off automatically. They combine both convenience and exceptional energy savings potential along with ease of installation.

Features

- Wireless occupancy sensor has 3 settings available: Auto-On/Auto-Off, Auto-On Low-Light/Auto-Off, and Manual-On/Auto-Off
- Auto-On Low-Light feature will turn lights on automatically only if there is less than approximately 10 Lux (1 fc) of ambient light
- Vacancy-only model available to meet California (U.S.A.) Title 24 requirements
- Uses Clear Connect® technology
- Passive infrared motion detection with exclusive Lutron® XCT™ Technology for fine motion detection
- 360° coverage ranges from 324 ft² (30.2 m²) to 676 ft² (62.4 m²), depending on mounting height
- Simple and intuitive adjustments available for Timeout, Auto-On, and Activity settings
- Supports advanced occupancy features, such as dependent occupancy groups and customizable occupied/unoccupied presets in some systems
- Multiple sensors can be added for extended coverage. Refer to product specification submittal of receiving device to determine system limits
- Lens illuminates during test mode to verify ideal locations
- Multiple ceiling-mount methods available for different ceiling materials
- Front accessible test buttons make programming easy
- 10-year battery life design
- RoHS compliant

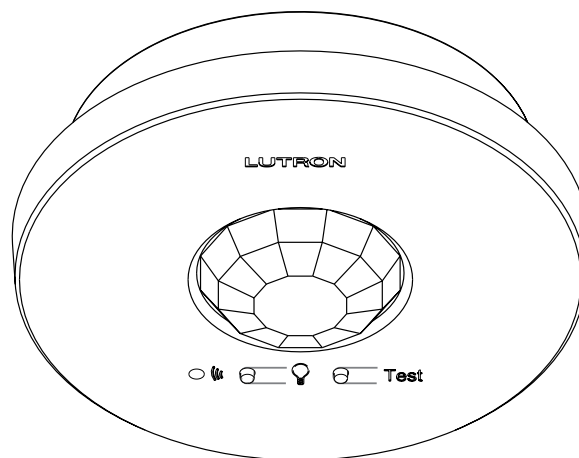

Models Available

- LRF-OCR2B-P-WH
 - Color Code
 - Occupancy and Vacancy
 - Frequency/Channel Code
- LRF2-VCR2B-P-WH
 - Vacancy Only
 - Available for Channel Code 2 Only

Frequency/Channel Codes

Available

- 2 = 431.0–437.0 MHz (U.S.A., Canada, Mexico, Brazil)
- 3 = 868.125–869.850 MHz (Europe, U.A.E.)
- 4 = 868.125–868.4755 MHz (China, Singapore)
- 5 = 865.5–866.5 MHz (India)
- 6 = 312.3–314.8 MHz (Japan)
- 7 = 433.05–434.79 MHz (Hong Kong, Macau)

Color Code

WH = White

Compatible RF Devices

- For use with Lutron® products only
- Communicates to various wireless Lutron® systems*

* Contact Lutron® Customer Service at www.lutron.com for frequency/channel code compatibility with your particular geographic region, and for integrating with other Lutron® lighting and shading products.

Job Name:	Model Numbers:
Job Number:	

Specifications

Regulatory

- Lutron® Quality Systems Registered to ISO 9001:2008

Standards Approved

LRF2- (USA and Canada)

- cULus Listed
- FCC certified
- IC certified
- Meets CA (U.S.A.) Energy Commission Title 24 requirements
- COFETEL
- ANATEL
- SUTEL

LRF3-

- CE marked (European Union)
- TRA type approval (United Arab Emirates)
- CITC type approval (Saudi Arabia)

LRF4-

- SRRC type approval (Mainland China)
- iDA registered (Singapore)

LRF5-

- WPC Type (India)

LRF6-

- 007YUUL0689

LRF7-

- FCC

Power/Performance

- Operating voltage: 3 V==
- Operating current: 14 µA nominal
- Requires one CR 123 lithium battery
- 10-year battery life
- Non-volatile memory (saved changes are stored during power loss)

Environment

- Temperature: 32 °F to 104 °F (0 °C to 40 °C)
- For indoor use only

Range

LRF2-, LRF3-, LRF4-, LRF5-, LRF7-

Local load controls must be located within 60 ft (18 m) line-of-sight, or 30 ft (9 m) through walls, of a sensor.

LRF6-

Local load controls must be located within 40 ft (12.2 m) line-of-sight, or 23 ft (7 m) through walls, of a sensor.

Sensor Coverage Test

- Front accessible test button
- Lens illuminates orange in response to motion during test mode and is visible from 60 ft (18 m)

Wireless Communication Test

- Front accessible test button
- Turn associated loads on and off

Timeout Options

- 1 minute*
- 5 minutes
- 15 minutes (default setting)
- 30 minutes

Auto-On Options (Occupancy Versions Only)

- **Enabled:** Sensor turns lights ON and OFF automatically (default setting).
- **Low Light:** Sensor turns lights ON automatically only in low ambient light conditions; sensor turns lights OFF automatically.
- **Disabled**:** Lights must be turned ON manually from dimming or switching device; sensor turns lights OFF automatically.

Activity Options

- **Low Activity:** $\frac{1}{2}$ (default setting)
- **Medium Activity:** $\frac{1}{4}$
- **High Activity:** $\frac{1}{8}$

* Intended for use in high-activity, briefly occupied areas only.

** During the 15-second grace period that begins when the lights are automatically turned off, the lights will automatically turn back on in response to motion. This grace period is provided as a safety and convenience feature in the event the lights turn off while the room is still occupied, so that the user does not need to manually turn the lights back on. After 15 seconds, the grace period expires and the lights must be manually turned on.

Job Name:	Model Numbers:
Job Number:	

Installation Overview

Sensor Setup

- Sensor setup is available as a service by Lutron. For more information see the Sensor Layout and Tuning service document (Lutron® P/N 3601235).

Sensor Placement

- To detect motion, the sensor requires line-of-sight of room occupants. The sensor must have an unobstructed view of the room. DO NOT mount behind or near tall cabinets, shelves, hanging fixtures, ceiling fans, etc. The sensor cannot see through glass objects such as patio- or shower doors.
- Hot objects and moving air currents can affect the performance of the sensor. To ensure proper operation, the sensor should be mounted at least 4 ft (1.2 m) away from HVAC vents and light bulbs that are below the ceiling line.
- The performance of the sensor depends on a temperature differential between the ambient room temperature and that of room occupants. Warmer rooms may reduce the ability of the sensor to detect occupants.

Mounting

Temporary mounting is optional to test sensor coverage and wireless communication before permanently installing the sensor.

Drop Ceiling (Compressed Fiber Ceiling Tile)



The mounting wire is provided for both temporary and permanent mounting of the sensor to ceiling tiles. It is designed to allow temporary mounting, testing, and repositioning (if necessary) of the sensor without damaging a ceiling tile. Once the final position of the sensor has been chosen, the mounting wire should be twisted together to permanently secure the sensor in place.

Solid Ceiling (Drywall, Plaster, Concrete, or Wood)

- Temporary mounting: Ten (10) temporary mounting strips can be purchased in the kit, L-CMDPIRKIT, for temporarily mounting and testing the sensor.
- Permanent mounting: Screws and anchors (for drywall or plaster) provided to mount the sensor.


Recess-Mount

- Do not recess-mount sensor in a metal surface.
- Recess-mounting ring requires an opening of 3 in (76 mm) in diameter.
- Recess-mounting ring secures internally to ceiling. Sensor twists into the recess mounting ring and sits flush with ceiling (see image below).
- Recess-mounting ring purchased as a separate kit: L-CRMK-WH.

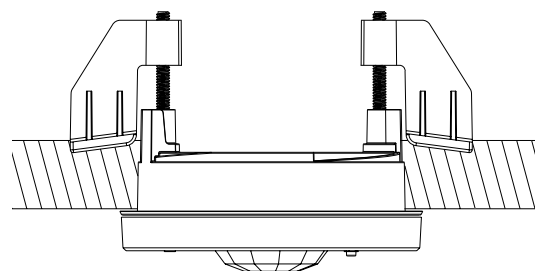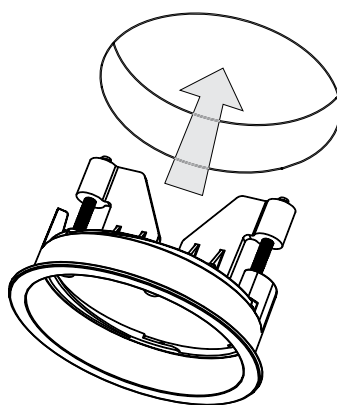


Job Name:	Model Numbers:
Job Number:	

Dimensions

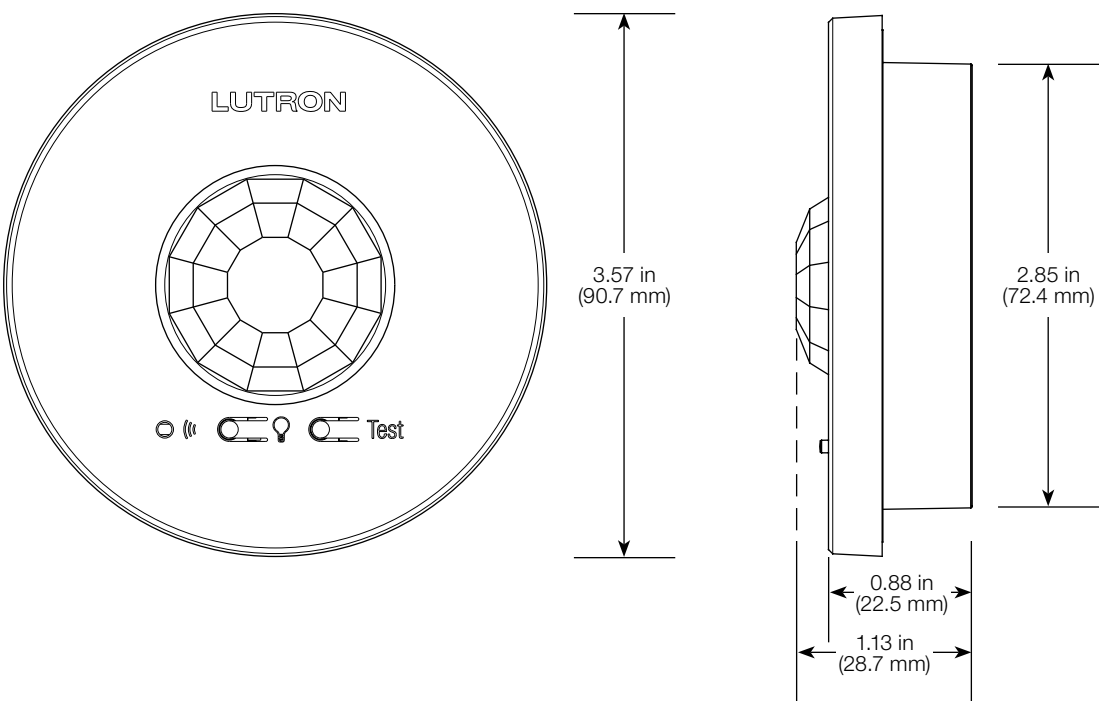

Range Diagrams

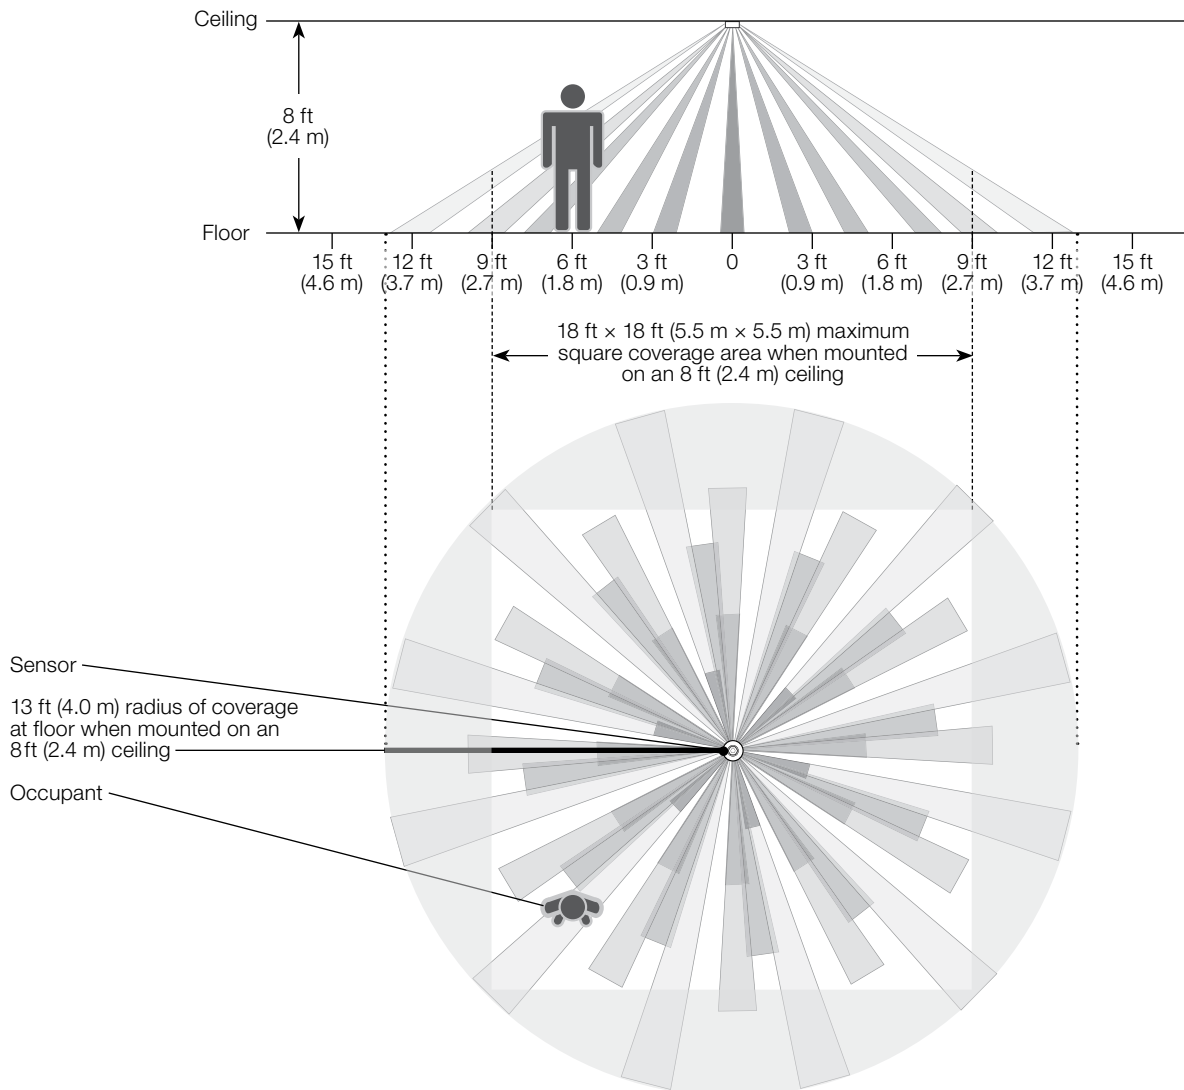

Sensor Coverage Chart (for sensor mounted in center of room)


Ceiling Height	Maximum Square Coverage Area*	
8 ft (2.4 m)	18 ft x 18 ft (5.5 m x 5.5 m)	324 ft ² (30.2 m ²)
9 ft (2.7 m)	20 ft x 20 ft (6.1 m x 6.1 m)	400 ft ² (37.2 m ²)
10 ft (3.0 m)	22 ft x 22 ft (6.7 m x 6.7 m)	484 ft ² (44.9 m ²)
12 ft (3.7 m)	26 ft x 26 ft (7.9 m x 7.9 m)	676 ft ² (62.4 m ²)

* 12 ft (3.7 m) is the recommended maximum mounting height

Job Name:	Model Numbers:
Job Number:	

Lens Masking

Whenever possible, the sensor should be installed in a location where it cannot view areas outside the intended space, such as hallways or adjacent rooms. If this situation cannot be avoided, portions of the lens may be masked to block the view of the sensor into undesired areas. Ten (10) PIR Lens Masks may be purchased in the kit, L-CMDPIRKIT.

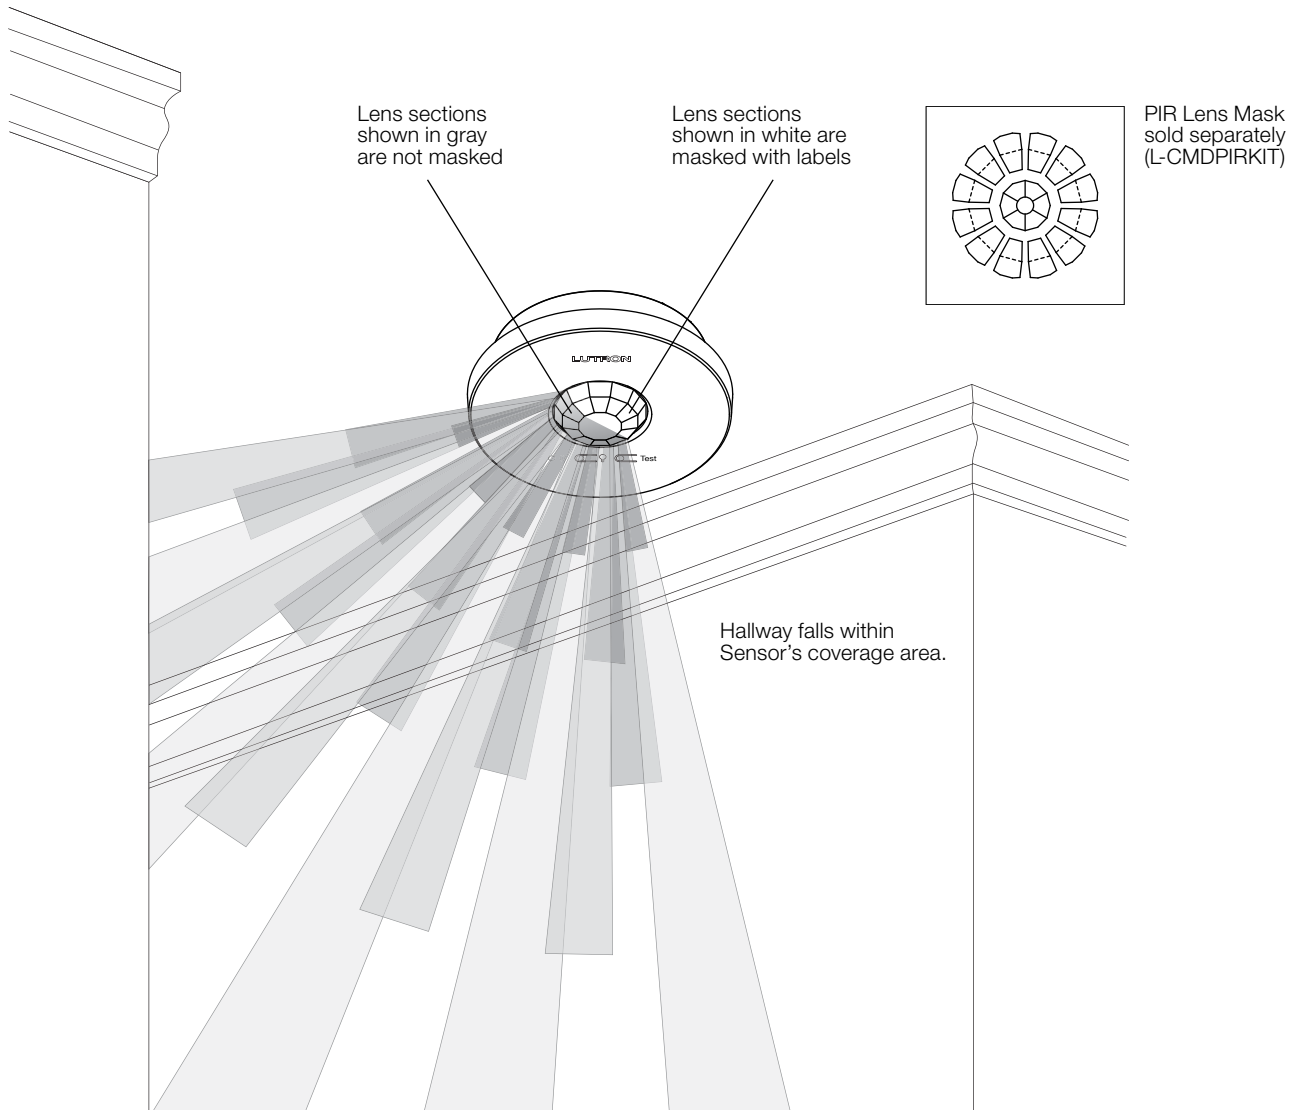

Job Name:

Model Numbers:


Job Number:

QS Timeclock

QS Timeclock is the premier energy-saving astronomic timeclock, and direct shade control, which are seamlessly integrated with Lutron's Energi Savr Node™ components and system.

Features

- Allows setup of shade presets using buttons on the control unit.
- Built-in astronomic timeclock.
- Info screen shows programming.
- Lockout option prevents accidental changes.
- One contact closure 24 V==
- QS communication link for seamless integration of lights, motorized window treatments, wallstations, and integration interfaces.

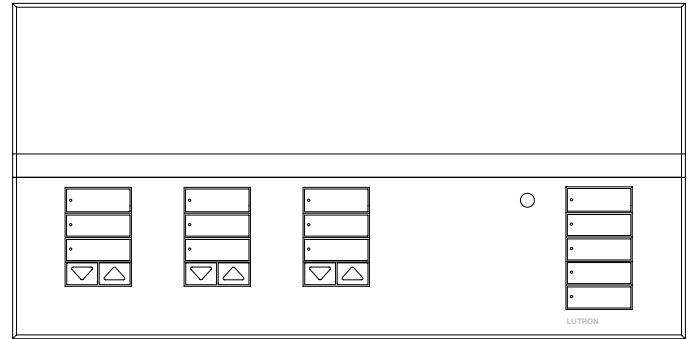


Model Numbers:

QSGR-TC-3S-WH-CPN5825 Timeclock with 3 shade columns

Note: All units ship with faceplate and buttons (white only)

System Topology

Example of Wired System

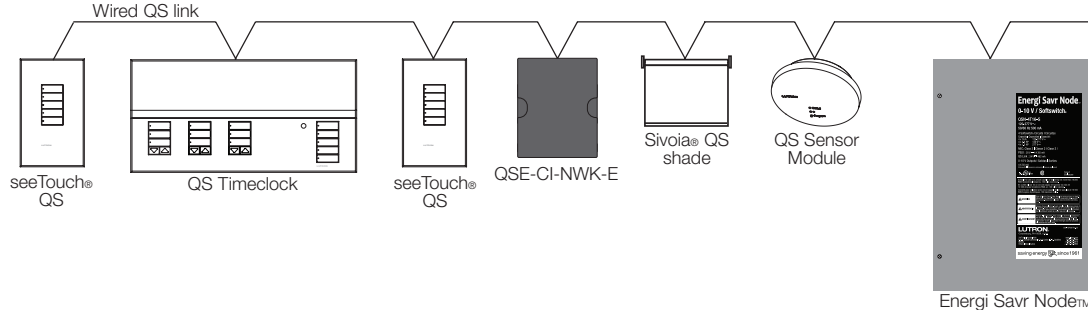

Job Name:

Model Numbers:

Job Number:

Specifications

Input Power

- 120 V~ 50/60 Hz 150 mA
- 240 V~ 50/60 Hz 75 mA

Key Design Features

- Tested to withstand 16 kV electrostatic discharge without damage or memory loss.
- Tested to withstand voltage surges of up to 6000 V~ and current surges of up to 3000 A. Lightning strike protection meets ANSI/IEEE 62.41-1980 standard.
- Power failure memory automatically restores Timeclock to the selection prior to power interruption.
- Faceplate is hinged at the top and bottom, and stays open at 180° for ease of access.

Environment

- 32 to 104 °F (0 to 40 °C)
- Relative humidity less than 90% non-condensing

Regulatory Requirements

- UL
- CSA
- CE

Info Screen

- OLED (organic LED) screen is viewable from all angles.
- Screen turns off when idle for 30 seconds.
- Programmable Timeclock schedules.
- Programmable shade labels.

System Communications and Capacities

- 24 V=== 150 mA IEC PELV/NEC® Class 2 wiring connects control units, wallstations, motorized shades, and control interfaces.
- A QS system can have up to 100 devices and 100 zones.
- The QS Timeclock counts as 1 device on the QS link.

Other Accessory Controls and Devices

- Energi Savr Node™ (ESN) unit
- QSE-IO
- QSE-CI-NWK-E
- GRAFIK Eye® QS
- QSPS (QS Link Power Supply - use if more than 3 devices are powered by the QS Timeclock)

Astronomic Timeclock

- 7 daily schedules available.
- One available holiday schedule is programmable by date up to one year in advance.
- 25 events per day maximum.
- Astronomic times are programmable by integral city database or by entering latitude and longitude. Times automatically adjust throughout the year based on location.
- Automatically adjusts for Daylight Saving Time (DST), adjusted for the new dates; DST is programmable.
- Afterhours feature allows occupants to temporarily override Timeclock events.

Preset Shade Control

- 3 columns of shade controls.
- Open, preset, close, and raise/lower shade buttons.
- Each shade column can be programmed to operate one shade or a group of shades.

Contact Closure Input (CCI) with Power Supply Output


- 24 V=== 50mA
- Each QS Timeclock has one contact closure input (Terminal A).
 - The attached device must provide a dry contact closure or solid-state output.
 - Input is miswire-protected up to 36 V===.
- Each QS Timeclock can supply 50 mA maximum at 24 V===.
 - An auxiliary power supply must be used if the device requires more than 50 mA.
- The CCI is capable of operating in the following modes
 - Afterhours: Allows the CCI to start and end the afterhours mode.
 - Timeclock: Allows the CCI to enable and disable the Timeclock.
 - Disable CCI: The CCI will have no effect on the system and will not appear on the list of available sensors.
 - Security lockout via password for Timeclock settings.

Job Name:


Model Numbers:

Job Number:

Mechanical Dimensions

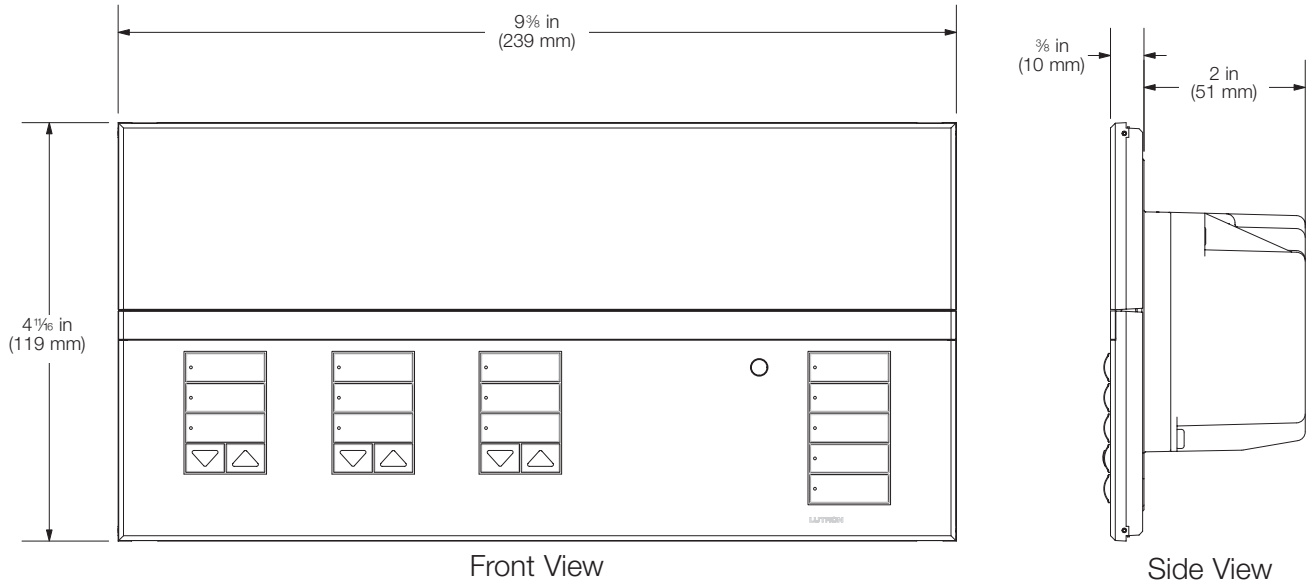

Fits into a 4-gang U.S. backbox, 3 1/2 in (89 mm) deep; Optional Lutron® P/N 241-400

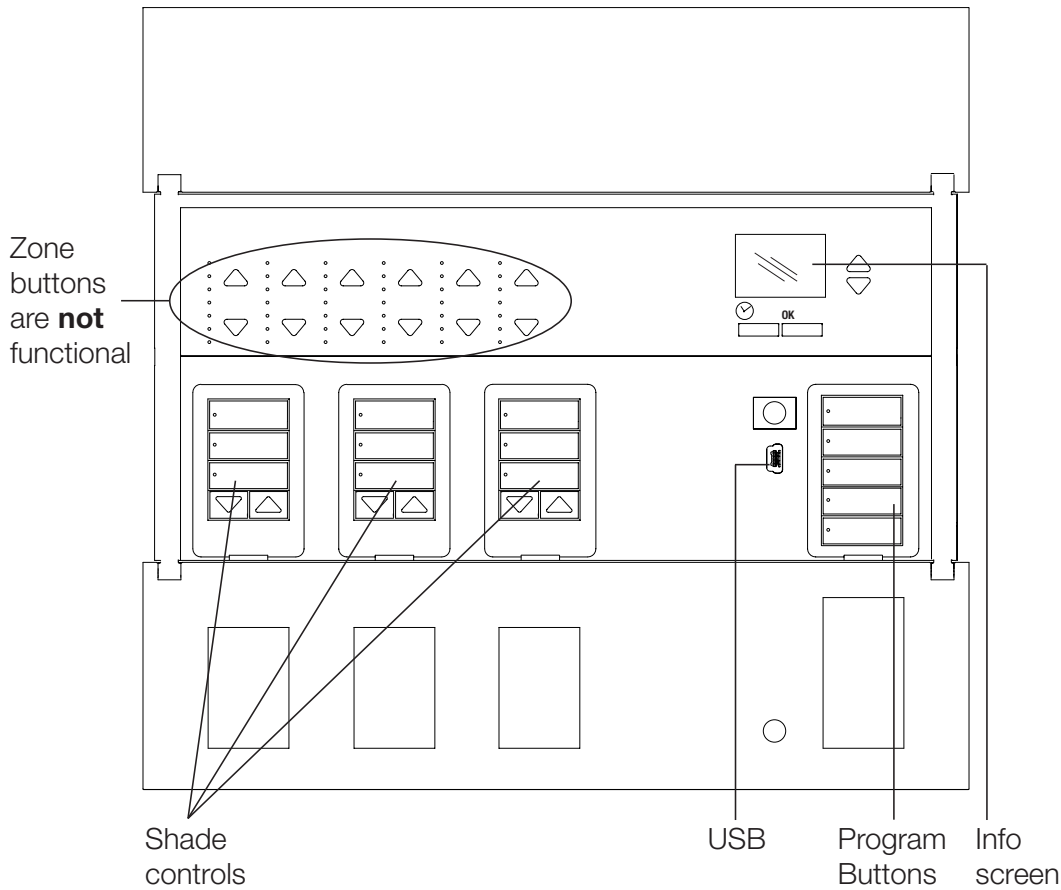

Job Name:


Model Numbers:

Job Number:


IEC PELV/NEC® Class 2 QS Communication Link Wiring

- Each IEC PELV/NEC® Class 2 terminal accepts up to two 1.0 mm² (18 AWG) wires.
- Connect the terminal 1, 3, and 4 connections to all control units, wallstations, and control interfaces.
- Each control unit has its own power supply. Terminate the terminal 2 connection (24 V_{AC} power) so that each control unit supplies power to a maximum of three wallstations. Each wallstation should receive power from only one control unit.
- Total length of control link must not exceed 610 m (2000 ft).
- Do not allow IEC PELV/NEC® Class 2 wires to contact line/mains wires.
- QS Timeclock provide 3 PDUs (Power Draw Units) on the QS Link. For more information, see Lutron® P/N 369-405, "Power Draw Units on the QS Link."

QS Communication Link Terminal Detail



Wiring Example

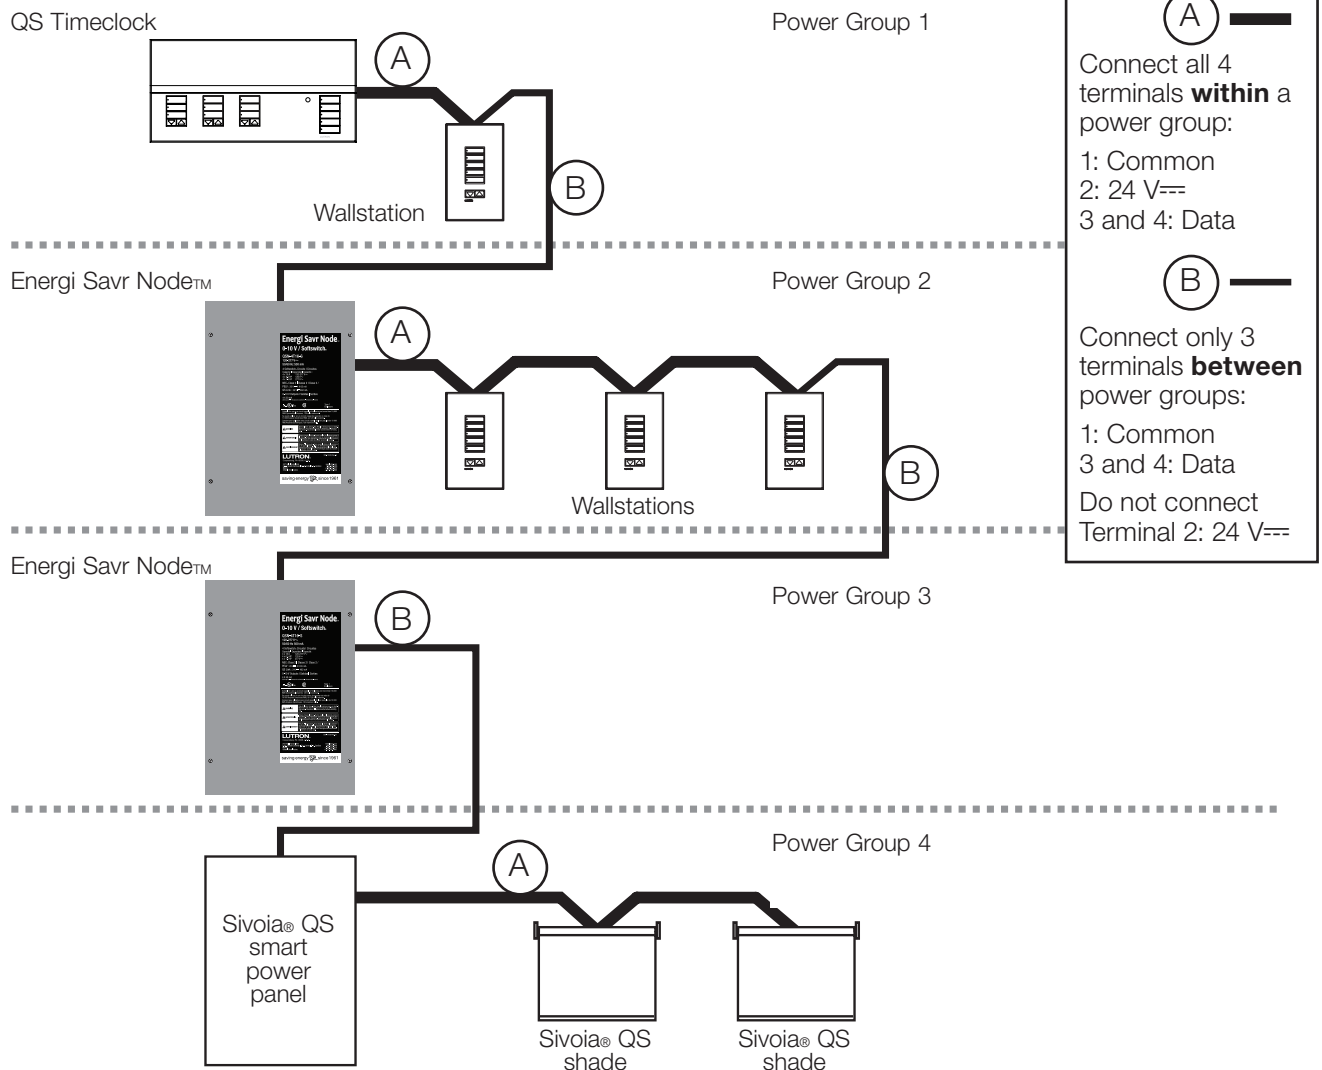


Job Name:

Model Numbers:


Job Number:

Wiring Examples

Daisy-Chain Wiring Example

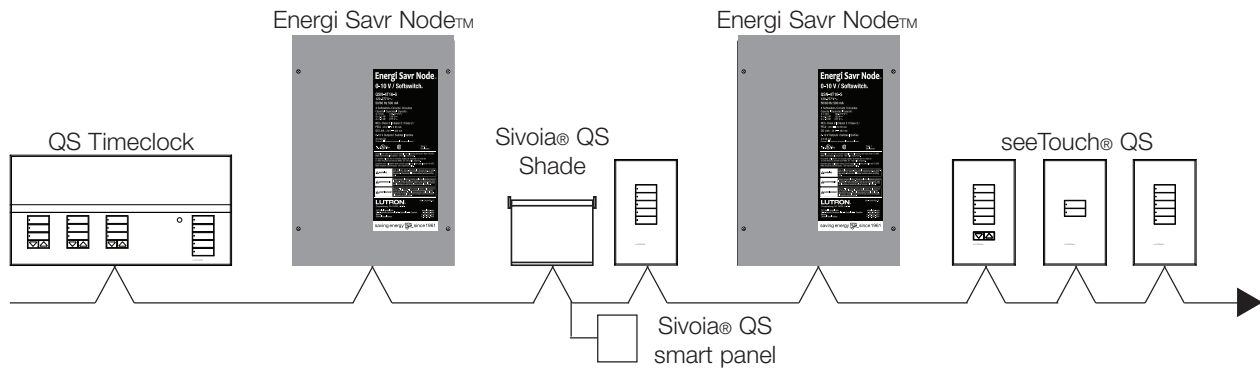

T-Tap Wiring Example

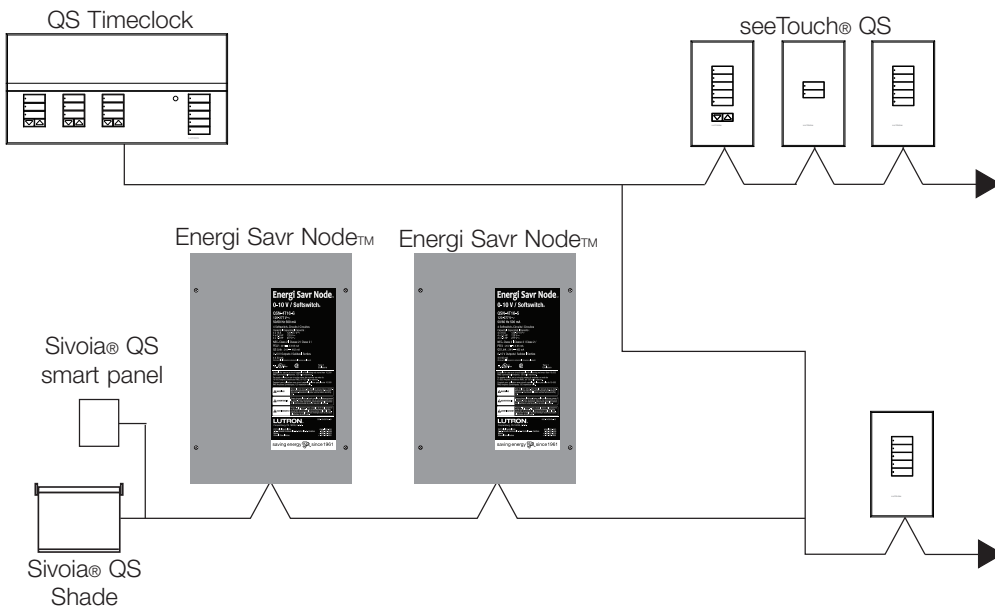


Job Name:

Model Numbers:


Job Number:

Line Voltage Wiring

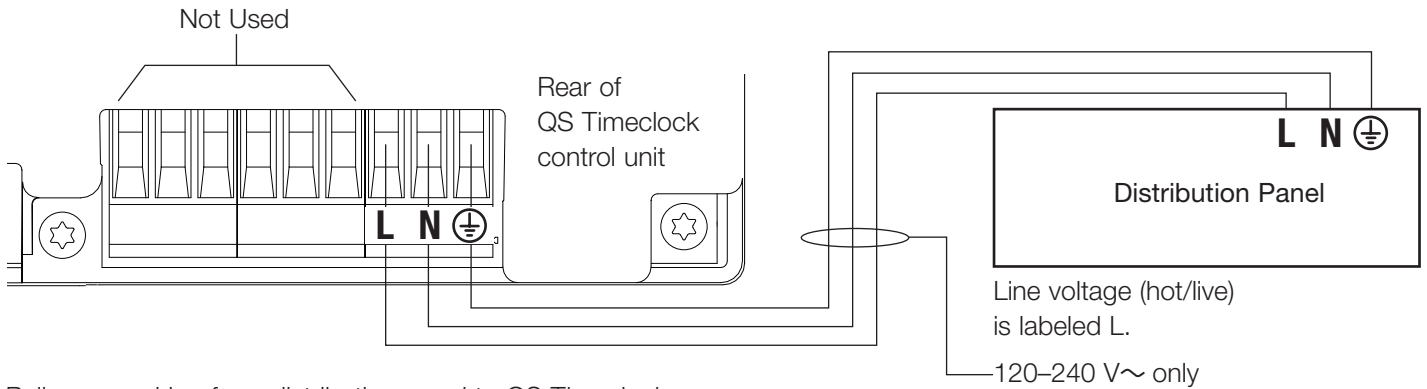

- Pull power wiring from distribution panel to QS Timeclock.
- Each line voltage terminal can accept one 2.5 mm² (12 AWG) wire.

Terminations

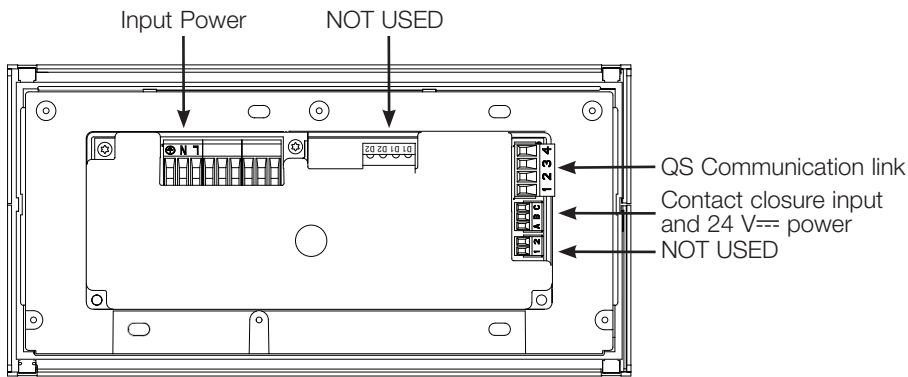

Wire Gauge


4.0 mm ² (12 AWG)	1.5 mm ² (16 AWG)
2.5 mm ² (14 AWG)	1.0 mm ² (18 AWG)

Job Name:

Model Numbers:

Job Number:

Mounting

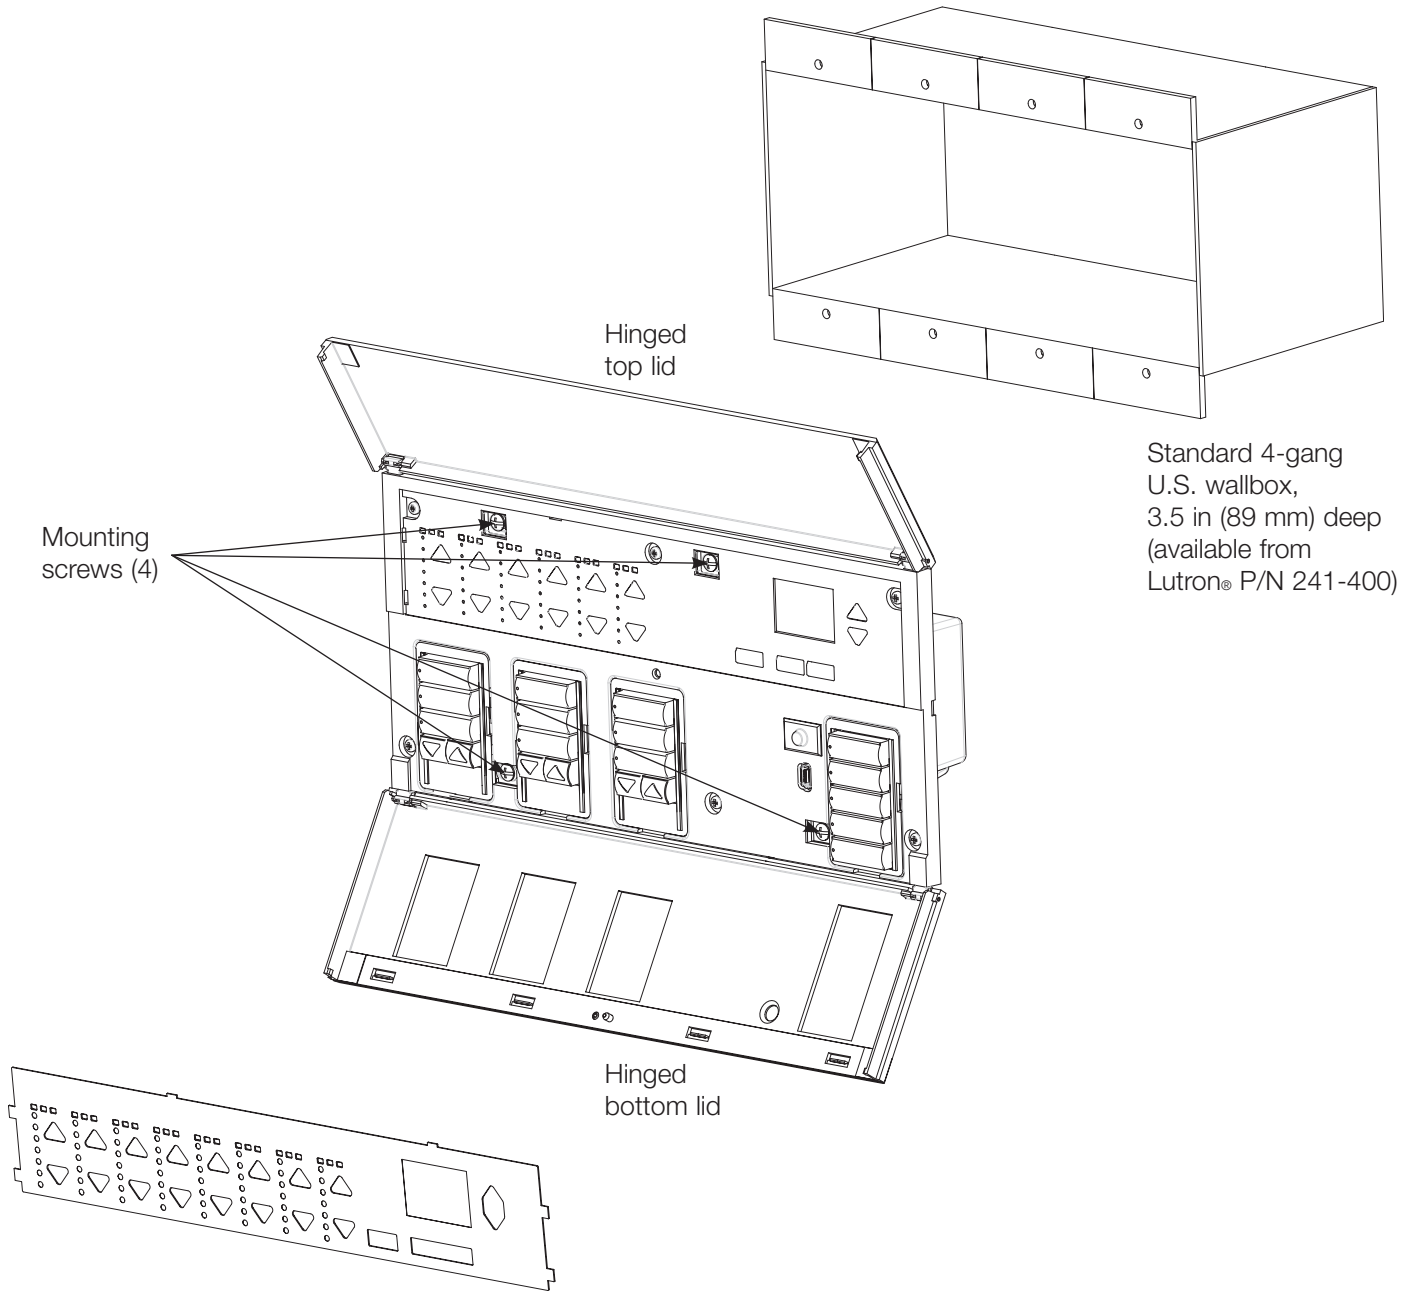

Job Name:

Model Numbers:

Job Number:

Appendix D - Vulcraft Manual




MEMBER



It's Our Nature. 

VULCRAFT

Steel Roof & Floor Deck

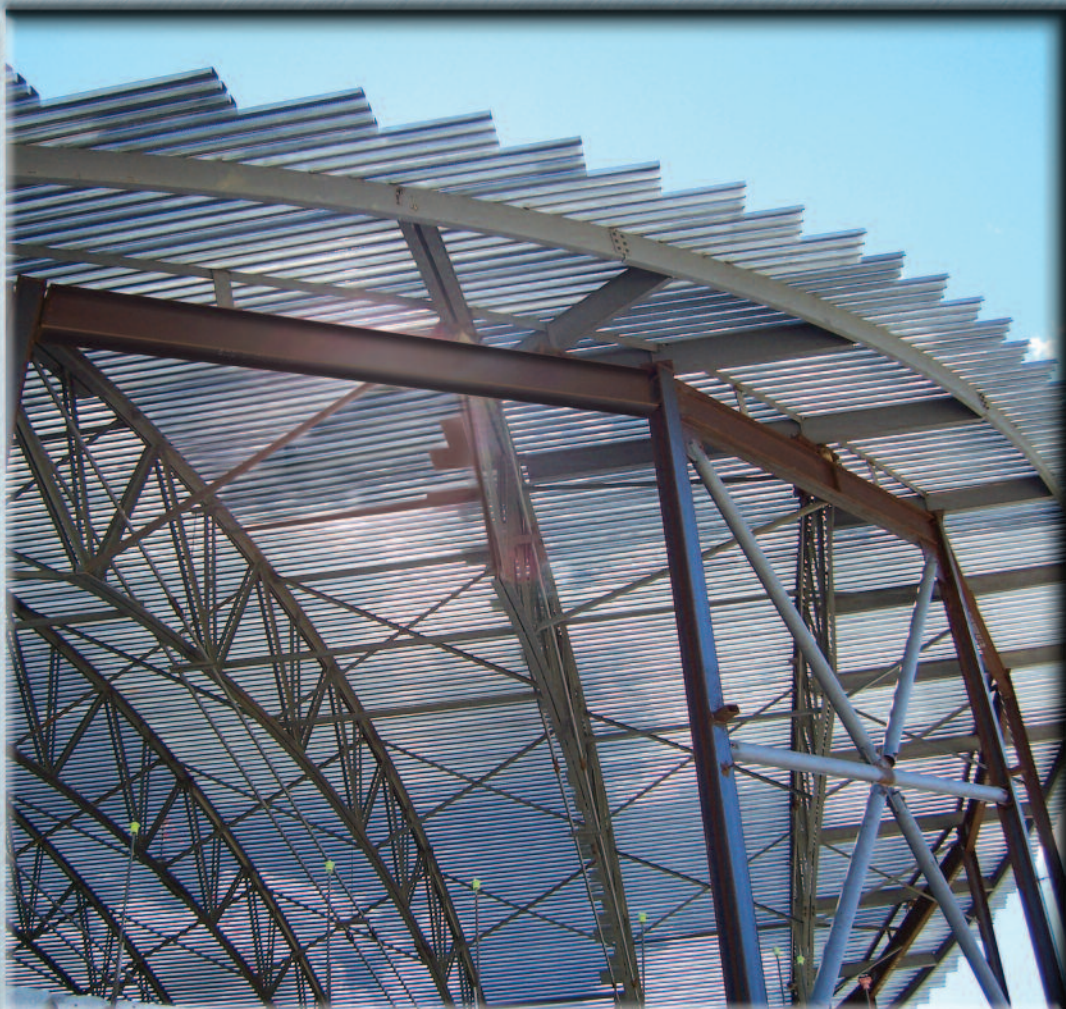

VULCRAFT
2008





5

STEEL DECK

1.5 B, BI, BA, BIA, BSV

Maximum Sheet Length 42'-0"
Extra charge for lengths under 6'-0"
ICC ER-3415
FM Global Approved²

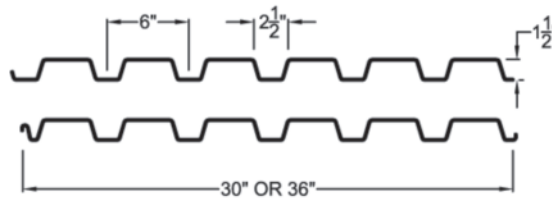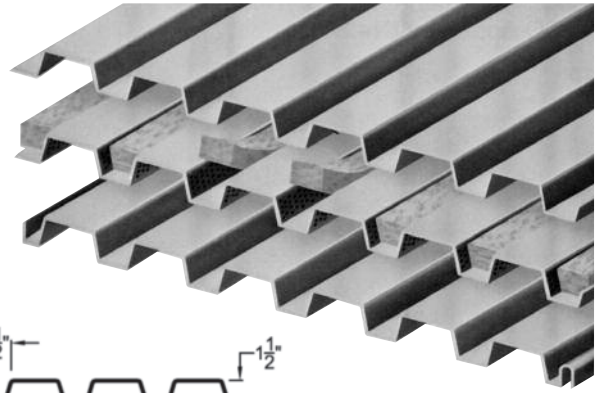

Interlocking side lap is not drawn to show actual detail.

ROOF

SECTION PROPERTIES

Deck type	Design thickness in.	W psf	Section Properties				V _a lbs/ft	F _y ksi
			I _p	S _p	I _n	S _n		
			in ⁴ /ft	in ³ /ft	in ⁴ /ft	in ³ /ft		
B24	0.0239	1.46	0.107	0.120	0.135	0.131	2634	60
B22	0.0295	1.78	0.155	0.186	0.183	0.192	1818	33
B20	0.0358	2.14	0.201	0.234	0.222	0.247	2193	33
B19	0.0418	2.49	0.246	0.277	0.260	0.289	2546	33
B18	0.0474	2.82	0.289	0.318	0.295	0.327	2870	33
B16	0.0598	3.54	0.373	0.408	0.373	0.411	3578	33

ACOUSTICAL INFORMATION

Deck Type	Absorption Coefficient						Noise Reduction Coefficient ¹
	125	250	500	1000	2000	4000	
1.5BA, 1.5BIA	.11	.18	.66	1.02	0.61	0.33	0.60

¹ Source: Riverbank Acoustical Laboratories.
Test was conducted with 1.50 pcf fiberglass batts and 2 inch polyisocyanurate foam insulation for the SDI.

Type B (wide rib) deck provides excellent structural load carrying capacity per pound of steel utilized, and its nestable design eliminates the need for die-set ends.

1" or more rigid insulation is required for Type B deck.

Acoustical deck (Type BA, BIA) is particularly suitable in structures such as auditoriums, schools, and theatres where sound control is desirable. Acoustic perforations are located in the vertical webs where the load carrying properties are negligibly affected (less than 5%).

Inert, non-organic glass fiber sound absorbing batts are placed in the rib openings to absorb up to 60% of the sound striking the deck.

Batts are field installed and may require separation.


VERTICAL LOADS FOR TYPE 1.5B

No. of Spans	Deck Type	Max. SDI Const. Span	Allowable Total (PSF) / Load Causing Deflection of L/240 or 1 inch (PSF)											
			Span (ft.-in.) ctr to ctr of supports											
			5-0	5-6	6-0	6-6	7-0	7-6	8-0	8-6	9-0	9-6	10-0	
1	B24	4'-8"	115 / 56	95 / 42	80 / 32	68 / 26	59 / 20	51 / 17	45 / 14	40 / 11	35 / 10	32 / 8	29 / 7	
	B22	5'-7"	98 / 81	81 / 61	68 / 47	58 / 37	50 / 30	44 / 24	38 / 20	34 / 17	30 / 14	27 / 12	25 / 10	
	B20	6'-5"	123 / 105	102 / 79	86 / 61	73 / 48	63 / 38	55 / 31	48 / 26	43 / 21	38 / 18	34 / 15	31 / 13	
	B19	7'-1"	146 / 129	121 / 97	101 / 75	86 / 59	74 / 47	65 / 38	57 / 31	51 / 26	45 / 22	40 / 19	36 / 16	
	B18	7'-8"	168 / 152	138 / 114	116 / 88	99 / 69	85 / 55	74 / 45	65 / 37	58 / 31	52 / 26	46 / 22	42 / 19	
	B16	8'-8"	215 / 196	178 / 147	149 / 113	127 / 89	110 / 71	96 / 58	84 / 48	74 / 40	66 / 34	60 / 29	54 / 24	
2	B24	5'-10"	124 / 153	103 / 115	86 / 88	74 / 70	64 / 56	56 / 45	49 / 37	43 / 31	39 / 26	35 / 22	31 / 19	
	B22	6'-11"	100 / 213	83 / 160	70 / 124	59 / 97	51 / 78	45 / 63	39 / 52	35 / 43	31 / 37	28 / 31	25 / 27	
	B20	7'-9"	128 / 267	106 / 201	89 / 155	76 / 122	66 / 97	57 / 79	51 / 65	45 / 54	40 / 46	36 / 39	32 / 33	
	B19	8'-5"	150 / 320	124 / 240	104 / 185	89 / 145	77 / 116	67 / 95	59 / 78	52 / 65	47 / 55	42 / 47	38 / 40	
	B18	9'-1"	169 / 369	140 / 277	118 / 213	101 / 168	87 / 134	76 / 109	67 / 90	59 / 75	53 / 63	48 / 54	43 / 46	
	B16	10'-3"	213 / 471	176 / 354	149 / 273	127 / 214	110 / 172	95 / 140	84 / 115	74 / 96	66 / 81	60 / 69	54 / 59	
3	B24	5'-10"	154 / 120	128 / 90	108 / 69	92 / 55	79 / 44	69 / 35	61 / 29	54 / 24	48 / 21	43 / 17	39 / 15	
	B22	6'-11"	124 / 167	103 / 126	87 / 97	74 / 76	64 / 61	56 / 50	49 / 41	43 / 34	39 / 29	35 / 24	31 / 21	
	B20	7'-9"	159 / 209	132 / 157	111 / 121	95 / 95	82 / 76	72 / 62	63 / 51	56 / 43	50 / 36	45 / 31	40 / 26	
	B19	8'-5"	186 / 250	154 / 188	130 / 145	111 / 114	96 / 91	84 / 74	74 / 61	65 / 51	58 / 43	52 / 37	47 / 31	
	B18	9'-1"	210 / 289	174 / 217	147 / 167	126 / 132	108 / 105	95 / 86	83 / 71	74 / 59	66 / 50	59 / 42	54 / 36	
	B16	10'-3"	264 / 369	219 / 277	185 / 214	158 / 168	136 / 135	119 / 109	105 / 90	93 / 75	83 / 63	74 / 54	67 / 46	

Notes: 1. Minimum exterior bearing length required is 1.50 inches. Minimum interior bearing length required is 3.00 inches.
If these minimum lengths are not provided, web crippling must be checked.
2. FM Global approved numbers and spans available on page 21.

2 VLI

Maximum Sheet Length 42'-0
Extra Charge for Lengths Under 6'-0
ICBO Approved (No. 3415)

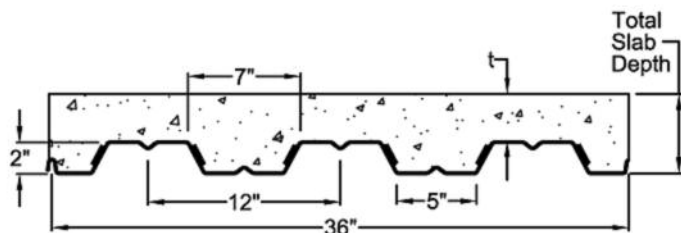

Interlocking side lap is not drawn to show actual detail.

STEEL SECTION PROPERTIES

Deck Type	Design Thickness in	Deck Weight psf	Section Properties				V _a lbs/ft	F _y ksi
			I _p in ⁴ /ft	S _p in ³ /ft	I _n in ⁴ /ft	S _n in ³ /ft		
2VLI22	0.0295	1.62	0.324	0.263	0.321	0.266	1832	50
2VLI20	0.0358	1.97	0.409	0.341	0.406	0.346	2698	50
2VLI19	0.0418	2.30	0.492	0.420	0.489	0.426	3190	50
2VLI18	0.0474	2.61	0.559	0.495	0.558	0.504	3608	50
2VLI16	0.0598	3.29	0.704	0.653	0.704	0.653	3618	40

(N=9.35) NORMAL WEIGHT CONCRETE (145 PCF)

TOTAL SLAB DEPTH	DECK TYPE	SDI Max. Unshored Clear Span			Superimposed Live Load, PSF															
					Clear Span (ft.-in.)															
		1 SPAN	2 SPAN	3 SPAN	5'-6	6'-0	6'-6	7'-0	7'-6	8'-0	8'-6	9'-0	9'-6	10'-0	10'-6	11'-0	11'-6	12'-0	12'-6	
4.00 (t=2.00) 39 PSF	2VLI22	7'-4	9'-6	9'-9	274	239	211	188	145	129	115	104	94	85	78	71	65	59	54	
	2VLI20	8'-7	10'-10	11'-2	310	269	236	210	188	170	155	117	106	96	87	80	73	67	61	
	2VLI19	9'-9	11'-11	12'-4	344	298	261	231	207	186	169	155	142	106	97	88	81	74	68	
	2VLI18	10'-9	12'-9	12'-9	373	324	285	253	228	206	188	172	159	147	137	103	95	87	81	
	2VLI16	11'-1	13'-2	13'-5	400	376	330	292	261	235	214	195	180	166	154	143	109	100	93	
4.50 (t=2.50) 45 PSF	2VLI22	6'-11	9'-0	9'-4	319	278	245	190	168	150	134	121	109	99	90	83	76	69	63	
	2VLI20	8'-2	10'-3	10'-7	361	313	275	244	219	198	152	136	123	112	102	93	85	78	72	
	2VLI19	9'-2	11'-5	11'-9	400	346	303	268	240	216	196	180	136	124	113	103	94	86	79	
	2VLI18	10'-2	12'-4	12'-4	400	376	331	295	264	239	218	200	184	171	130	119	110	102	94	
	2VLI16	10'-5	12'-6	12'-11	400	400	383	339	303	274	248	227	209	193	150	137	126	117	108	
5.00 (t=3.00) 51 PSF	2VLI22	6'-7	8'-7	8'-11	364	317	279	217	192	171	153	138	125	113	103	94	86	79	72	
	2VLI20	7'-9	9'-10	10'-2	400	356	313	278	249	193	173	156	141	128	116	106	97	89	82	
	2VLI19	8'-9	10'-11	11'-3	400	394	345	306	273	247	224	172	156	141	128	117	107	99	91	
	2VLI18	9'-7	11'-10	11'-11	400	400	377	336	301	273	249	228	210	162	148	136	126	116	107	
	2VLI16	9'-11	12'-0	12'-4	400	400	400	386	346	312	283	259	238	187	171	157	144	133	123	
5.50 (t=3.50) 57 PSF	2VLI22	6'-4	8'-0	8'-6	400	355	278	244	216	192	172	155	140	127	116	106	97	89	81	
	2VLI20	7'-5	9'-5	9'-9	400	400	351	312	244	217	194	175	158	143	131	119	109	100	92	
	2VLI19	8'-4	10'-5	10'-9	400	400	388	343	307	277	215	193	175	159	144	132	121	111	102	
	2VLI18	9'-2	11'-4	11'-7	400	400	400	377	338	306	279	256	199	182	167	153	141	130	121	
	2VLI16	9'-5	11'-6	11'-10	400	400	400	400	388	350	318	290	230	210	192	176	162	150	138	
6.00 (t=4.00) 63 PSF	2VLI22	6'-1	7'-5	8'-2	400	394	308	270	239	213	191	172	156	141	129	118	108	99	90	
	2VLI20	7'-1	9'-1	9'-4	400	400	390	346	271	241	215	194	175	159	145	132	121	111	102	
	2VLI19	8'-0	10'-1	10'-5	400	400	400	381	340	307	239	215	194	176	160	146	134	123	113	
	2VLI18	8'-10	10'-11	11'-3	400	400	400	400	375	339	309	243	221	202	185	170	157	145	134	
	2VLI16	9'-1	11'-1	11'-5	400	400	400	400	400	388	352	322	255	233	213	195	180	166	154	
6.50 (t=4.50) 69 PSF	2VLI22	5'-11	6'-11	7'-11	400	390	339	297	263	234	210	189	171	155	141	129	118	108	99	
	2VLI20	6'-11	8'-9	9'-0	400	400	400	337	297	264	237	213	193	175	159	145	133	122	112	
	2VLI19	7'-10	9'-8	10'-0	400	400	400	400	374	293	262	236	213	193	176	161	147	135	124	
	2VLI18	8'-7	10'-6	10'-11	400	400	400	400	400	373	340	268	243	222	203	187	172	159	147	
	2VLI16	8'-10	10'-8	11'-0	400	400	400	400	400	400	387	309	280	256	234	215	198	183	169	

- Notes: 1. Minimum exterior bearing length required is 2.00 inches. Minimum interior bearing length required is 4.00 inches.
If these minimum lengths are not provided, web crippling must be checked.
2. Always contact Vulcraft when using loads in excess of 200 psf. Such loads often result from concentrated, dynamic, or long term load cases for which reductions due to bond breakage, concrete creep, etc. should be evaluated.
3. All fire rated assemblies are subject to an upper live load limit of 250 psf.